Western Wireline

Noise / Temperature Log
Field Print

Company	Southern California Gas Company
Well	Standard Sesnon. #25
Field	Aliso Canyon
County	Los Angeles
State	California
Country	U.S.A.

Location:

API #:

SEC TWP RGE

Other Services

Permanent Datum	Ground Level	Elevation 2927
Log Measured From	D.F. of 6'	
Drilling Measured From	D.F.	

Elevation: K.B. 2927, D.F. 2933, G.L. --

Date	November 9, 2015
Run Number	One
Depth Driller	8749
Depth Logger	Not Tagged
Bottom Logged Interval	8432
Top Log Interval	Surface
Open Hole Size	N/A
Type Fluid	Polymer
Density / Viscosity	10.9 PPG
Max. Recorded Temp.	131.4 degF
Estimated Cement Top	N/A
Time Well Ready	10:30 A.M.
Time Logger on Bottom	117:00 P.M.
Equipment Number	306
Location	Ventura
Recorded By	D.A. Hall
Witnessed By	No Witness

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String				
Prot. String				
Production String				
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Field Print

No Correlation log available.
Depth Correlated to downhole jewelery
Tool telemetry failures from approx. 410 feet to 1400 feet due to very cold temperatures and rapid changes in temperature

Western Wireline

Temperature Noise log

5" = 100'

Database File	socalgas_11-9-15_hoist_noise_temp_caliper.db
Dataset Pathname	_dlog3_
Presentation Format	noise
Dataset Creation	Mon Nov 16 10:34:57 2015
Charted by	Depth in Feet scaled 1:240

-1	CCL	9
0	TEMP (degF)	150

2	2000HZ (mV)	20000
2	1000HZ (mV)	20000
2	600HZ (mV)	20000
2	200HZ (mV)	20000

TEMP (degF)



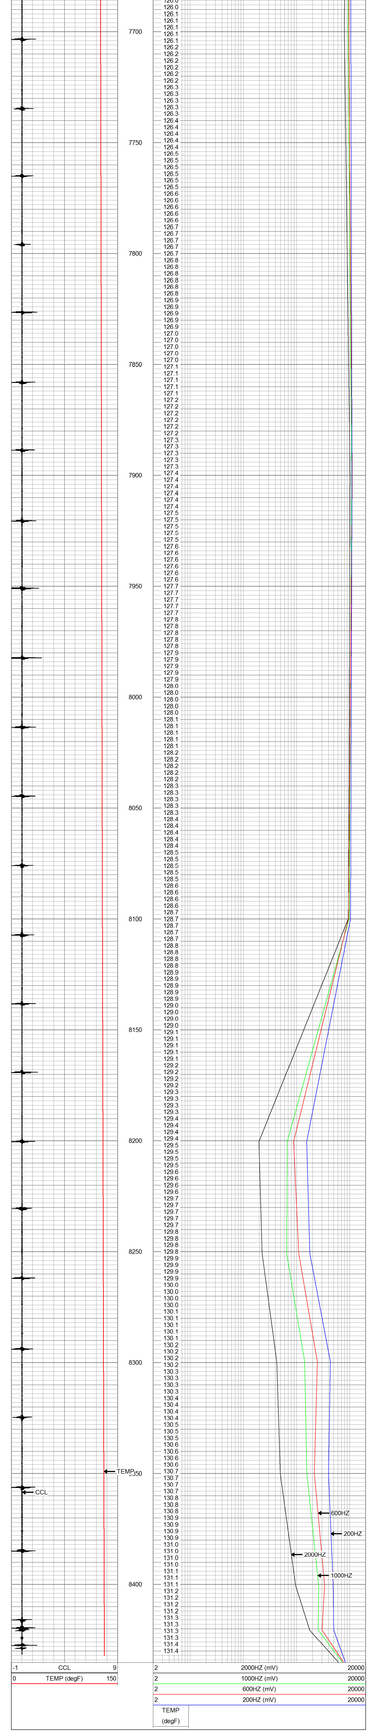

Survey Table: field/well/run1/_noise_/_survtabl_/1

#	Depth	Time	200Hz	600Hz	1000Hz	2000Hz	4000Hz	6000Hz
29	750.85	17:13:35	9549.7	9138.0	8394.0	7121.2	5237.7	4330.6
28	999.46	17:11:25	8637.5	6957.9	5814.4	4469.2	2717.6	2118.5
27	1998.57	17:05:04	6006.3	2832.8	1609.4	736.0	228.0	118.6
26	2999.20	16:58:13	5039.5	1452.0	662.9	219.9	94.5	51.6
25	3799.77	16:52:35	5540.4	3015.8	2056.2	1443.4	1088.6	973.4
24	3849.99	16:51:27	5497.9	1967.2	1348.6	838.3	599.9	470.5
23	3899.78	16:50:13	4684.1	1757.6	1282.6	939.6	730.3	609.6
22	3950.27	16:48:52	4416.5	1349.3	649.1	289.2	106.6	52.3
21	3998.49	16:47:19	5450.7	1542.3	750.8	239.0	103.8	55.7
20	4499.32	16:43:29	1853.1	1104.2	749.9	398.2	207.4	125.4
19	5200.24	16:38:23	8894.5	7313.5	6706.0	5300.2	4426.8	3637.9
18	5700.39	16:34:00	8946.9	7659.6	6939.9	6058.4	4475.2	3527.6
17	6197.84	16:29:30	7629.4	5489.5	4524.3	3473.0	2084.4	1654.2
16	6700.13	16:24:43	9704.0	9227.0	9132.2	7605.2	5834.5	5106.6
15	7199.71	16:20:00	10629.2	11010.2	11007.2	10466.2	8053.4	6933.5
14	7700.18	16:15:12	10471.5	9549.1	9267.2	7910.0	5388.1	4675.4
13	7900.58	16:12:47	11019.0	11115.3	10877.2	10128.1	8218.8	6870.9
12	8099.72	16:09:52	10350.7	9458.0	9729.8	9443.0	6841.3	5595.7
10	8200.45	16:07:16	1546.9	878.3	665.9	195.4	58.0	35.0
9	8250.79	16:05:32	1769.2	1095.1	649.6	224.3	74.3	41.3
8	8299.68	16:03:50	4314.4	2453.8	1417.6	423.7	118.9	68.6
7	8350.00	16:02:21	3982.9	2154.3	1554.7	492.6	148.0	74.6
6	8400.49	15:59:54	4863.5	3362.3	2595.5	955.8	263.1	124.5
5	8420.59	15:57:15	4982.6	3010.5	2550.6	1755.1	460.6	261.0
4	8435.21	15:54:38	8268.5	7666.4	7269.1	6145.7	4817.8	3975.5

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)
			CHD-STNDRD Standard Cable Head	1.00	1.44	5.00
			SBAR-169x5 Sinker Bar 1 11/16 by 5 foot	5.00	1.69	60.00
			SBAR-169x5 Sinker Bar 1 11/16 by 5 foot	5.00	1.69	60.00
			SBAR-1.69 1 11/16 Titan Tungsten Bar	7.00	1.69	63.00
			SBAR-2"7"	7.00	2.00	83.00
CCL	2.21		CCL-500 (IK848) 500 DegreeF Titan CCL	1.83	2.00	15.00
TEMP	0.19		TEMP-1.375TEMP (1AW76-05) Titan 1 3/8" 400 Deg. F. Temperature Tool Negative Pulse	1.29	1.38	6.00

Dataset: socalgas_11-9-15_hoist_noise_temp_caliper.db: field/well/run1/pass2
Total length: 28.13 ft
Total weight: 292.00 lb
O.D.: 2.00 in

Western Wireline

Company	Southern California Gas Company
Well	Standard Sesnon. #25
Field	Aliso Canyon
County	Los Angeles
State	California
Country	U.S.A.