ORIGINAL LOG

2" HOLE WAS PLGD BACK & SIDETRACKED

Dresser Atlas

Induction Electrolog

FILE NO. 1735

COMPANY E & B Natural Resources Management Corp.

WELL ~~XTRA~~ #29 037-22648

FIELD WILMINGTON

COUNTY LOS ANGELES STATE CALIFORNIA

LOCATION: N 4 042 282 E 4 204 030

Other Services: NONE

SEC. 19 TWP. 4S RGE. 13W

Permanent Datum G.L. Elev. 38'

Log Measured from K.B. 12 Ft. Above Permanent Datum

Drilling Measured from K.B.

Elevations: KB. 50' DF. -- GL. 38'

Date	4/28/82		
Run No.	ONE		
Service Order	46633		
Depth — Driller	3975		
Depth — Logger	3979		
Bottom Logged Interval	3974		
Top Logged Interval	600		
Casing — Driller	10 3/4" @ 600	@	@
Casing — Logger	600		
Bit Size	6 1/4"		
Type Fluid in Hole	CLAY BASE		
Density and Viscosity	9.7 43		
pH and Fluid Loss	9.5 6.2 cc	cc	cc
Source of Sample	FLOWLINE		
Rm @ Meas. Temp.	2.16 @ 60°F	@ °F	@ °F
Rmf @ Meas. Temp.	1.37 @ 60°F	@ °F	@ °F
Rmc @ Meas. Temp.	2.47 @ 60°F	@ °F	@ °F
Source of Rmf and Rmc	M		
Rm @ BHT	.91 @ 142°F	@ °F	@ °F
Time Since Circ.	4 HOURS		
Max. Rec. Temp. Deg. F	142 °F	°F	°F
Equip. No. and Location	6140 L.B.		
Recorded By	J. BIEHL		
Witnessed By	MR. WRIGHT		

FOLD HERE

Remarks:

EQUIPMENT DATA

	RUN NO. 1 IEL	GR	CALIPER	RUN NO. 2 IEL	GR	CALIPER	RUN NO. 3 IEL	GR	CALIPER
Tool Series No.	809								
Serial No.	31069								
Diameter	3.5"								
Tool Position	1.5"S.O.								
Detec. Model No.									
Type									
Dist. to N. Source									
Panel Series No.	3456								
Serial No.	34855								

LOGGING DATA

Run No.	Depths From	Depths To	Speed Ft./Min.	IEL Resistivity Scale (Ohm m²/m)	IEL Conductivity Scale (mmhos/m)	T.C. Sec.	GAMMA RAY Sens. Settings	Zero Div. L or R	API G.R. Units/Div.	CALIPER Scale (Inches)
1	3979	600	60	0-20	0-1000					

SPONTANEOUS POTENTIAL Millivolts	DEPTH	RESISTIVITY Ohms m²/m	CONDUCTIVITY Millimhos/m
− 10 +		16" NORMAL 0–4; 0–20; 0–200; INDUCTION RESISTIVITY 40" Spacing 0–20; 0–200	INDUCTION CONDUCTIVITY 40" Spacing 1000–0; 2000–1000

SPONTANEOUS POTENTIAL Millivolts	DEPTH	RESISTIVITY Ohms m²/m	CONDUCTIVITY Millimhos/m
− 10 +		INDUCTION RESISTIVITY 40" Spacing 0–200; 0–20; 16" NORMAL 0–200; 0–20; 0–4	2000–1000; 1000–0; INDUCTION CONDUCTIVITY 40" Spacing

Company	XTRA-ENERGY CORPORATION	Drillers T.D.	3975
Well	#29	Log F.R.	3974
Field	WILMINGTON	Log T.D.	3979
County	LOS ANGELES	Elevations:	
State	CALIFORNIA	K.B. 50' D.F. --	G.L. 38'

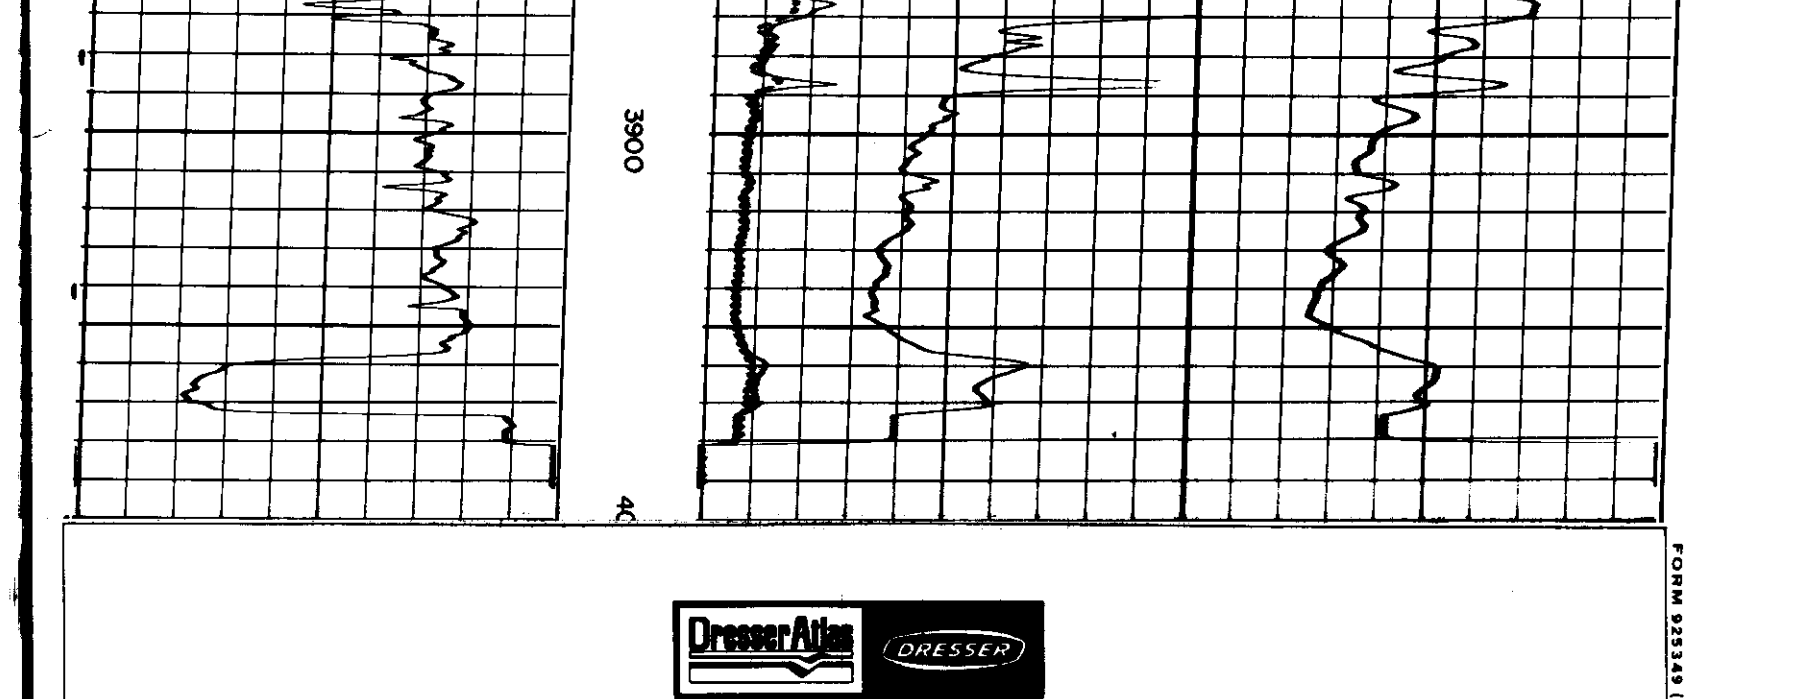

Dresser Atlas DRESSER

FORM 02524 (09/80)

RECEIVED NOV 5 1982 DIV. OF OIL & GAS LONG BEACH, CA.