Schlumberger

Company: Southern California Gas Company

Well: Porter 72B

Field: Aliso Canyon

County: Los Angeles State: California

County: Los Angeles
Field: Aliso Canyon
Location: 909 ft S and 668 ft W from station 84
Well: Porter 72B
Company: Southern California Gas Company

Ultrasonic Imager

Gamma Ray - CCL

9-5/8" 47# casing

Location:			
909 ft S and 668 ft W from station 84 section 27	Elev.:	K.B. 1933.00 ft G.L. 1909.00 ft D.F.	
Permanent Datum: Ground Level	Elev.:	1909.00 f	
Log Measured From: Kelly Bushing	24.00 ft	above Perm.Datum	
Drilling Measured From: Kelly Bushing			

API Serial No.	Section:	Township:	Range:
04-037-24146	27	3N	16W

Logging Date	28-Jun-2016		
Run Number	One		
Depth Driller	6693.00 ft		
Schlumberger Depth	6692.00 ft		
Bottom Log Interval	6692.00 ft		
Top Log Interval	24.00 ft		
Casing Fluid Type	Water		
Salinity			
Density	8.6 lbm/gal		
Fluid Level	8.00 ft		
BIT/CASING/TUBING STRING			
Bit Size	12.25 in		
From	815.00 ft		
To	6828.00 ft		
Casing/Tubing Size	9.625 in		
Weight	47 lbm/ft		
Grade	J55		
From	0.00 ft		
To	6828.00 ft		
Max Recorded Temperatures	168 degF		
Logger on Bottom Time	28-Jun-2016	08:37:00	
Unit Number Location:	3189	Ventura	
Recorded By	John Lopez		
Witnessed By	Mr Tom McMahon		

Disclaimer

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

Contents

1. Header
2. Disclaimer
3. Contents
4. Well Sketch
5. Borehole Size/Casing/Tubing Record
6. Remarks and Equipment Summary
7. Job Event Summary
8. USI Fluid Properties Measurement
9. Composite 1 Main Pass 5 in = 100 ft
   9.1 Integration Summary
   9.2 Software Version
   9.3 Composite Summary
   9.4 Log (LBV1_USI-VDL (DSLT) Cement 9.625inch)
   9.5 Parameter Listing
10. Composite 1 Main Pass 5 IN = 100 FT
   10.1 Integration Summary
   10.2 Composite Summary
   13.1 Integration Summary
   13.2 Composite Summary
   13.3 Log (Import of USI Goodwin)
14. 28Jun2016 Very Hi-Res Repeat 10 IN = 100 Ft
   14.1 Integration Summary
   14.2 Software Version
   14.3 Composite Summary
   14.4 Log (LBV1_USI Corrosion 9.625inch)
   14.5 Parameter Listing
15. 28Jun2016 Very Hi-Res Repeat 10 IN = 100 Ft
   15.1 Integration Summary
   15.2 Software Version
   15.3 Composite Summary
   15.4 Log (LBV1_USI Corrosion 9.625inch)
   15.5 Parameter Listing
16. 28Jun2016 Very Hi-Res Repeat 10 IN = 100 Ft
   16.1 Integration Summary

10.3 Log (LBV1_USI Composite 9.625inch)
11. Composite 1 Cement Log 2 IN = 100 FT
11.1 Integration Summary
11.2 Composite Summary
11.3 Log (LBV1_USI Cement 9.625inch)
12. Composite 1 Corrosion 5 in = 100 ft
12.1 Integration Summary
12.2 Composite Summary
12.3 Log (LBV1_USI Corrosion 9.625inch)
13. Composite 1 USI Compressed Goodwin
16.2 Software Version
16.3 Composite Summary
16.4 Log (LBV1_USI Corrosion 9.625inch)
16.5 Parameter Listing
17. XYZ (USI Fluid Acoustic Slowness vs Depth)
18. XYZ (USI Theoretical Acoustic impedance of mud vs Depth)
19. Tail

Well Sketch

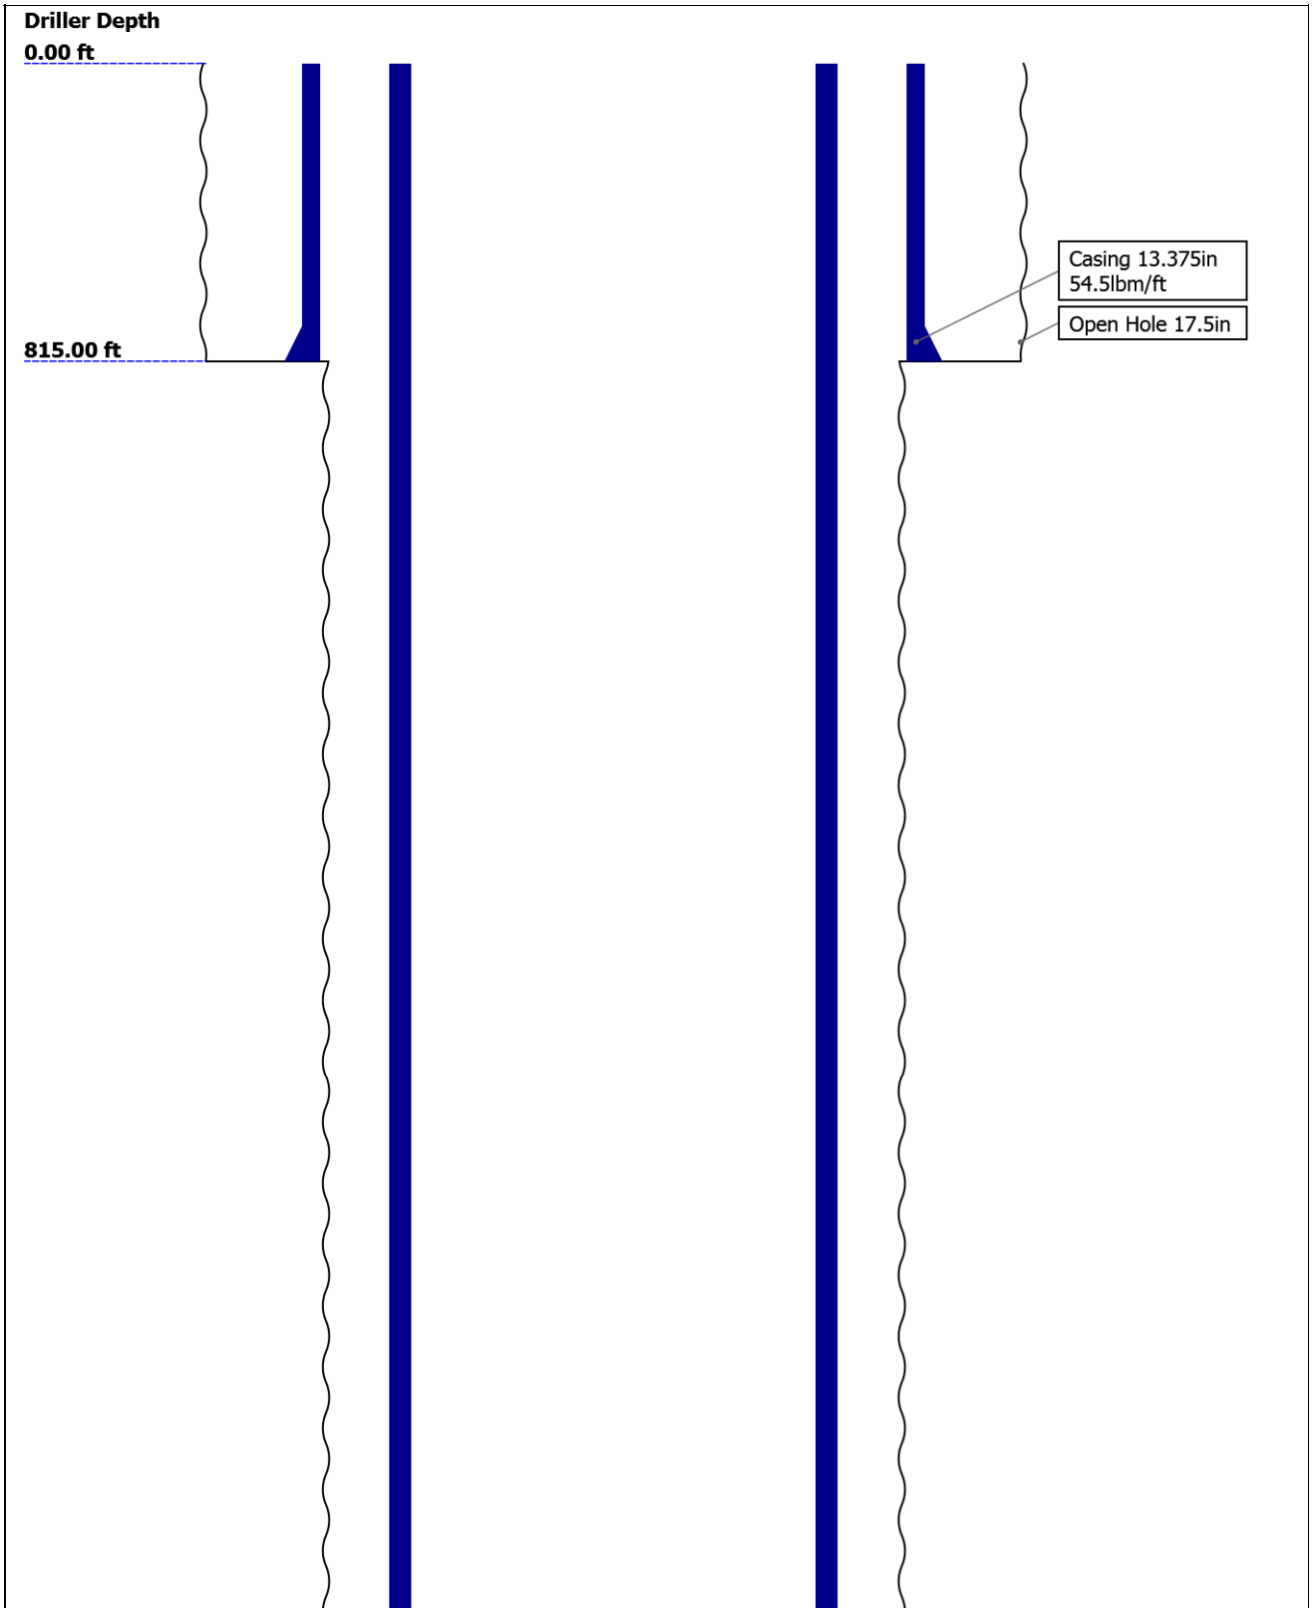

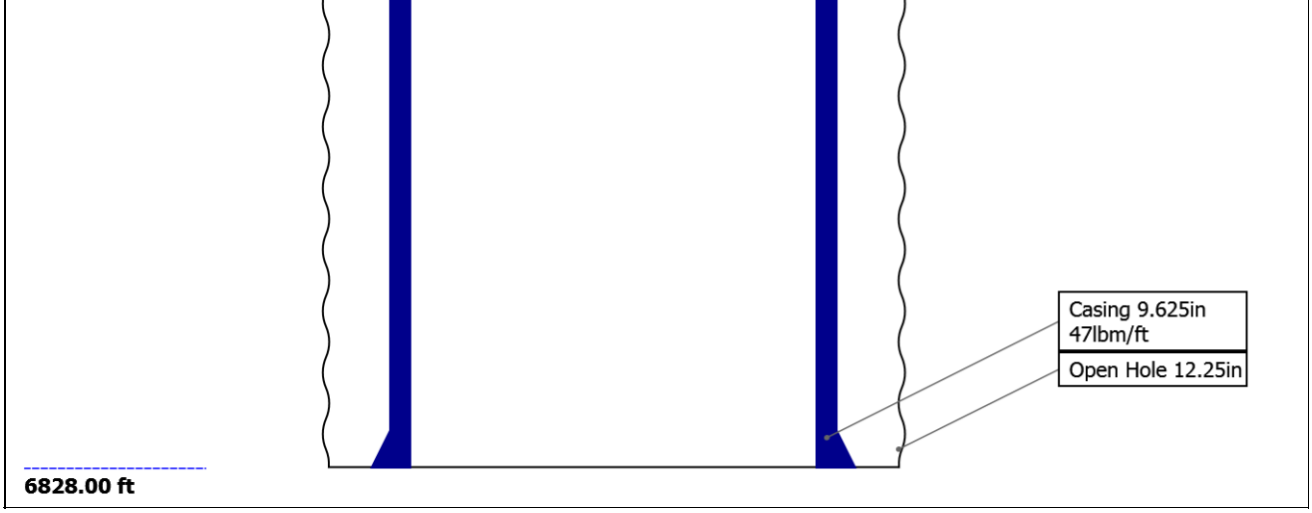

Borehole Size/Casing/Tubing Record

Bit						
Bit Size (in)	17.5	12.25				
Top Driller (ft)	0	815				
Top Logger (ft)	0	815				
Bottom Driller (ft)	815	6828				
Bottom Logger (ft)	815	6828				
Casing						
Size (in)	13.375	9.625				
Weight (lbm/ft)	54.5	47				
Inner Diameter (in)	12.615	8.681				
Grade	K55	J55				
Top Driller (ft)	0	0				
Top Logger (ft)	0	0				
Bottom Driller (ft)	815	6828				
Bottom Logger (ft)	815	6828				

Remarks and Equipment Summary

28Jun2016: Toolstring

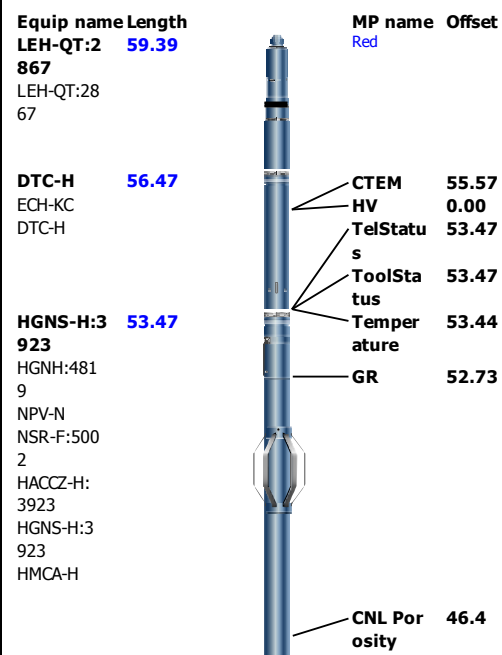

28Jun2016: Remarks

Toolstring ran as per toolsketch.
Two centralizers on USIS and two CME-Y used to centralize ultrasonic tool.
Thank you for choosing Schlumberger!
Correlated to Schlumberger Dual Induction - SFL- GR dated Sept 17,1993
Tool ran per toolsketch, Anomolies repeated in Very Hi-Res
Rig Ensign 331, Crew: Martinez, Coupart
Plug set at 6703 ft, TD 6693 ft, tagged 6692 ft
Logging objective Corrosion and Cement
USIT logged at 10 Deg 1.5inch, Logging speed 2800 fph, hi-res 10 deg 0.6 inch 1200 fph
Logged from 6692 to the well head at 24 ft
Two centralizers on USIS and Two CME-Y used to centralize USIT tool

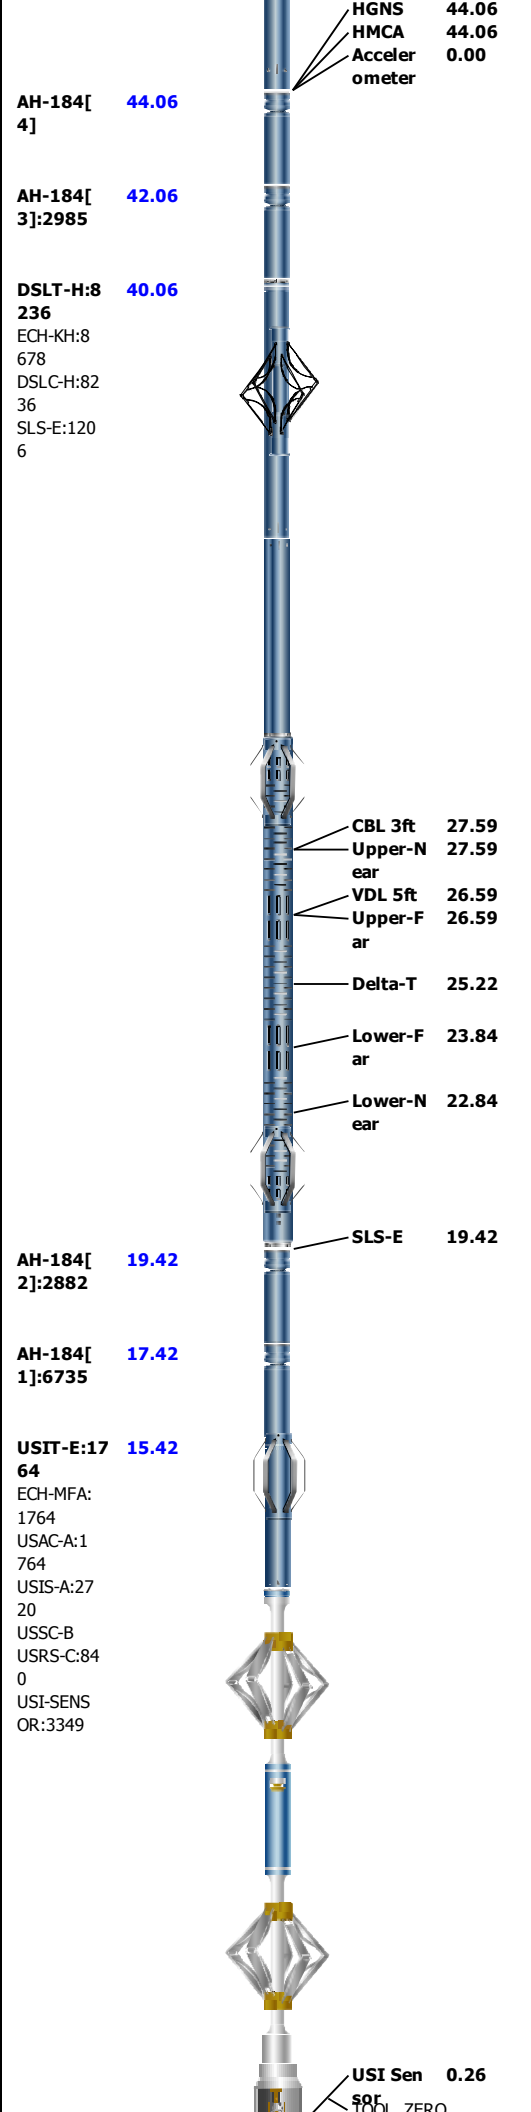
HGNS 44.06
HMCA 44.06
Acceler ometer 0.00
AH-184[4] 44.06
AH-184[3]:2985 42.06
DSLT-H:8236 40.06
ECH-KH:8678
DSLC-H:8236
SLS-E:1206
CBL 3ft 27.59
Upper-Near 27.59
VDL 5ft 26.59
Upper-Far 26.59
Delta-T 25.22
Lower-Far 23.84
Lower-Near 22.84
SLS-E 19.42
AH-184[2]:2882 19.42
AH-184[1]:6735 17.42
USIT-E:1764 15.42
ECH-MFA:1764
USAC-A:1764
USIS-A:2720
USSC-B
USRS-C:840
USI-SENSOR:3349
USI Sensor 0.26
TOOL ZERO

Lengths are in ft
Maximum Outer Diameter = 6.690 in
Line: Sensor Location, Value: Gating Offset
All measurements are relative to TOOL_ZERO

Job Event Summary

Event	Time	Duration	Interval	Remark
Log[2]:Down	Jun-28-2016 07:21	01:10:26	240.76 - 6699.07 ft	fpm
Log[3]:Up	Jun-28-2016 08:34	03:42:58	6692.79 - 90.4 ft	Main
Log[4]:Up	Jun-28-2016 11:57	00:16:47	6695.08 - 6444.87 ft	Hi res
Log[5]:Up	Jun-28-2016 12:19	00:11:42	5871.94 - 5687.24 ft	Hi res
Log[6]:Up	Jun-28-2016 13:06	00:10:00	1039.04 - 884.35 ft	Hi res
Log[7]:Up	Jun-28-2016 13:20	00:18:41	330.21 - 23.45 ft	Surface Pass 1
Log[1]:Up	Jun-28-2016 14:00	00:09:41	250.82 - 20.86 ft	surface repeat

USIT - Fluid Properties Measurement

Run Name	Pass Name	Start Depth(ft)	Stop Depth(ft)
Run 1	Log[3]:Up	6692.79	90.40

Fluid Velocity = "Automatic".
CFVL equals DFSL channel

Start Depth(ft)	Stop Depth(ft)	Start Value(us/ft)	End Value(us/ft)

Mud Impedance = "FreePipe Norm.".
Free Pipe normalization zone is : 122.46m(401.77ft) to 130.53m(428.23ft)
MUD_N_FRP = 1.12
DFD = 1.03g/cm3(8.60lbm/gal)
CZMD median computed in free pipe normalization interval = 1.73 MRayl

Start Depth(ft)	Stop Depth(ft)	Start Value(Mrayl)	End Value(Mrayl)

Composite 1

Main Pass 5 in = 100 ft

Software Version

Acquisition System	Version
Maxwell 2016 SP1	6.1.58882.3100

Computation	Description	Version
CEVAL	Sonic Cement Evaluation Computation Ensemble provides common Parameters and Channels	6.1.58882.3100
Cementation	Cementation Computation Application	6.1.58882.3100

SoftwareVersion_Tool	SoftwareVersion_Run Version	SoftwareVersion_Build Version
WAFE-SEC	Synergy SV451EC version 9.10	Synergy SV451EC version 9.10
WAFE-FEC	Synergy SV451EC version 9.10	Synergy SV451EC version 9.10
WAFE-TMDI	Synergy SV451EC version 46.19	Synergy SV451EC version 46.19

Tool Elements	Description	Software Version	Firmware Version
HGNS-H	HILT Gamma-Ray and Neutron Sonde, 150 degC	6.1.58882.3100	2.0
SLS-E	Sonic Logging Sonde E supports 3'-5'BHC DT and CBL/VDL	6.1.58882.3100	4.0
USI-SENSOR	USIT Transducer Element	6.1.58882.3100	DSP: v1.82

Composite Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
28Jun2016	Log[3]:Up	Up	90.40 ft	6692.79 ft	28-Jun-2016 8:34:23 AM	28-Jun-2016 11:17:22 AM	ON	0.00 ft	Yes
28Jun2016	Log[7]:Up	Up	23.45 ft	330.21 ft	28-Jun-2016 1:20:55 PM	28-Jun-2016 1:39:36 PM	ON	6.00 ft	Yes

All depths are referenced to toolstring zero

Description: USI VDL Cement Format: Log (LBV1_USI-VDL (DSLT) Cement 9.625inch) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 28-Jun-2016 19:06:50

TIME_1900 - Time Marked every 60.00 (s)

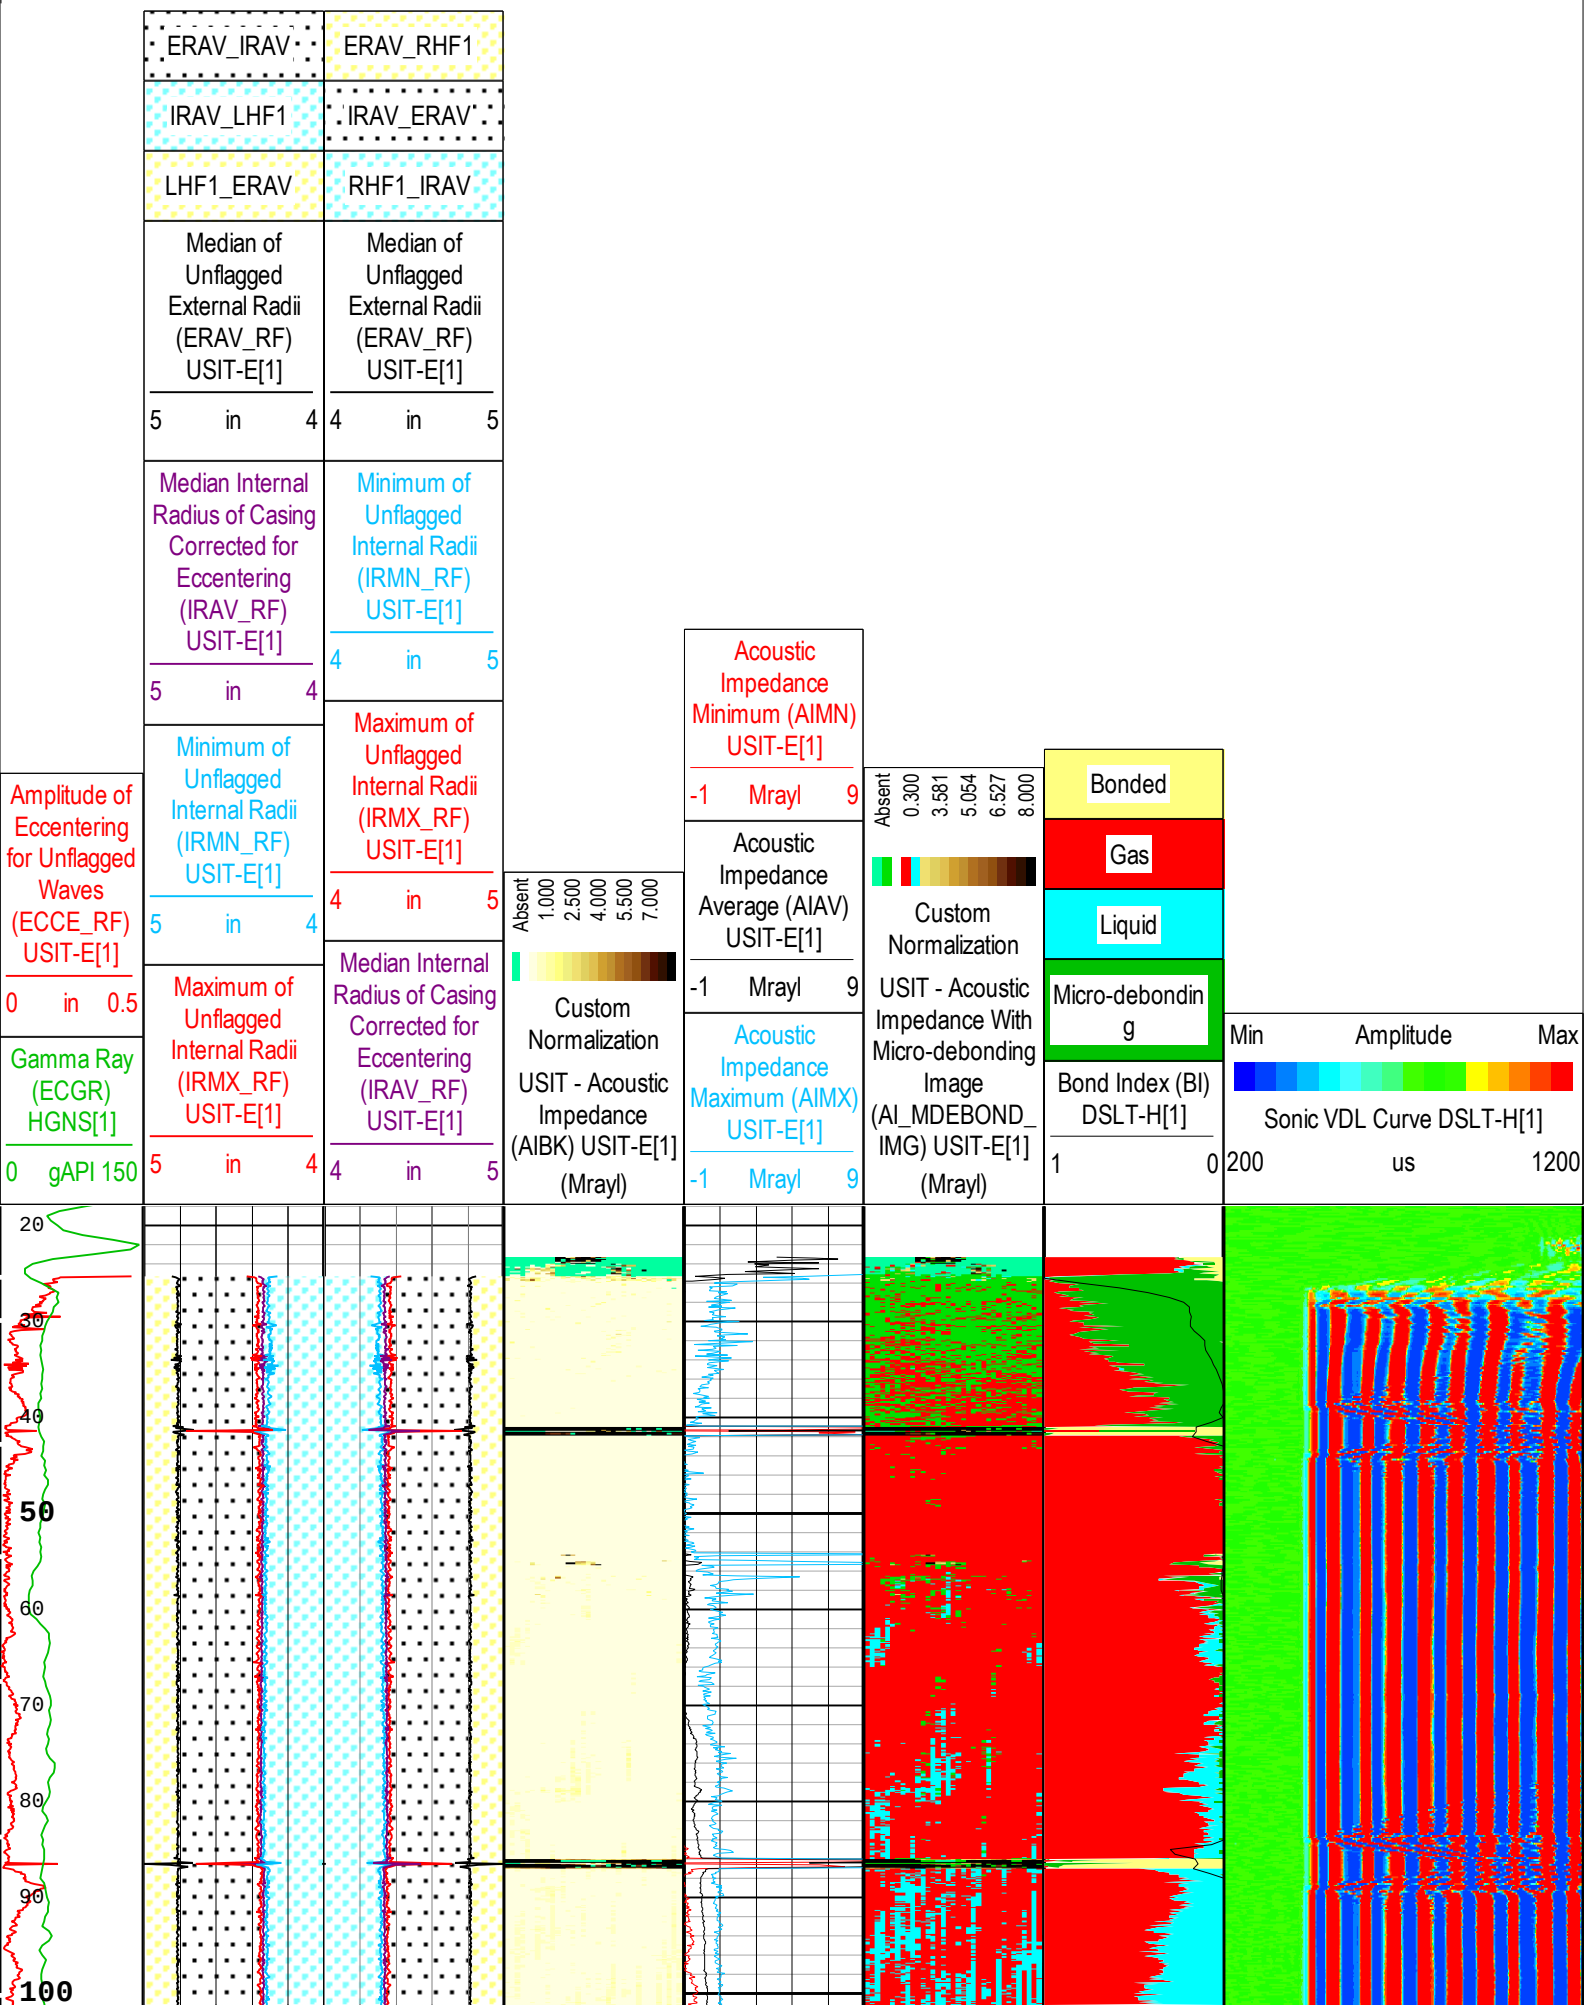

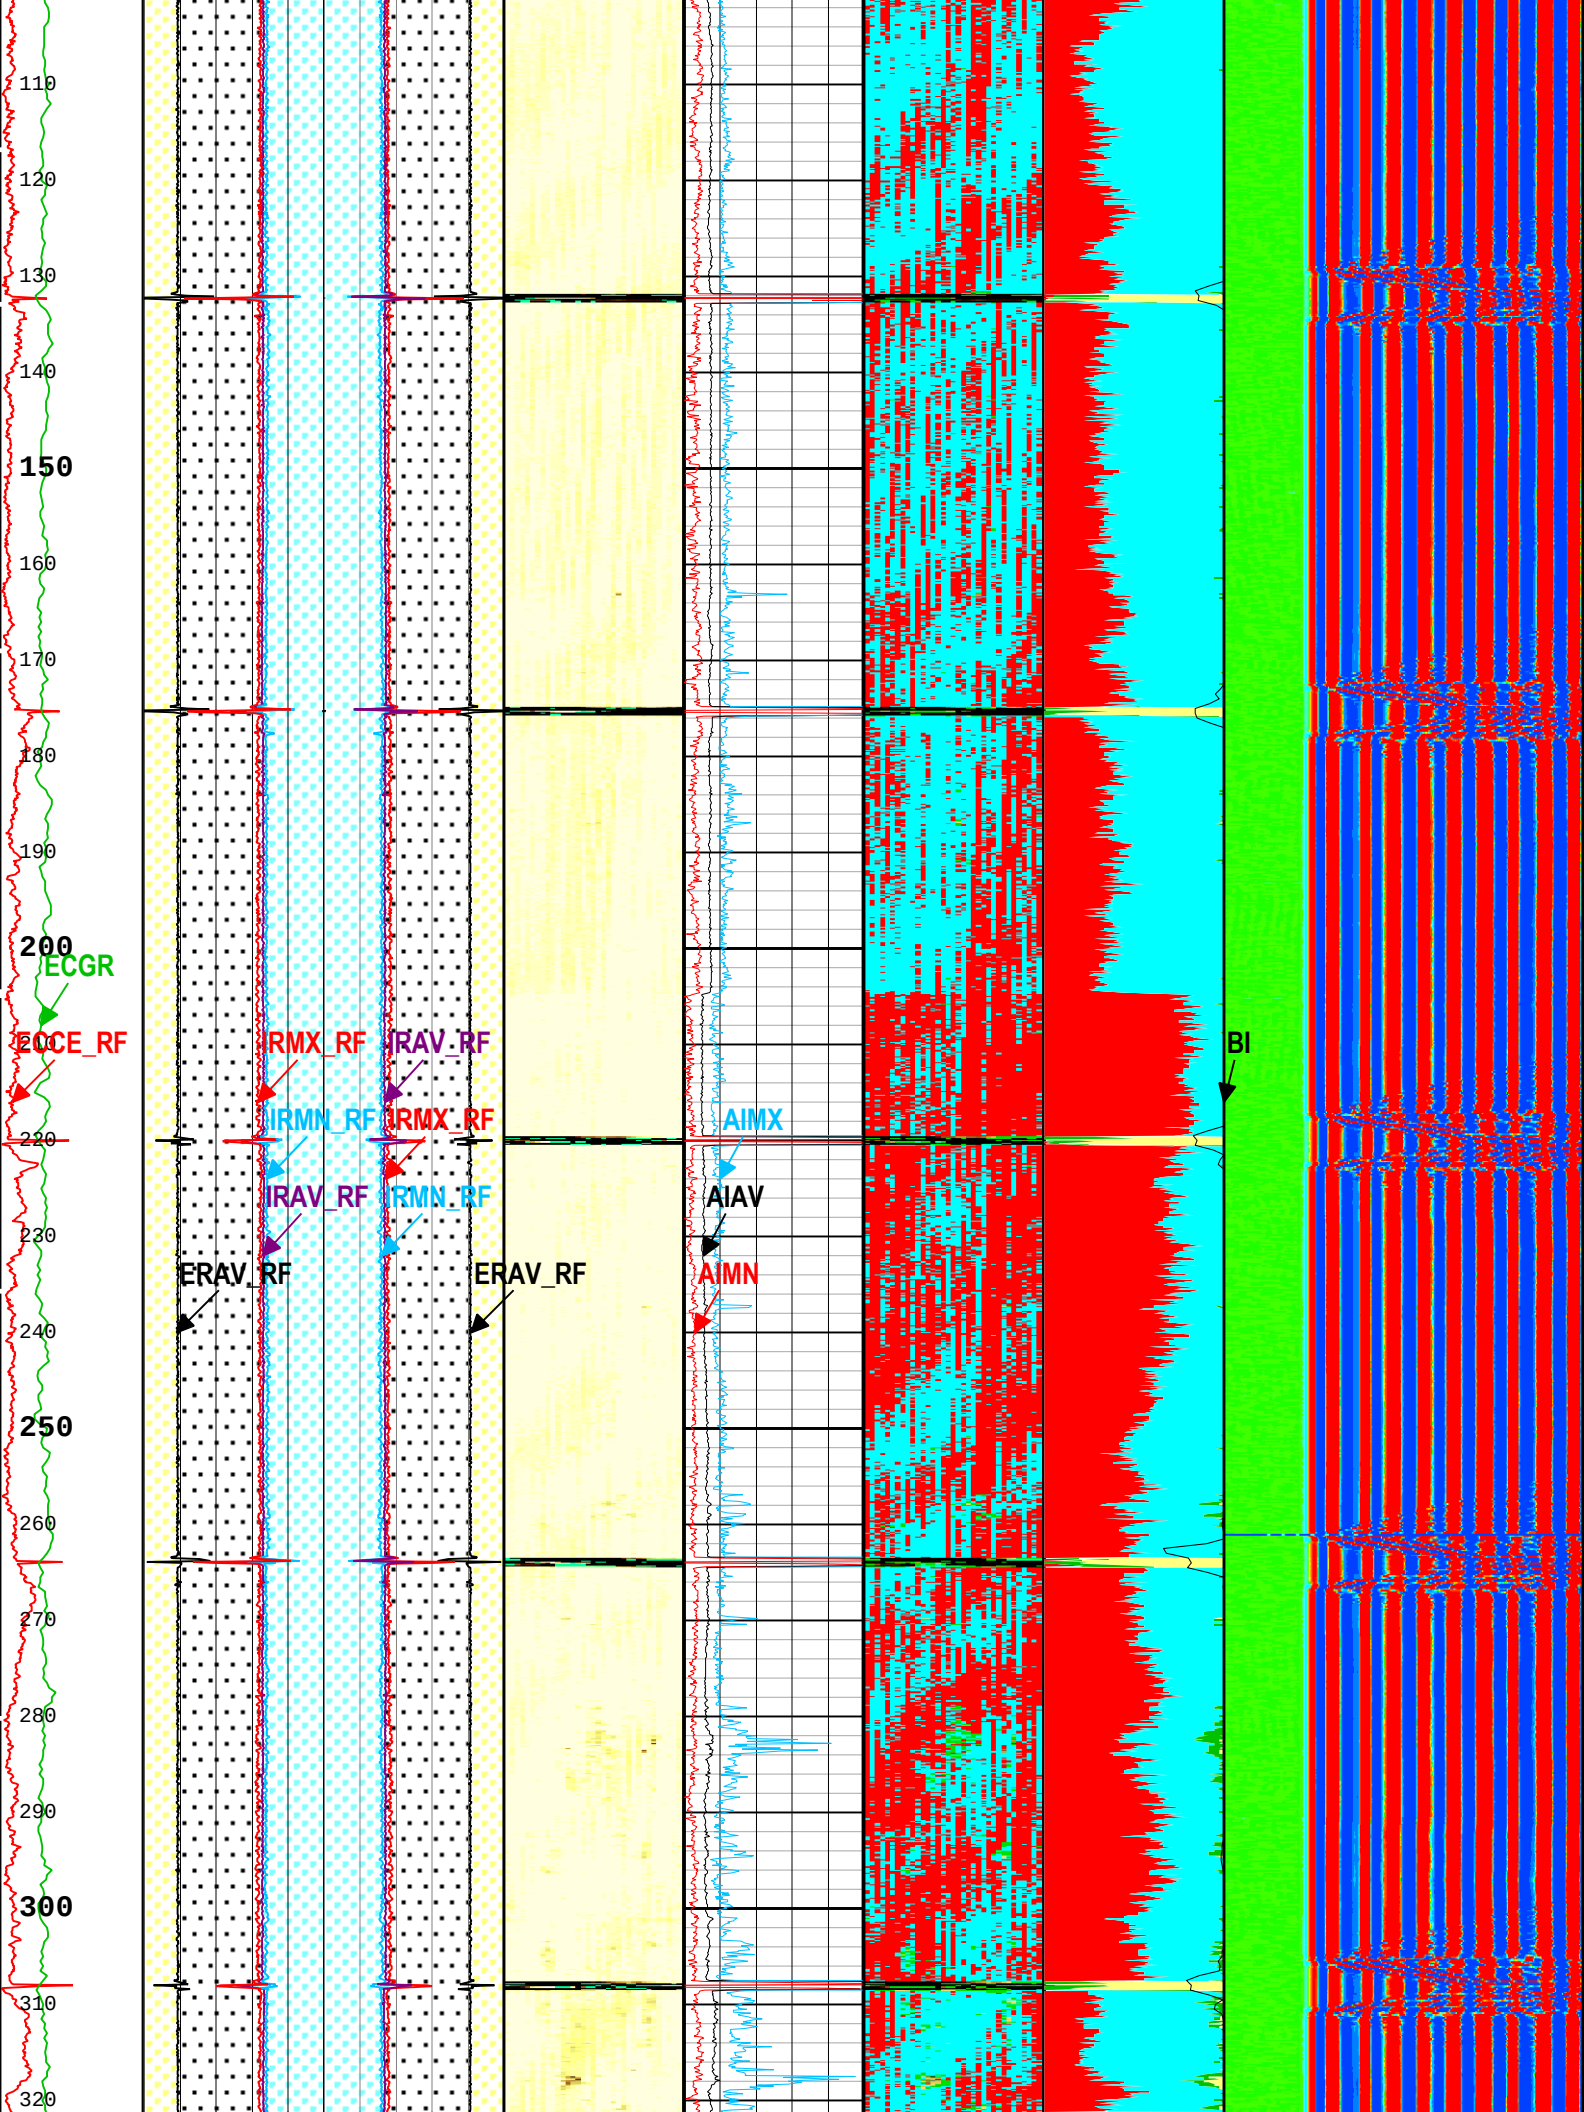
110
120
130
140
150
160
170
180
190
200
210
220
230
240
250
260
270
280
290
300
310
320
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

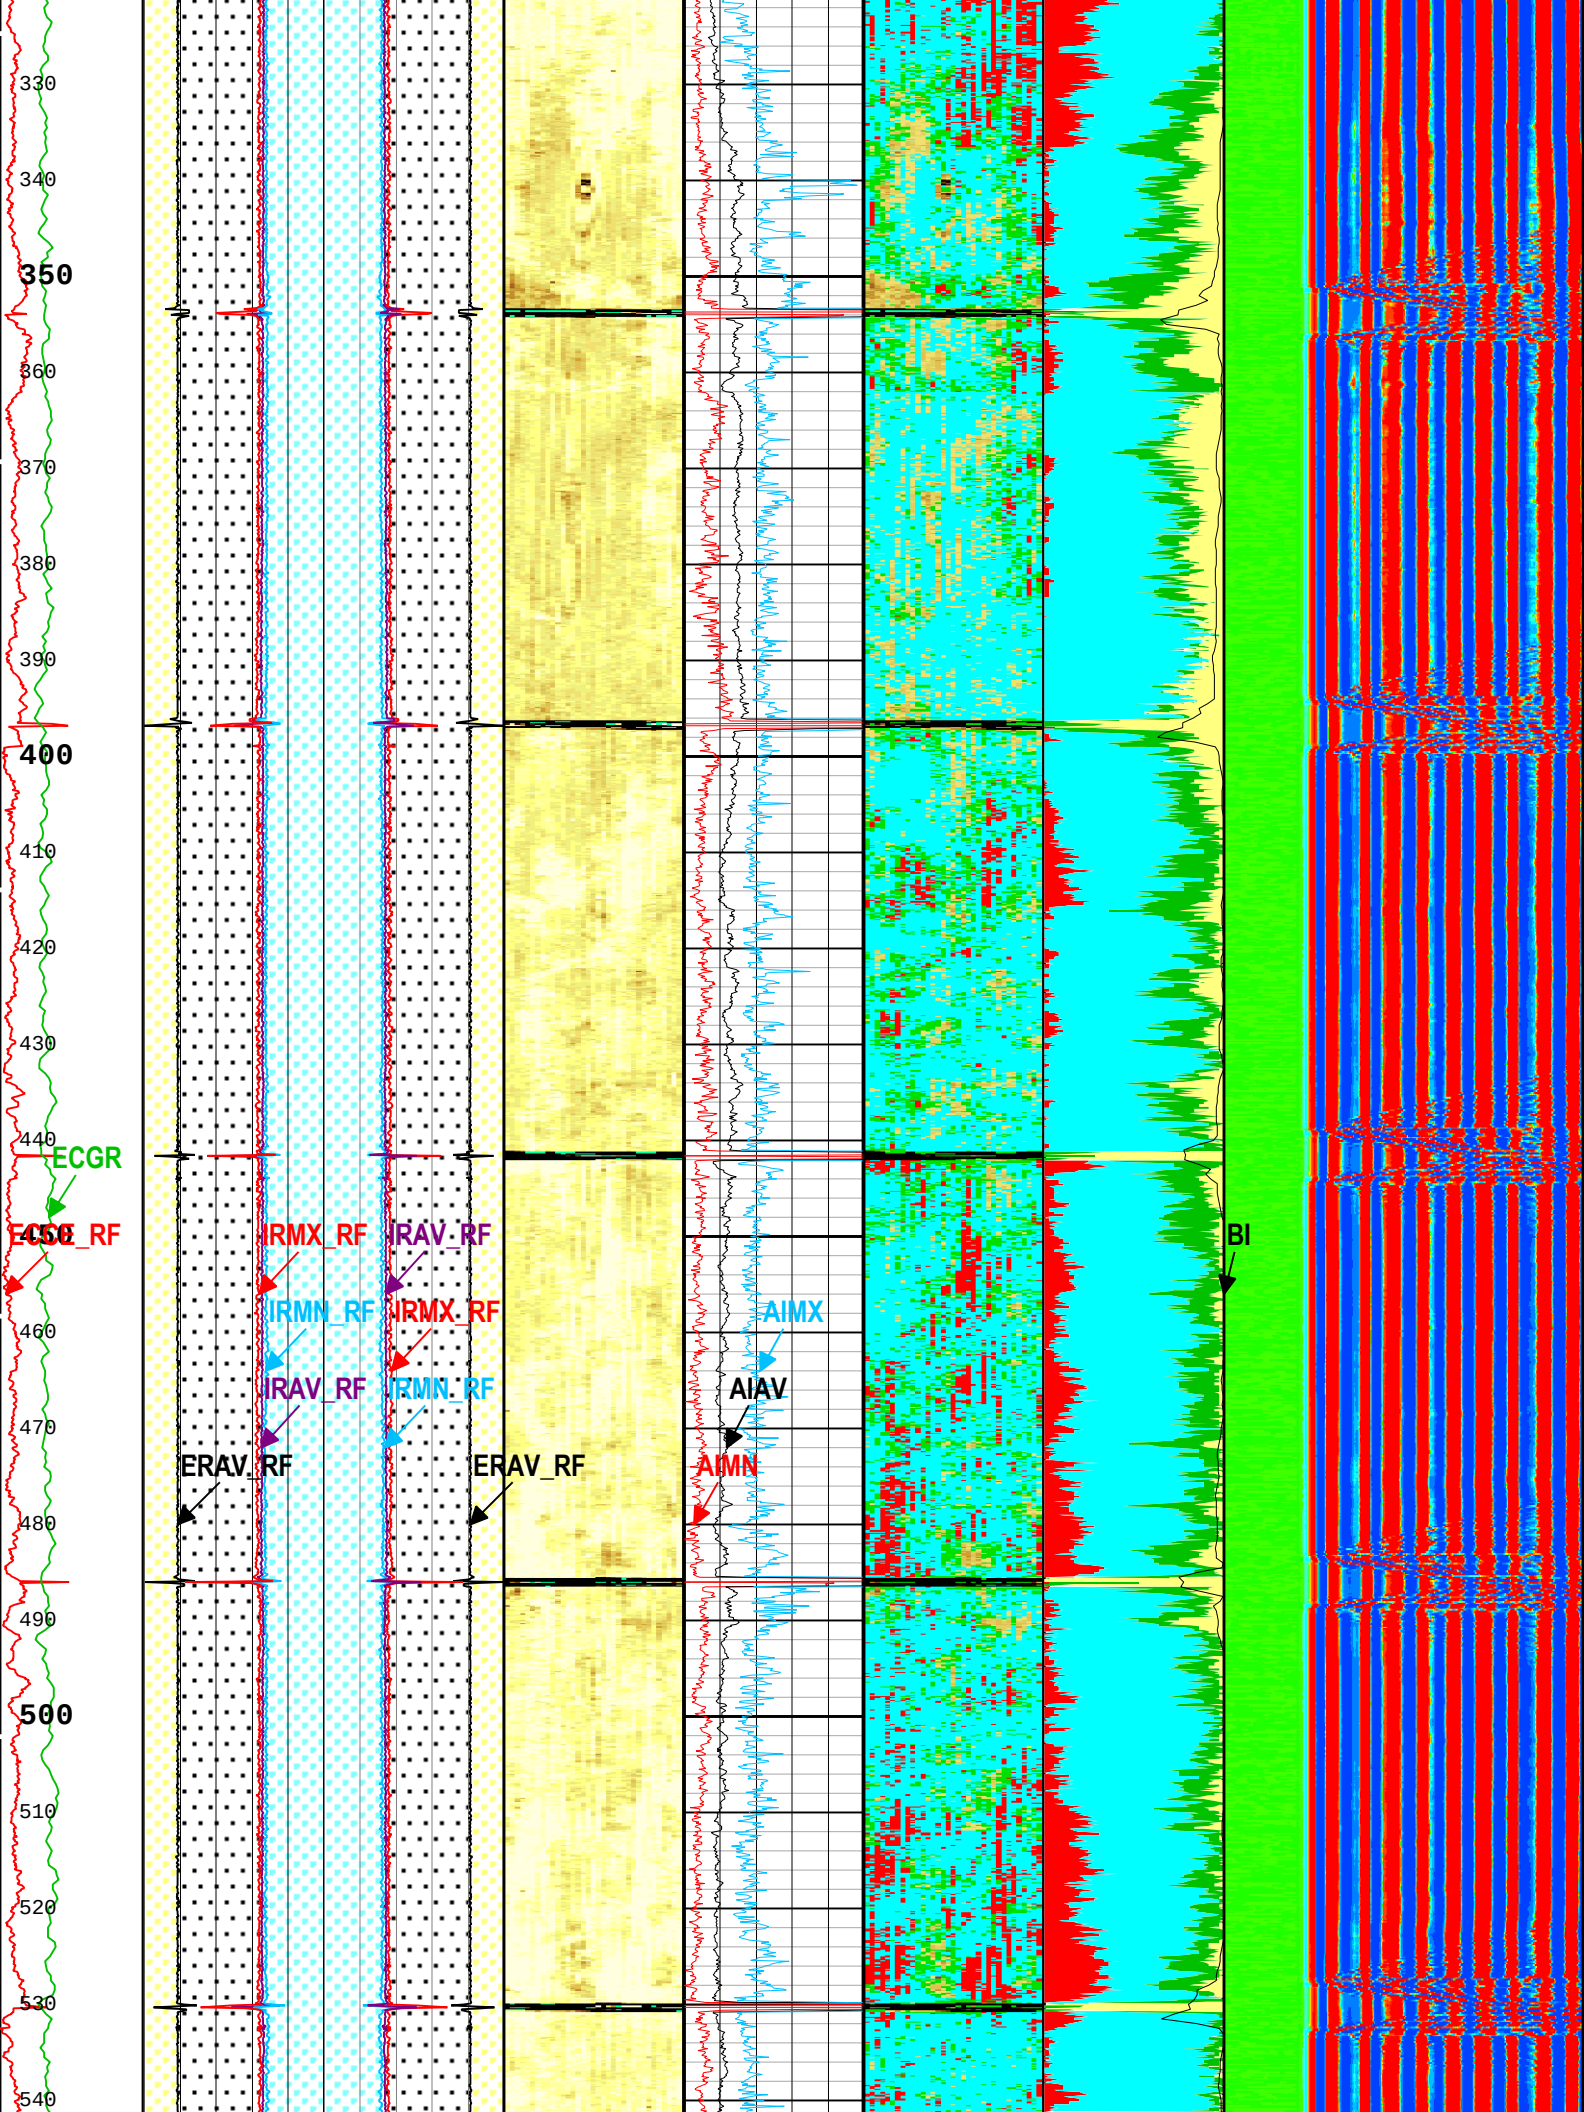
330
340
350
360
370
380
390
400
410
420
430
440
450
460
470
480
490
500
510
520
530
540
ECGR
ECSG_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

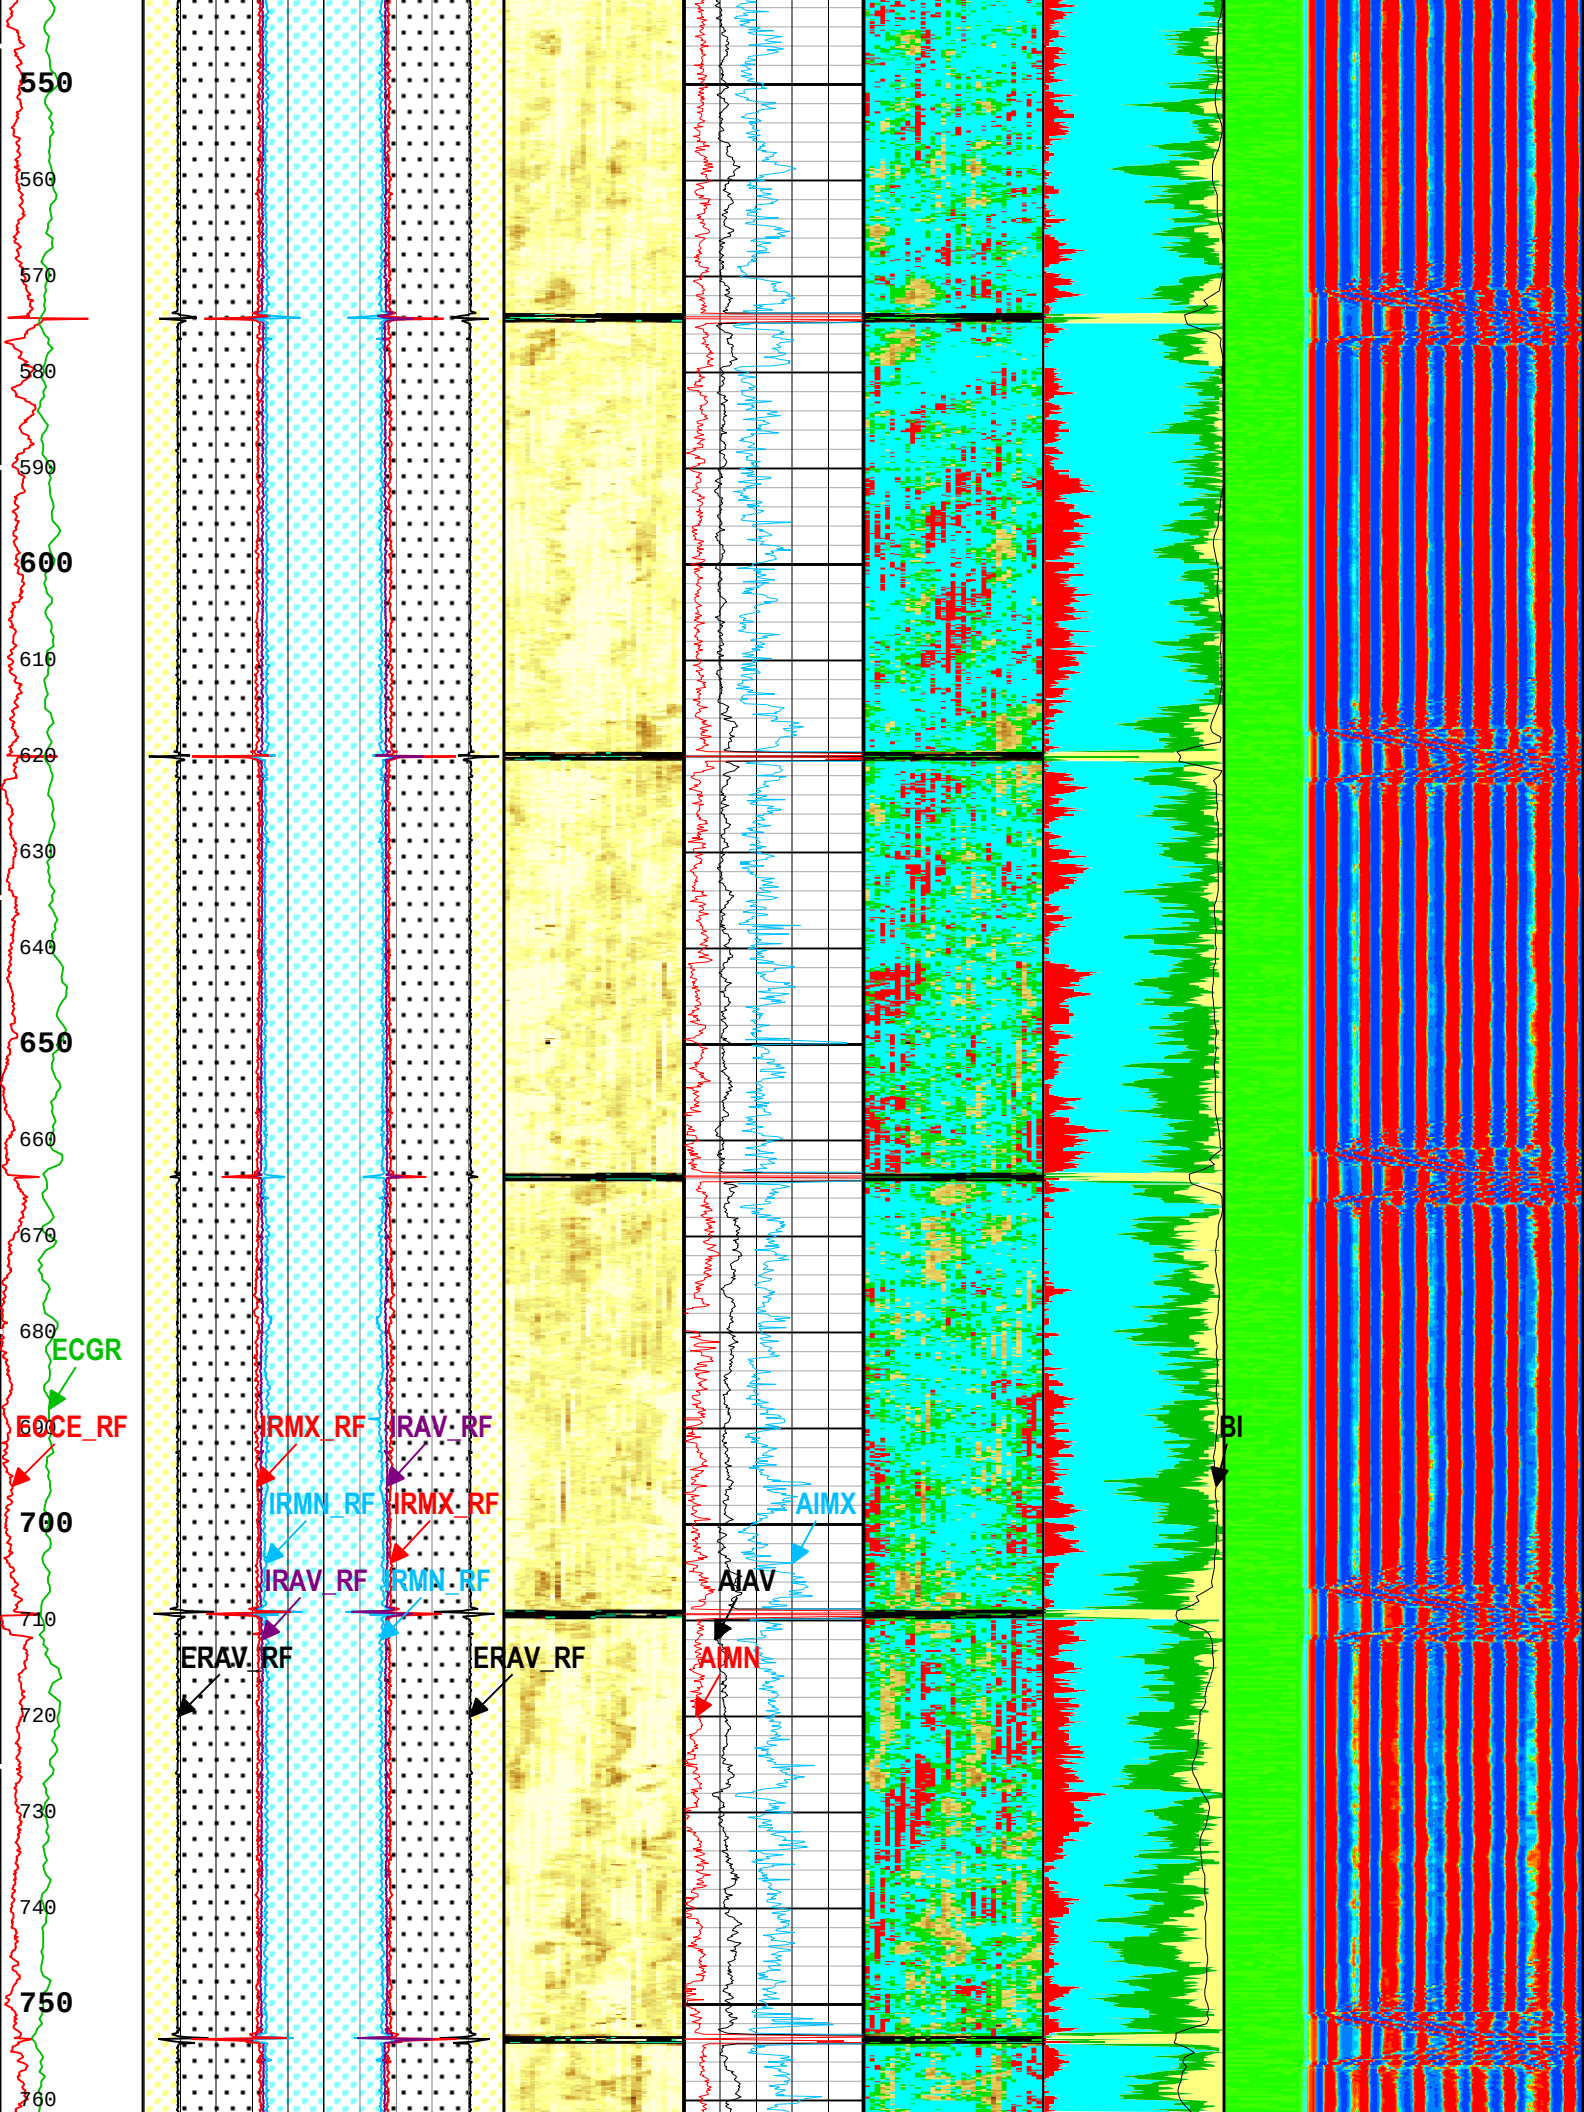
550
560
570
580
590
600
610
620
630
640
650
660
670
680
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
700
IRAV_RF
IRMN_RF
710
ERAV_RF
ERAV_RF
720
730
740
750
760
AIMX
AIAV
AIMN
BI

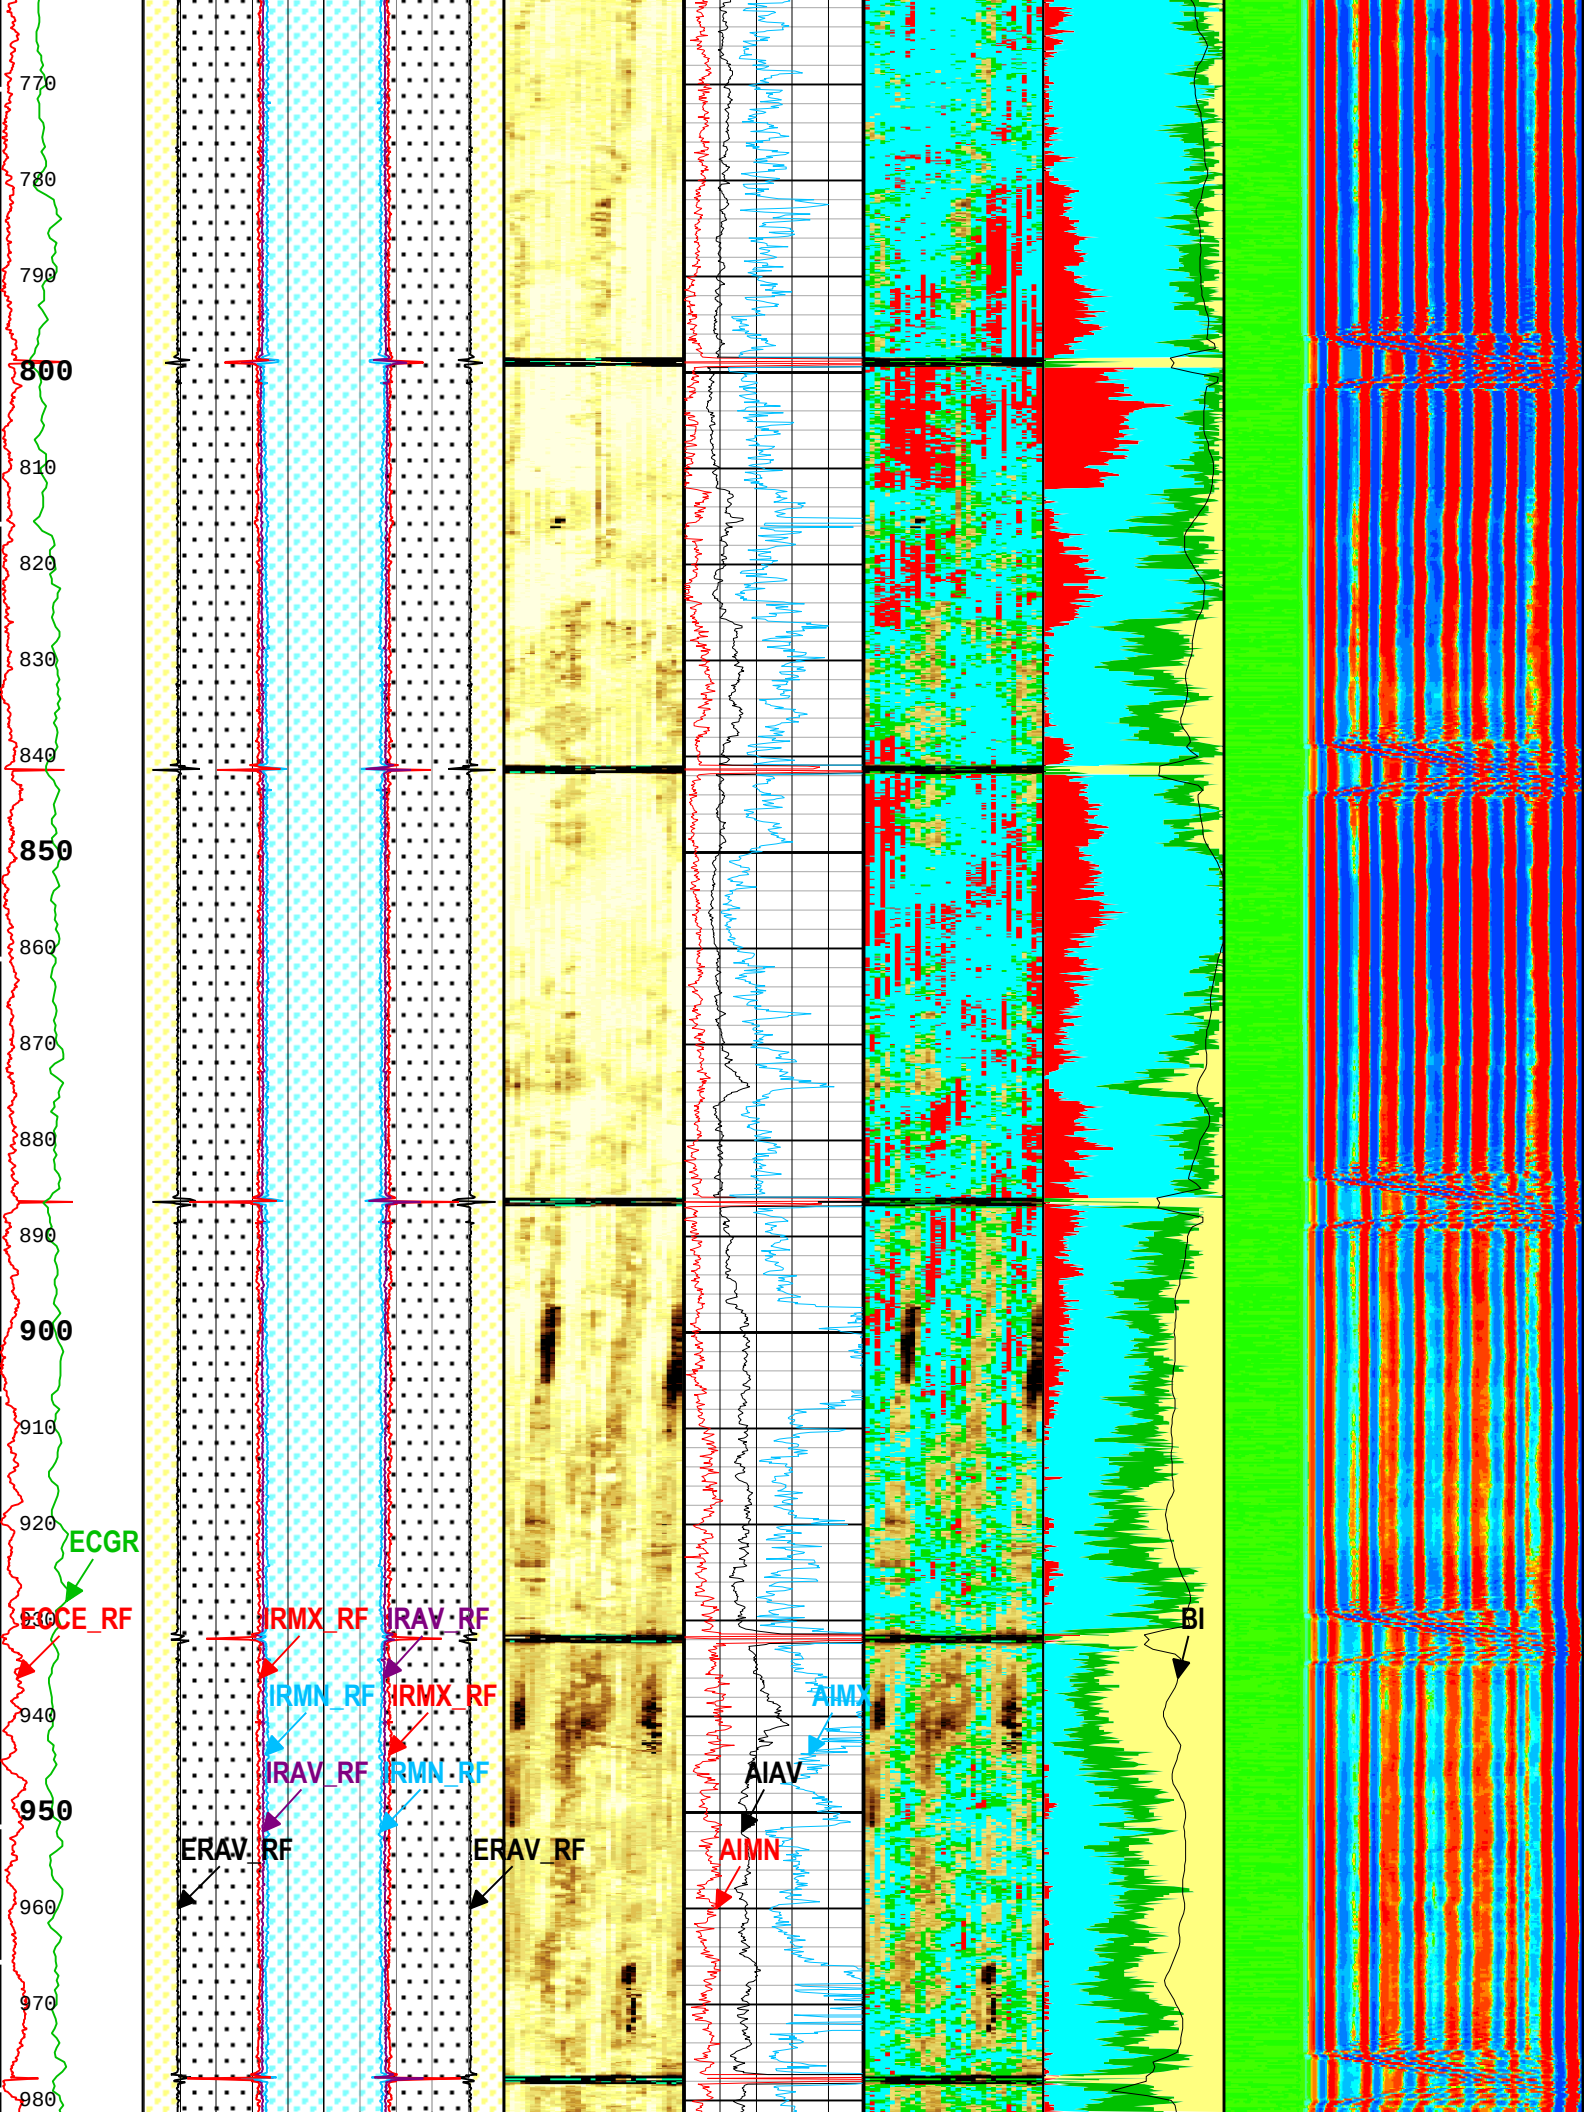
770
780
790
800
810
820
830
840
850
860
870
880
890
900
910
920
930
940
950
960
970
980
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

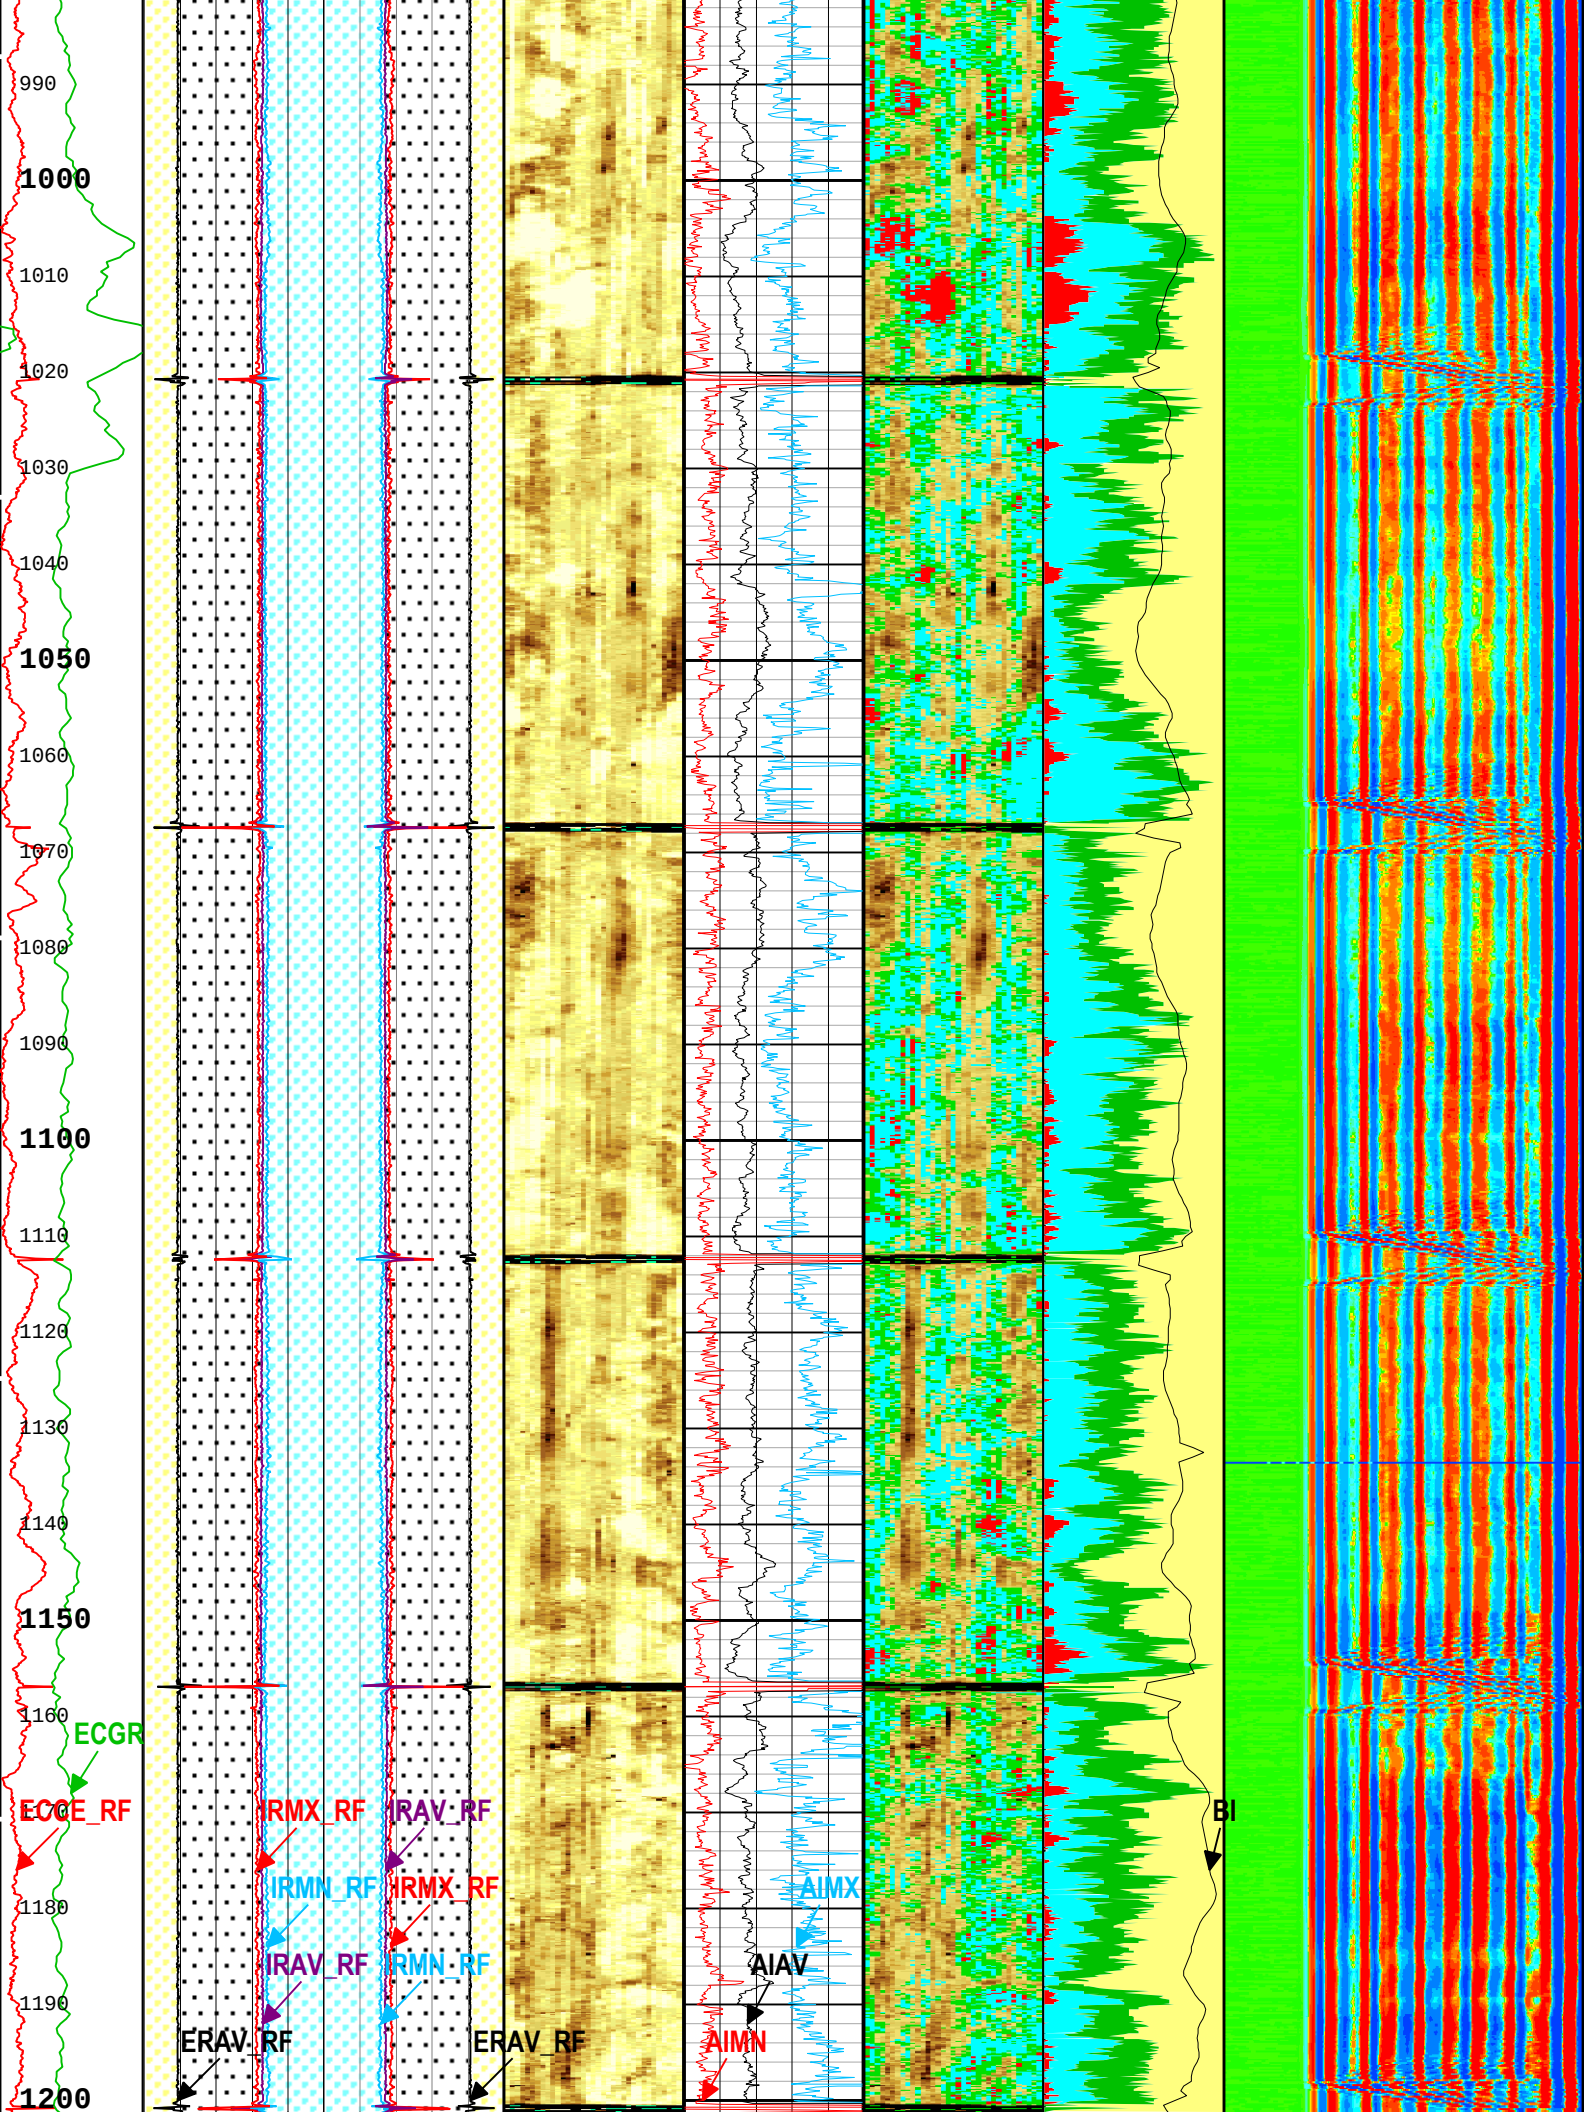
990
1000
1010
1020
1030
1040
1050
1060
1070
1080
1090
1100
1110
1120
1130
1140
1150
1160
1180
1190
1200
ECGR
ECOE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

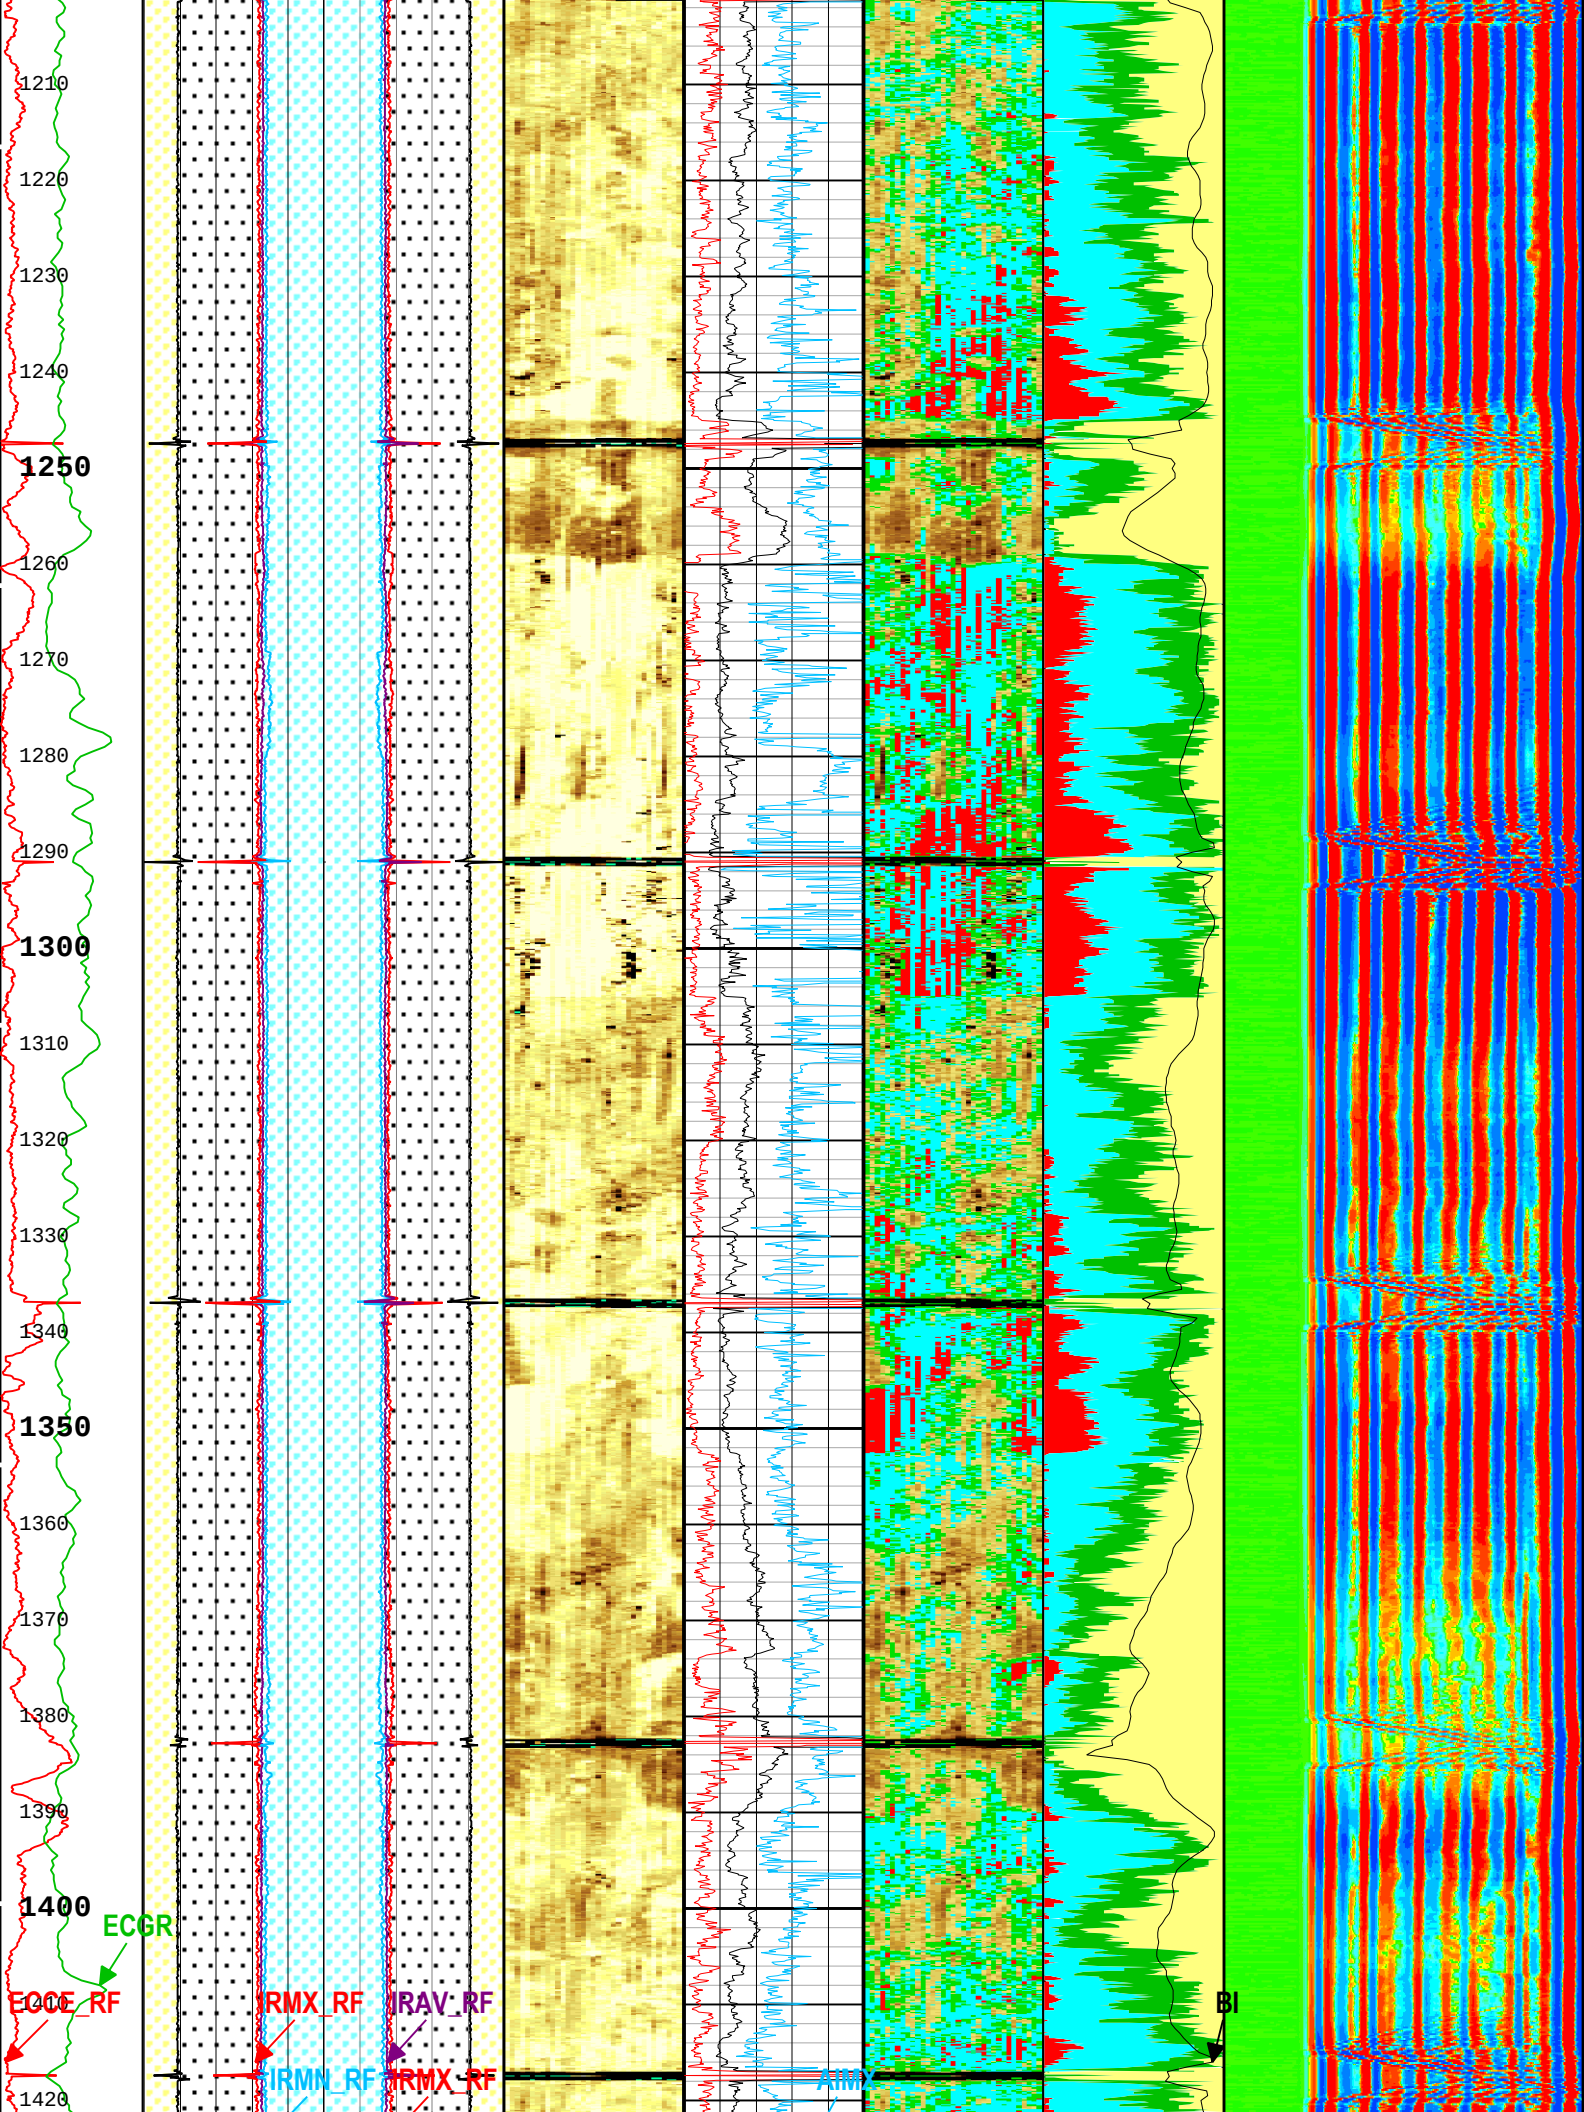
1210
1220
1230
1240
1250
1260
1270
1280
1290
1300
1310
1320
1330
1340
1350
1360
1370
1380
1390
1400
1420
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
BI
AIMX

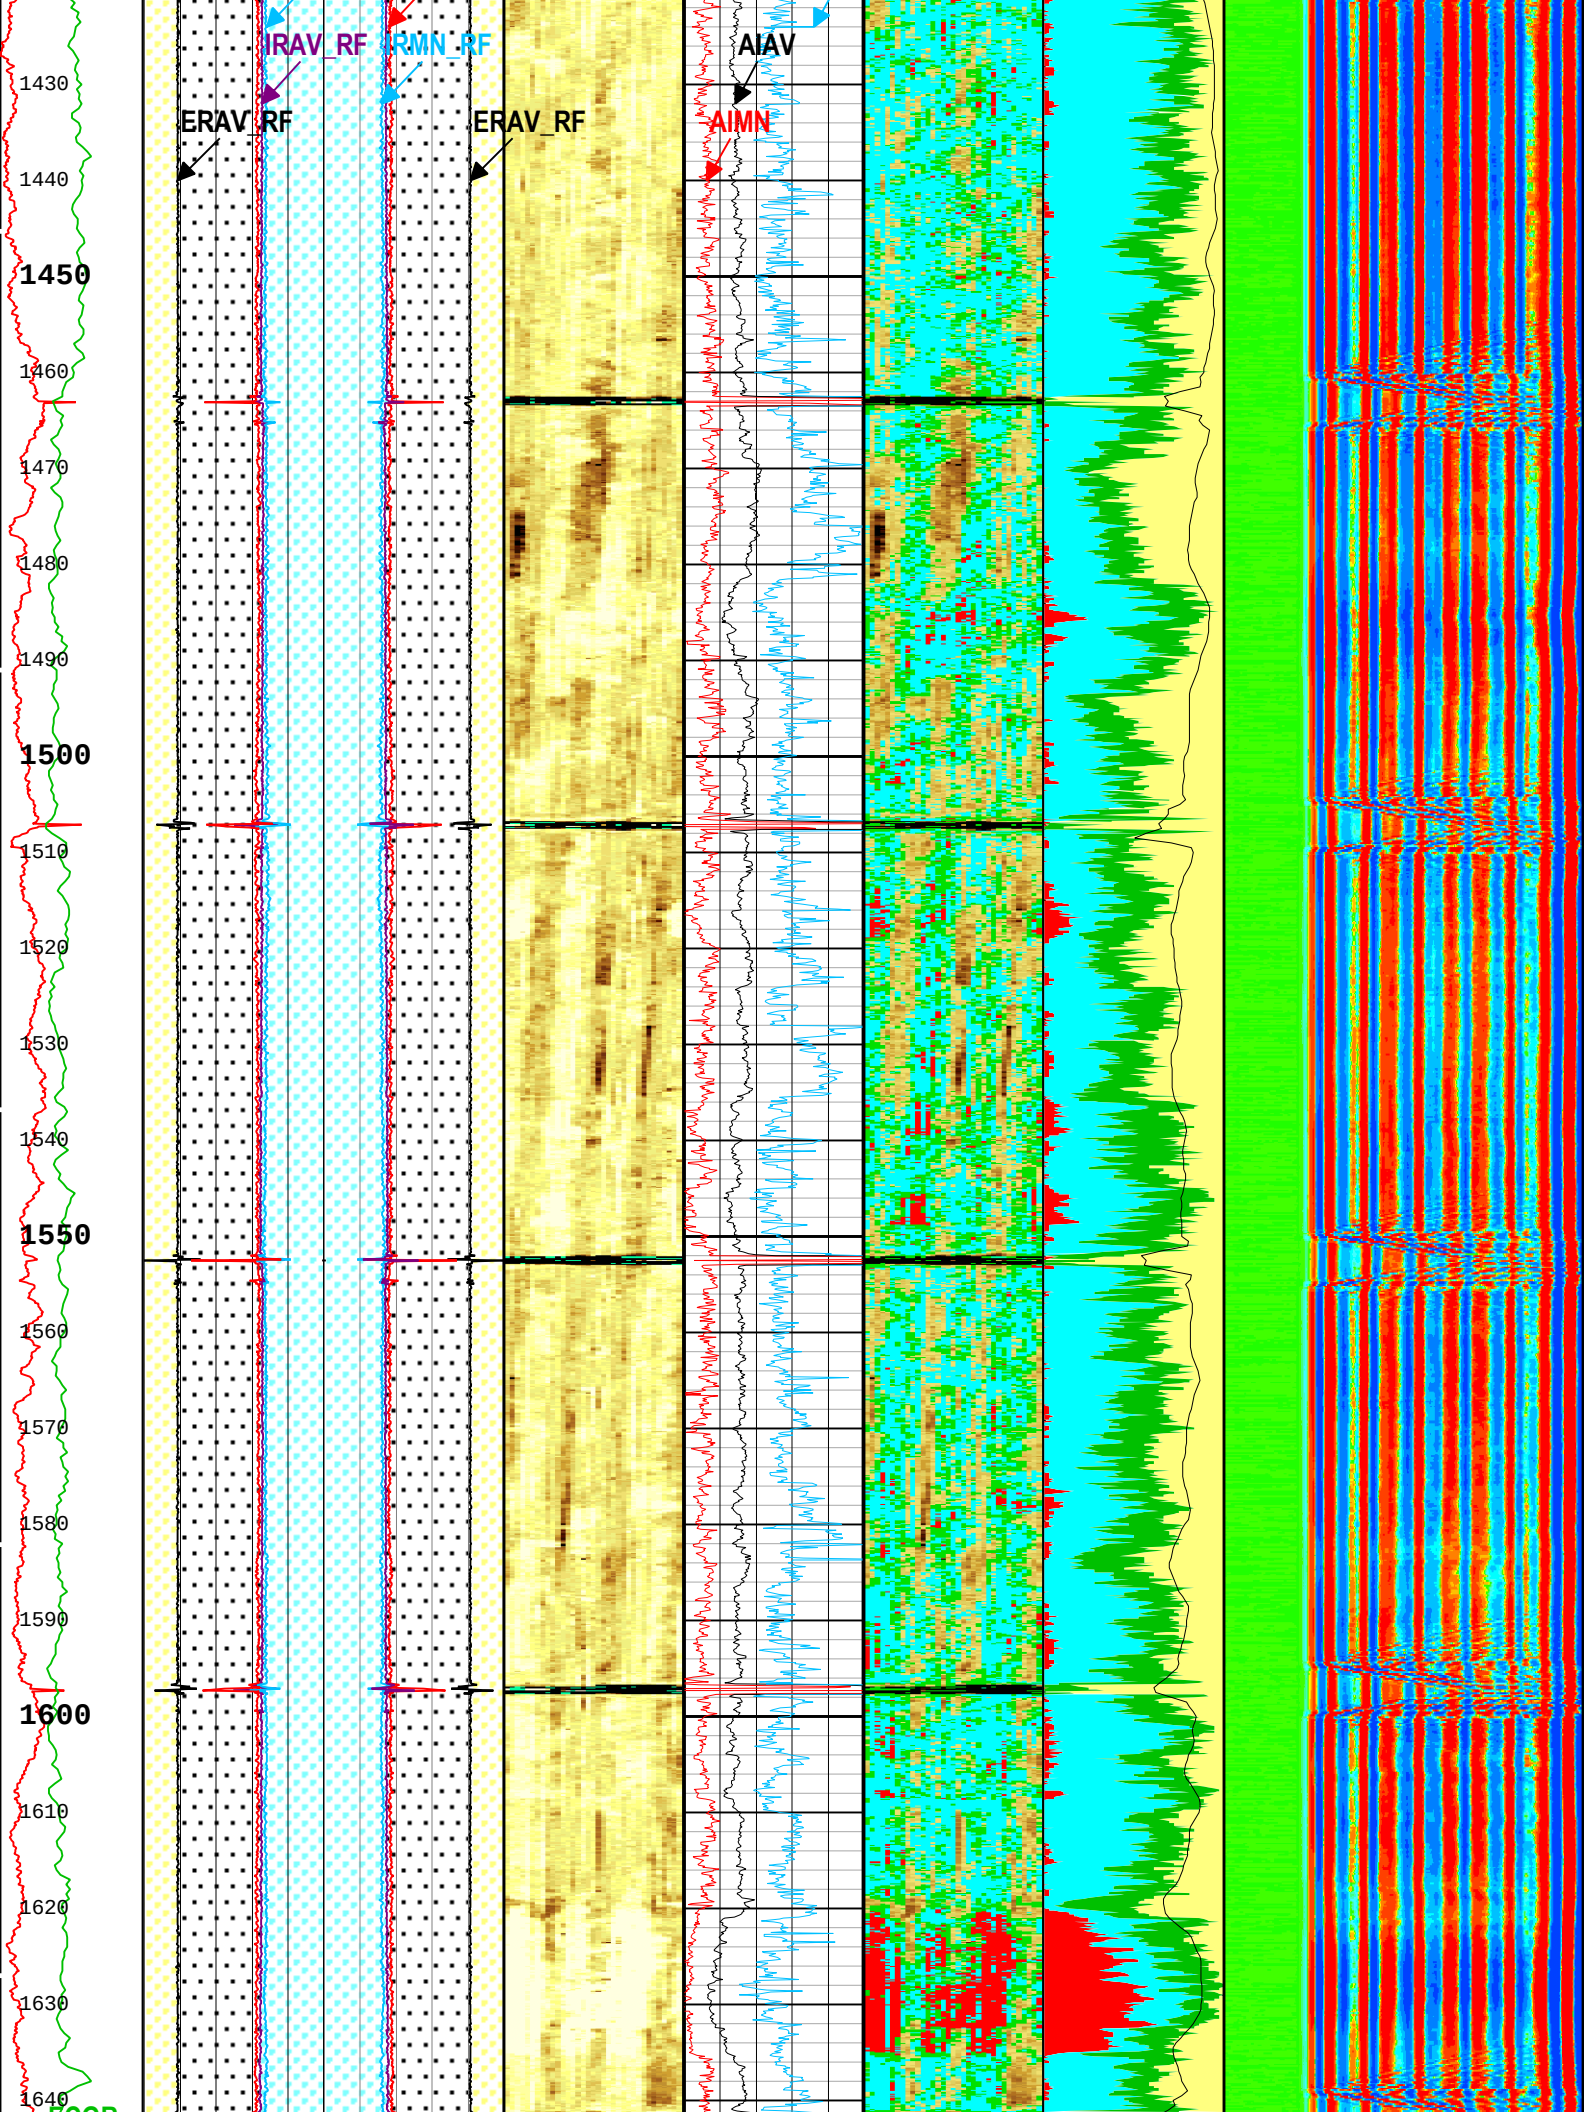
IRAV_RF
IRMN_RF
AIAV
ERAV_RF
ERAV_RF
AIMN
1430
1440
1450
1460
1470
1480
1490
1500
1510
1520
1530
1540
1550
1560
1570
1580
1590
1600
1610
1620
1630
1640

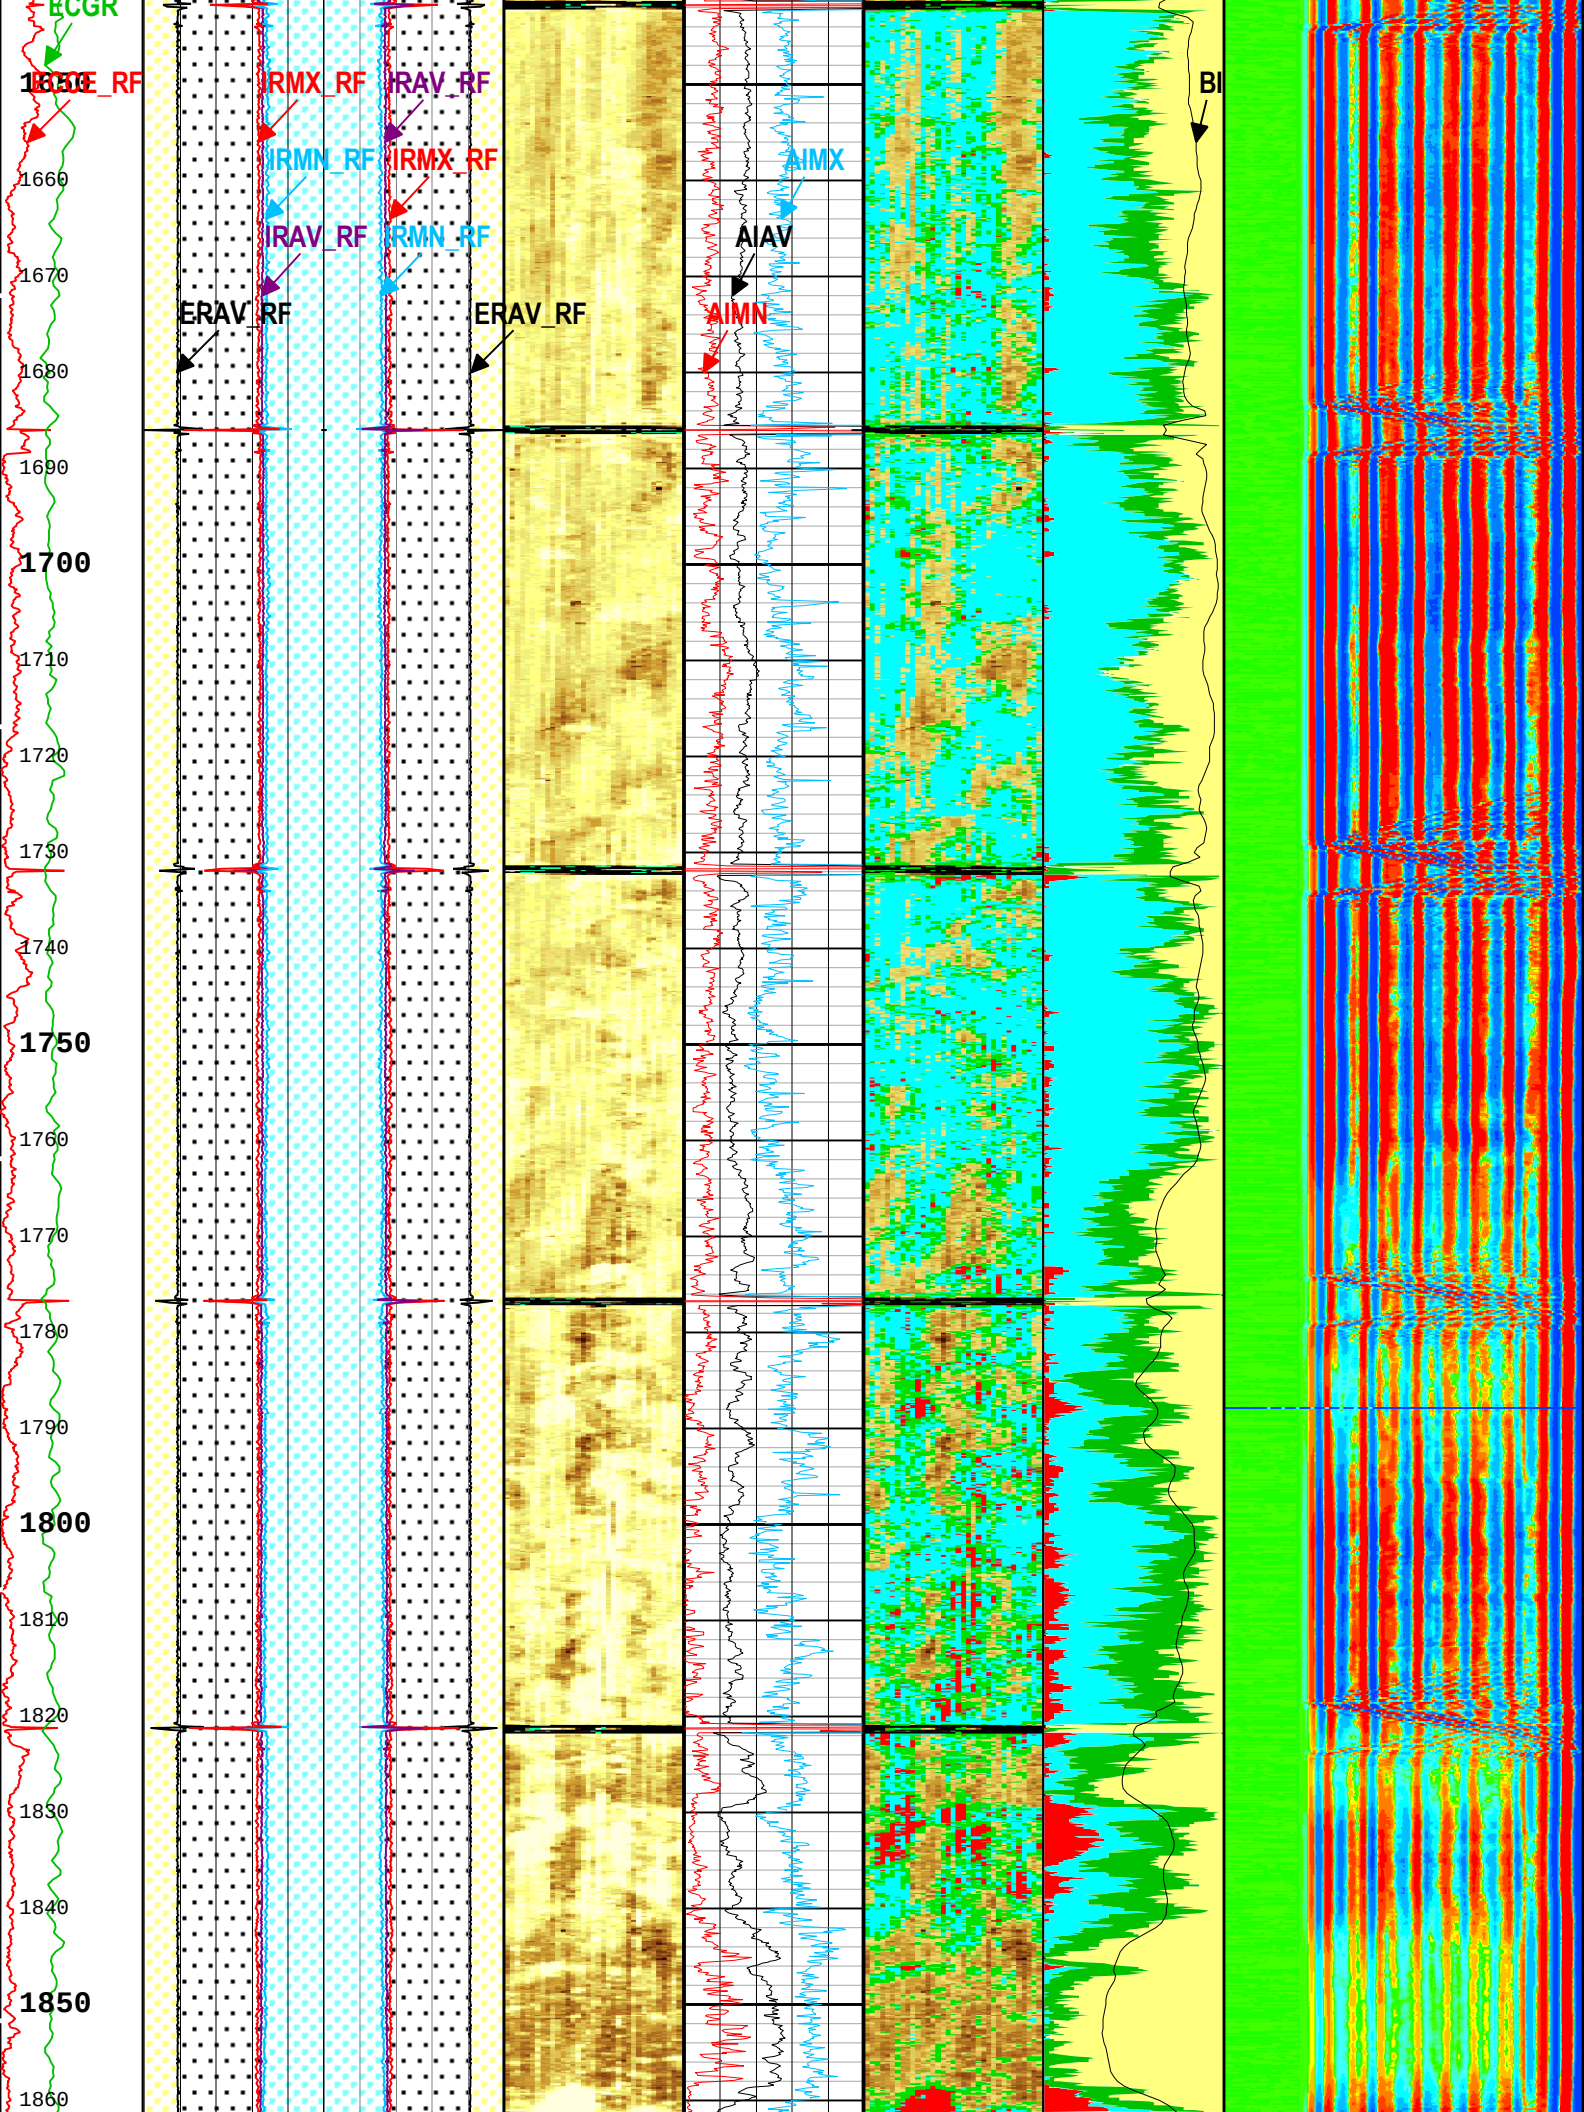
ECGR
ERMX_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI
1650
1660
1670
1680
1690
1700
1710
1720
1730
1740
1750
1760
1770
1780
1790
1800
1810
1820
1830
1840
1850
1860

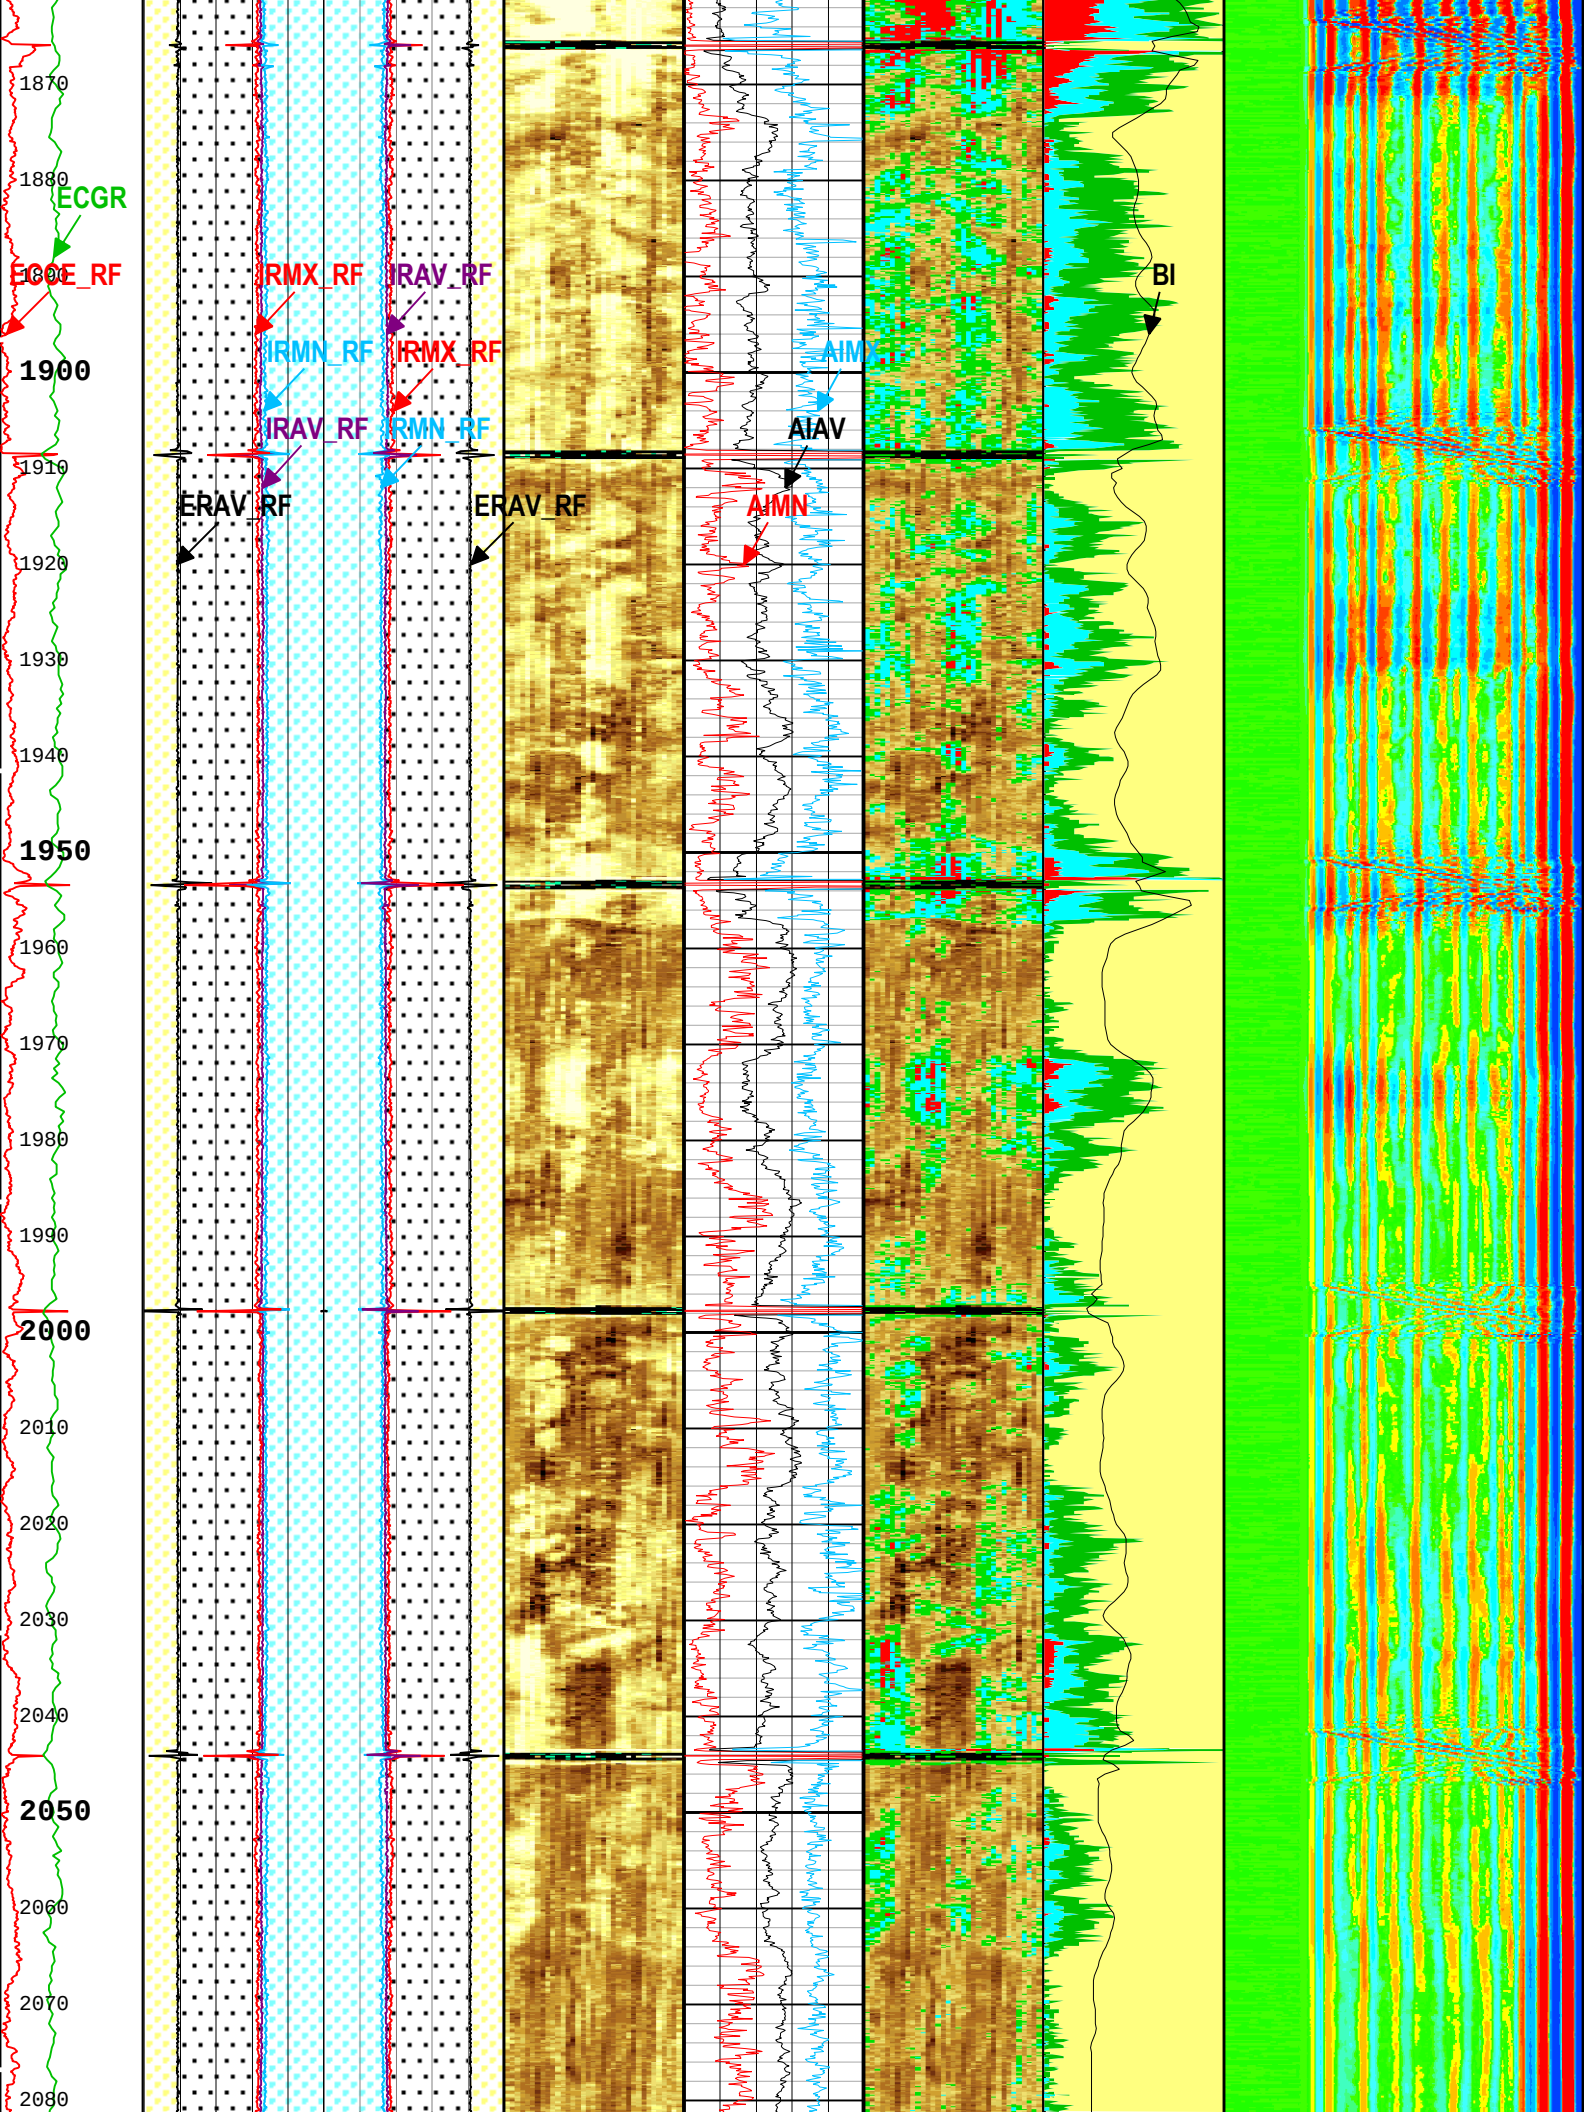
1870
1880
ECGR
ECGE_RF
IRMX_RF
IRAV_RF
BI
1900
IRMN_RF
IRMX_RF
AIMX
IRAV_RF
IRMN_RF
AIAV
1910
ERAV_RF
ERAV_RF
AIMN
1920
1930
1940
1950
1960
1970
1980
1990
2000
2010
2020
2030
2040
2050
2060
2070
2080

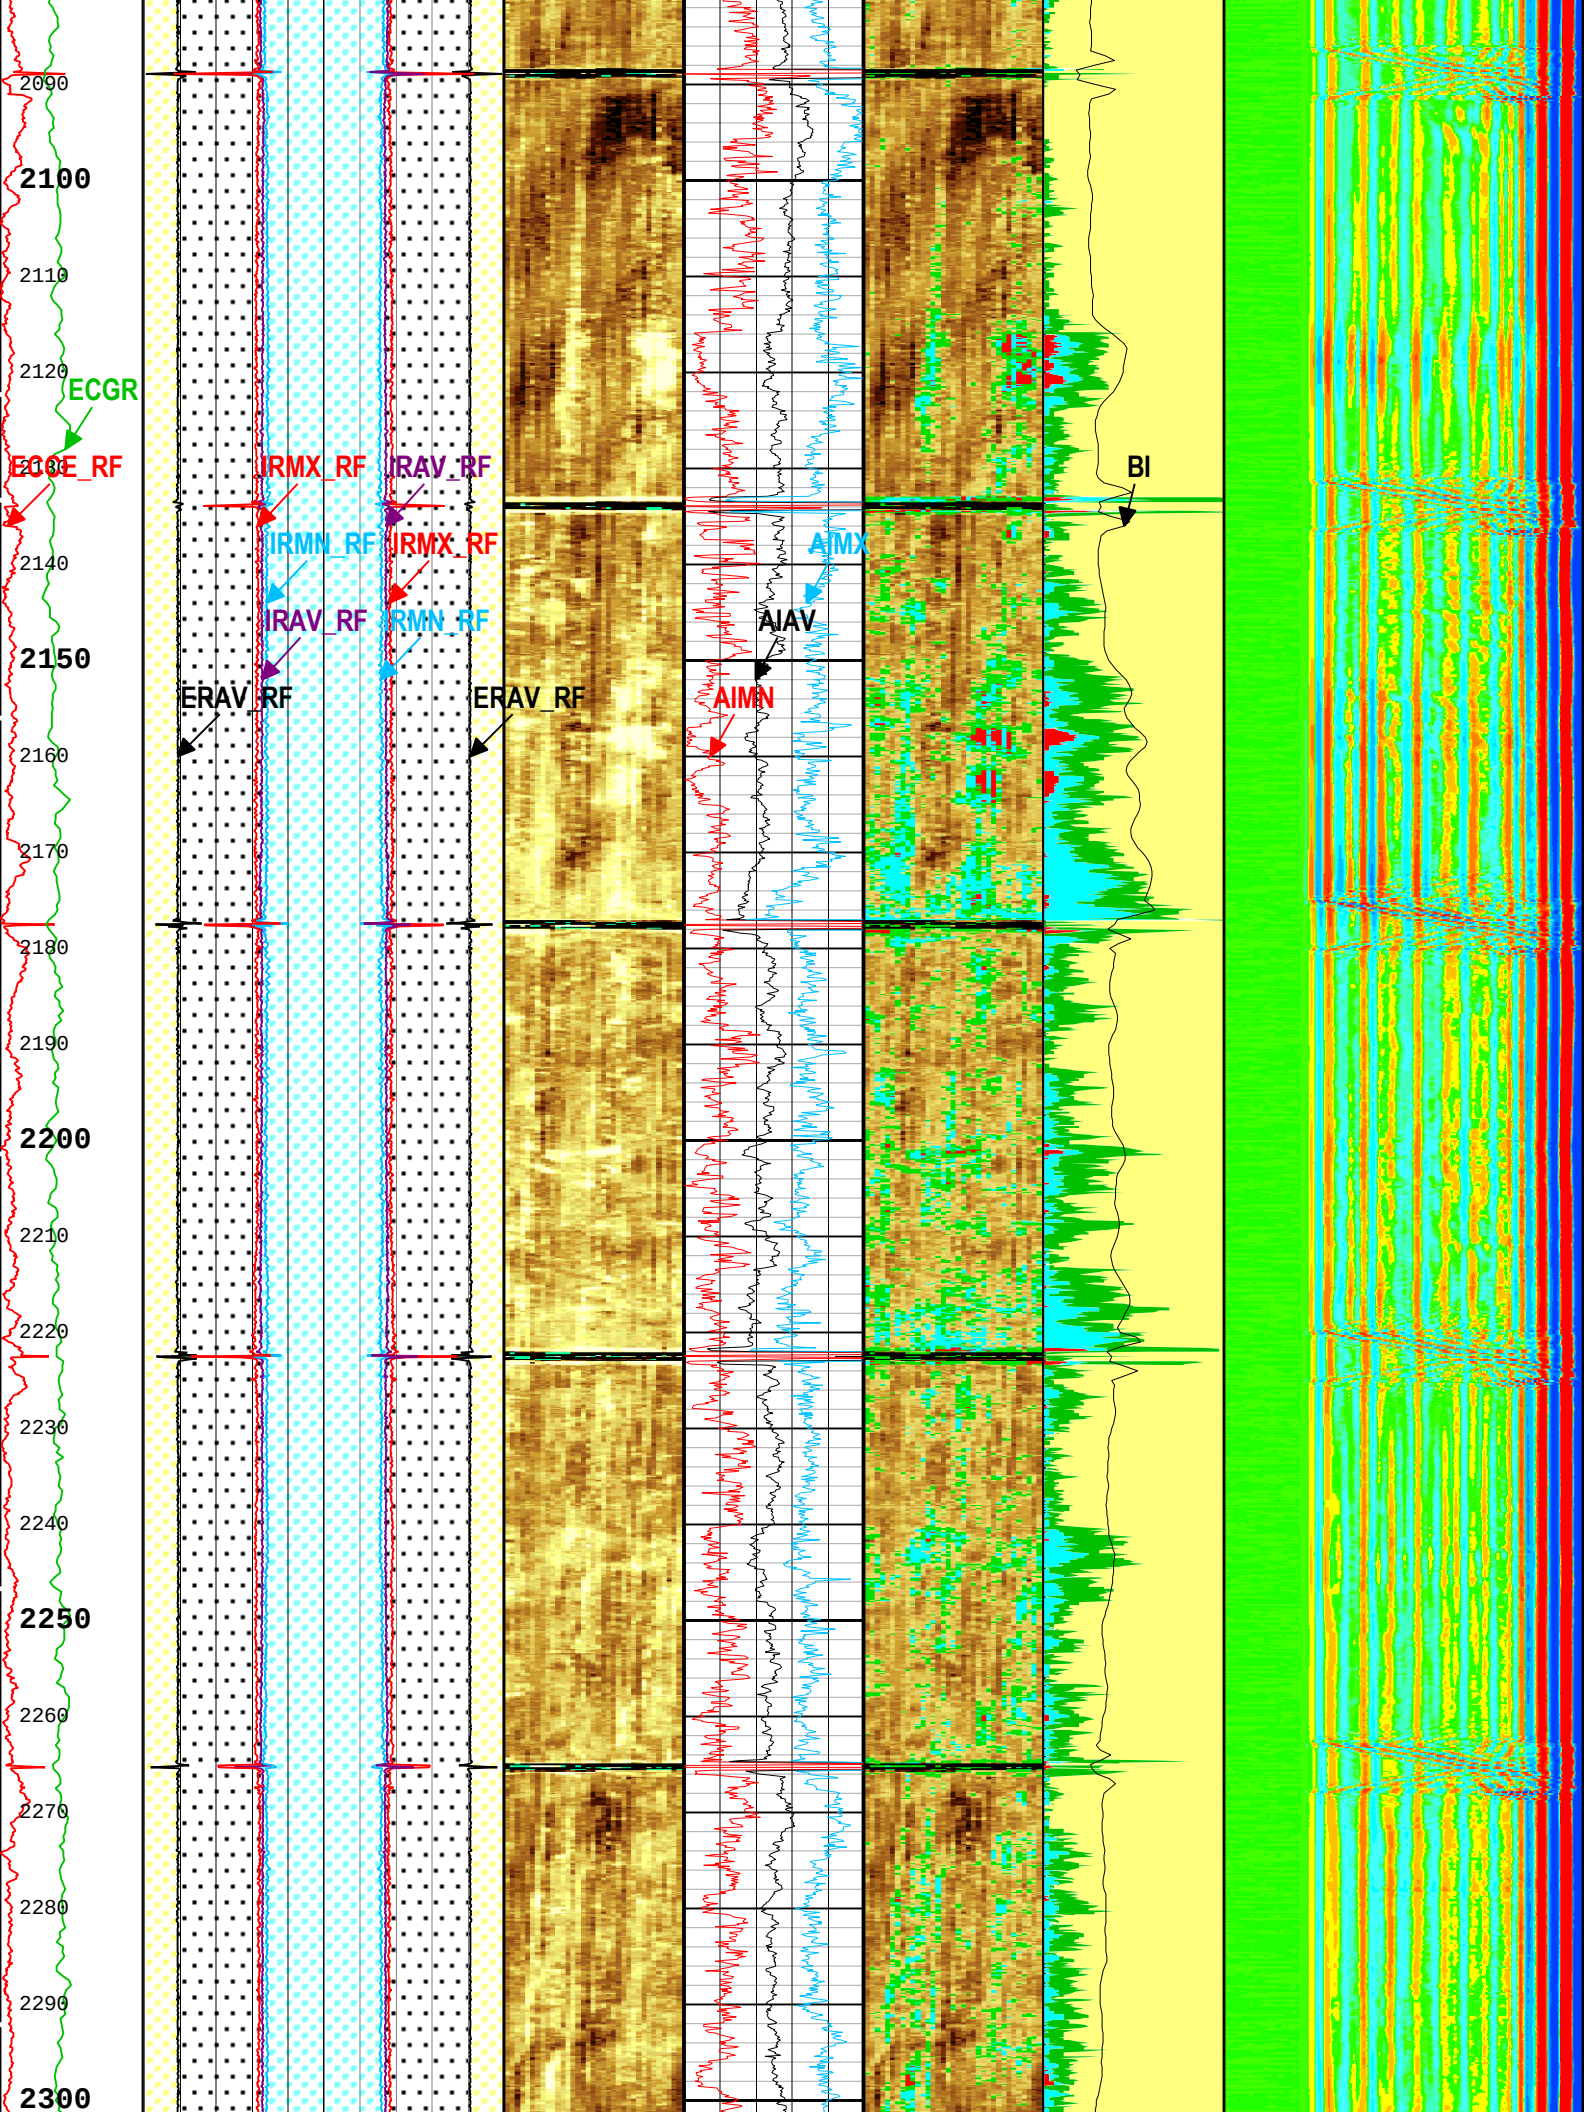
2090
2100
2110
2120
ECGR
ECOE_RF
IRMX_RF
IRAV_RF
BI
IRMN_RF
IRMX_RF
AIMX
2140
IRAV_RF
IRMN_RF
AIAV
2150
ERAV_RF
ERAV_RF
AIMN
2160
2170
2180
2190
2200
2210
2220
2230
2240
2250
2260
2270
2280
2290
2300

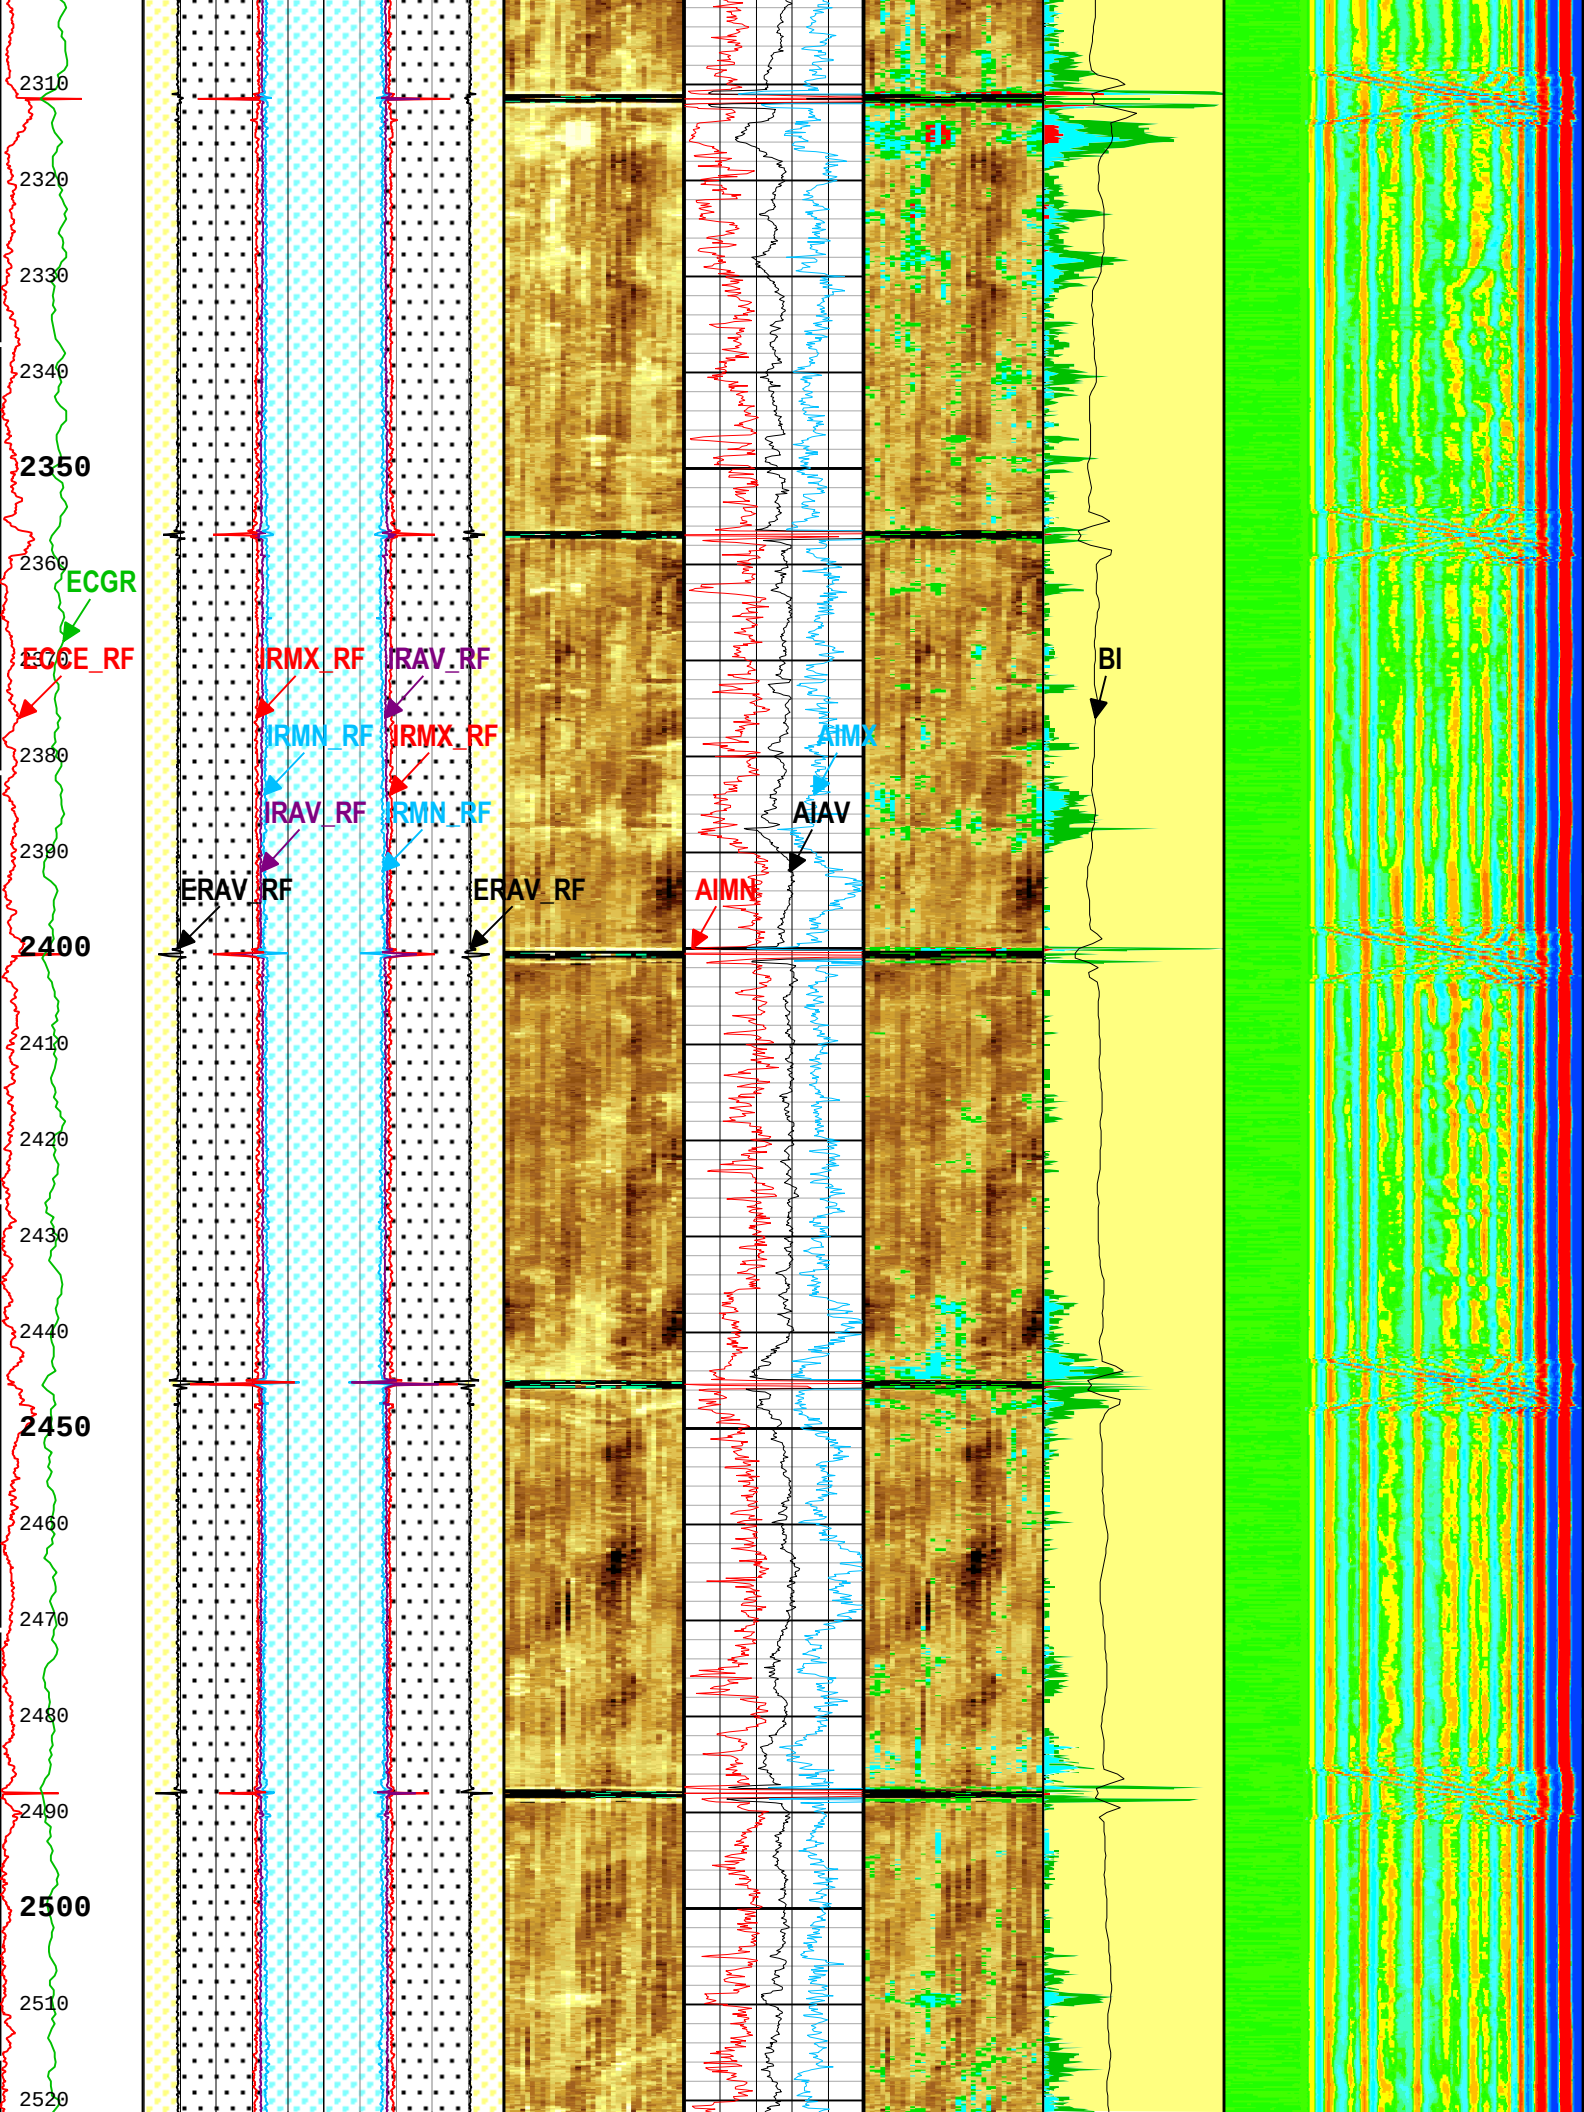
2310
2320
2330
2340
2350
2360
2370
2380
2390
2400
2410
2420
2430
2440
2450
2460
2470
2480
2490
2500
2510
2520
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

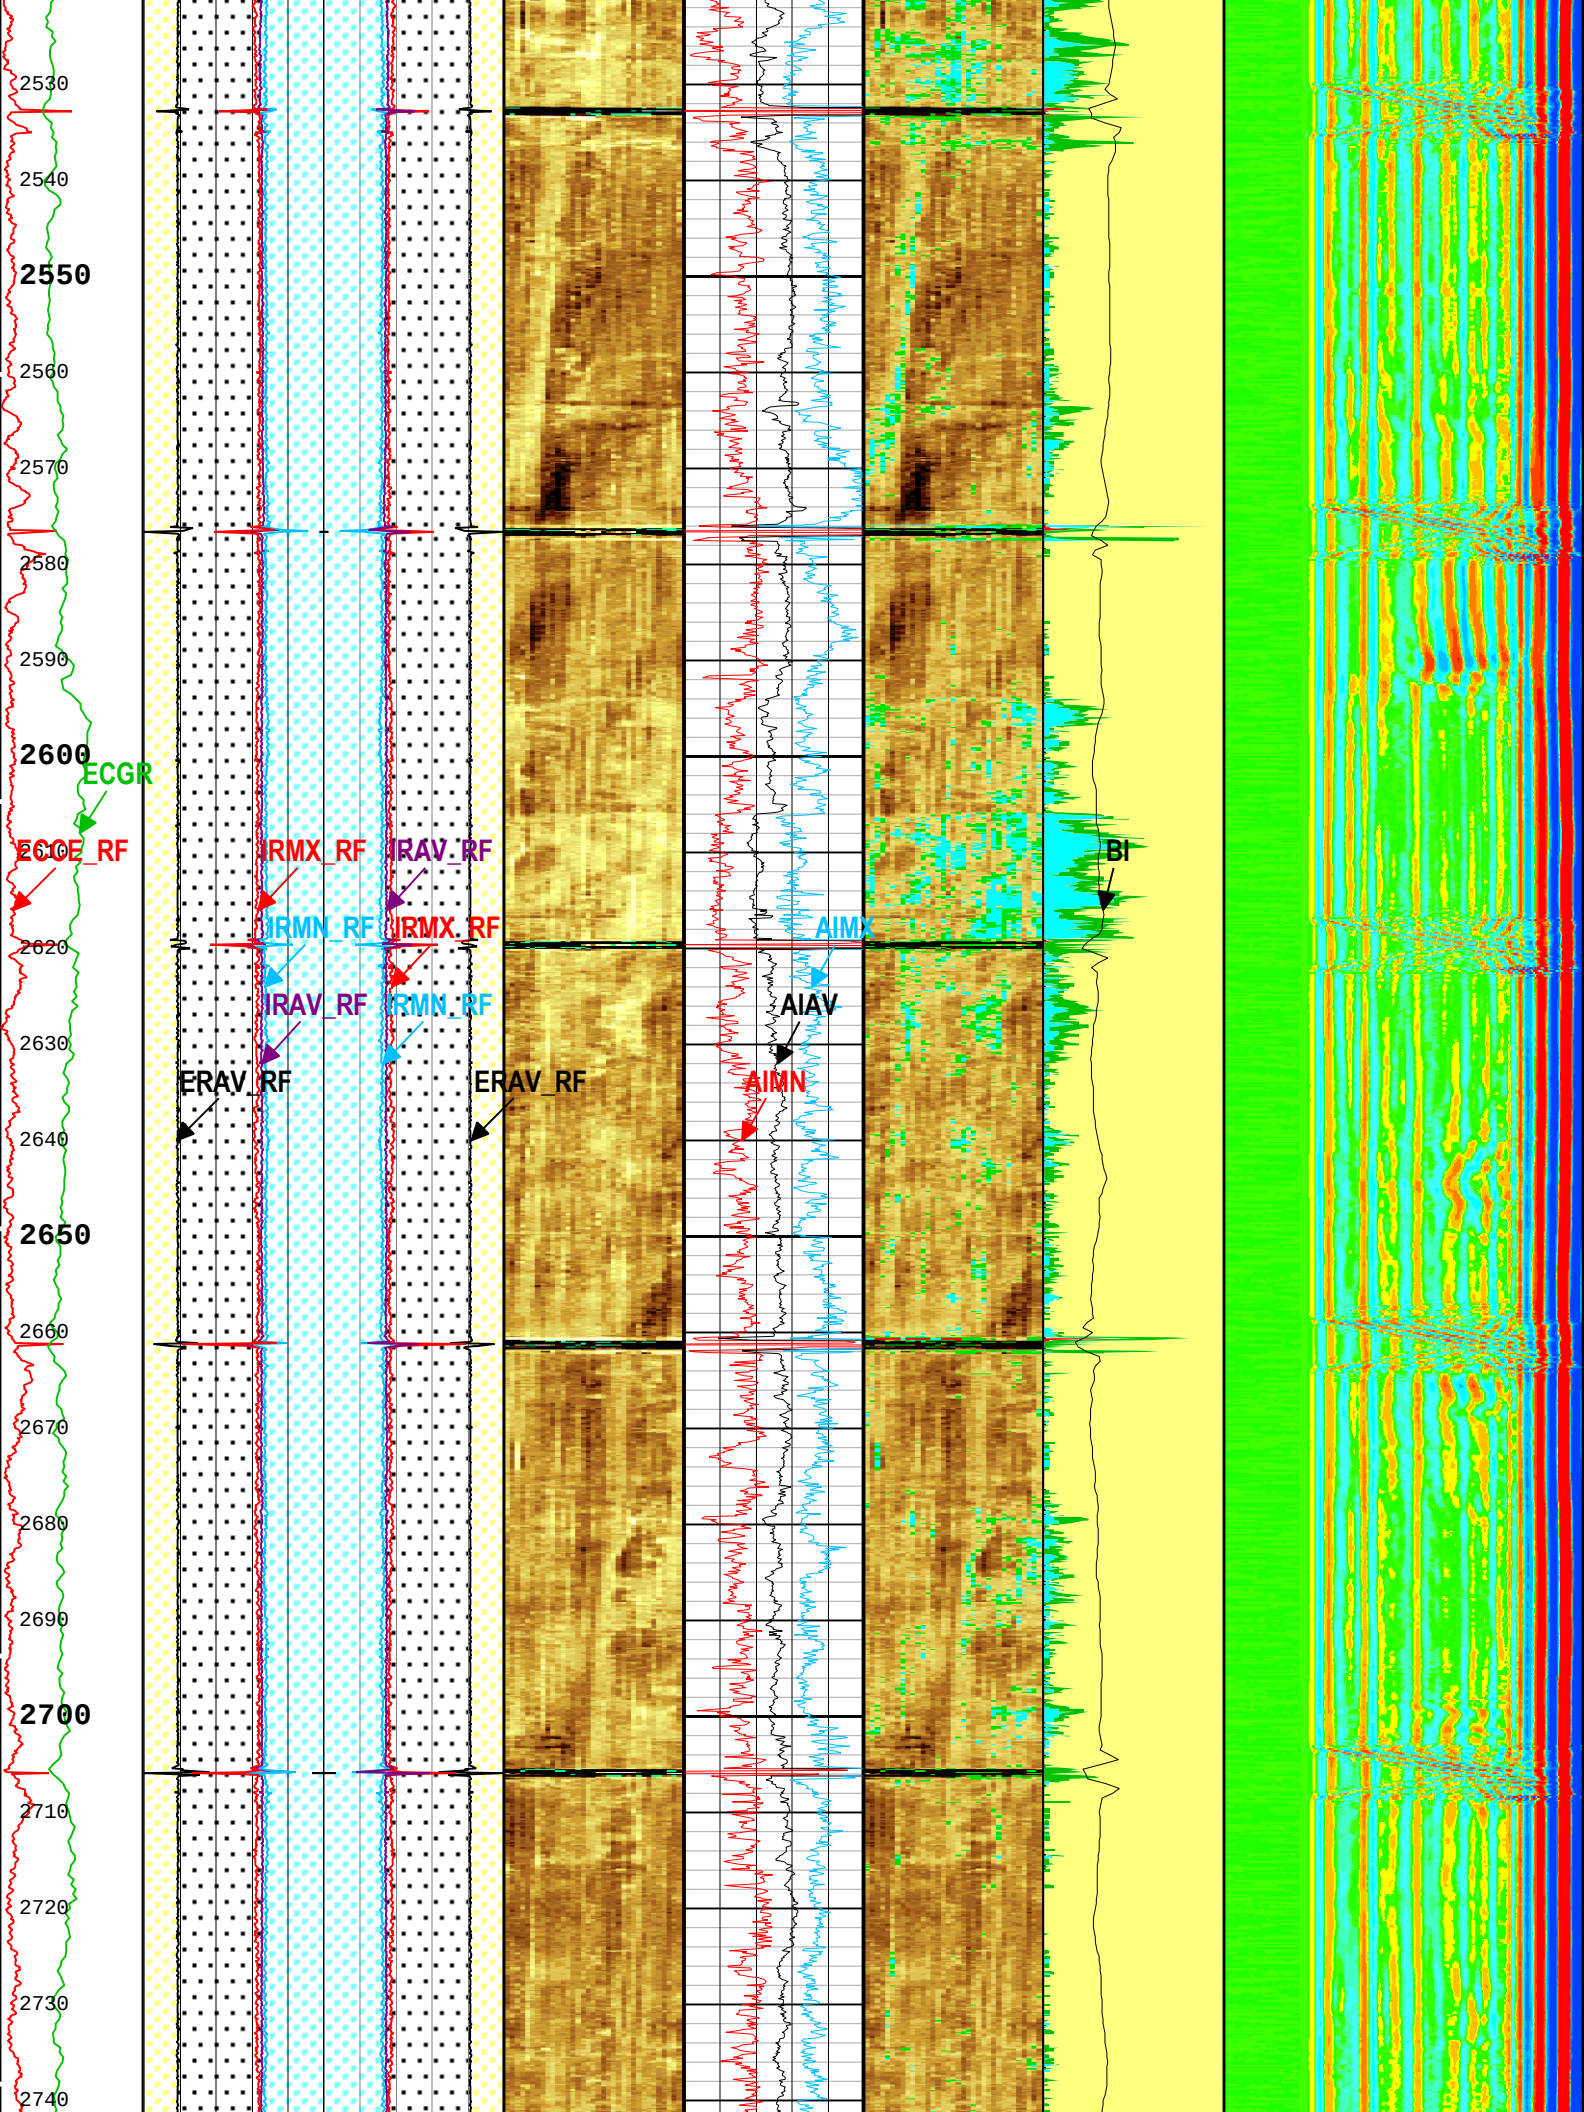
2530
2540
2550
2560
2570
2580
2590
2600
ECGR
ECOE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI
2620
2630
2640
2650
2660
2670
2680
2690
2700
2710
2720
2730
2740

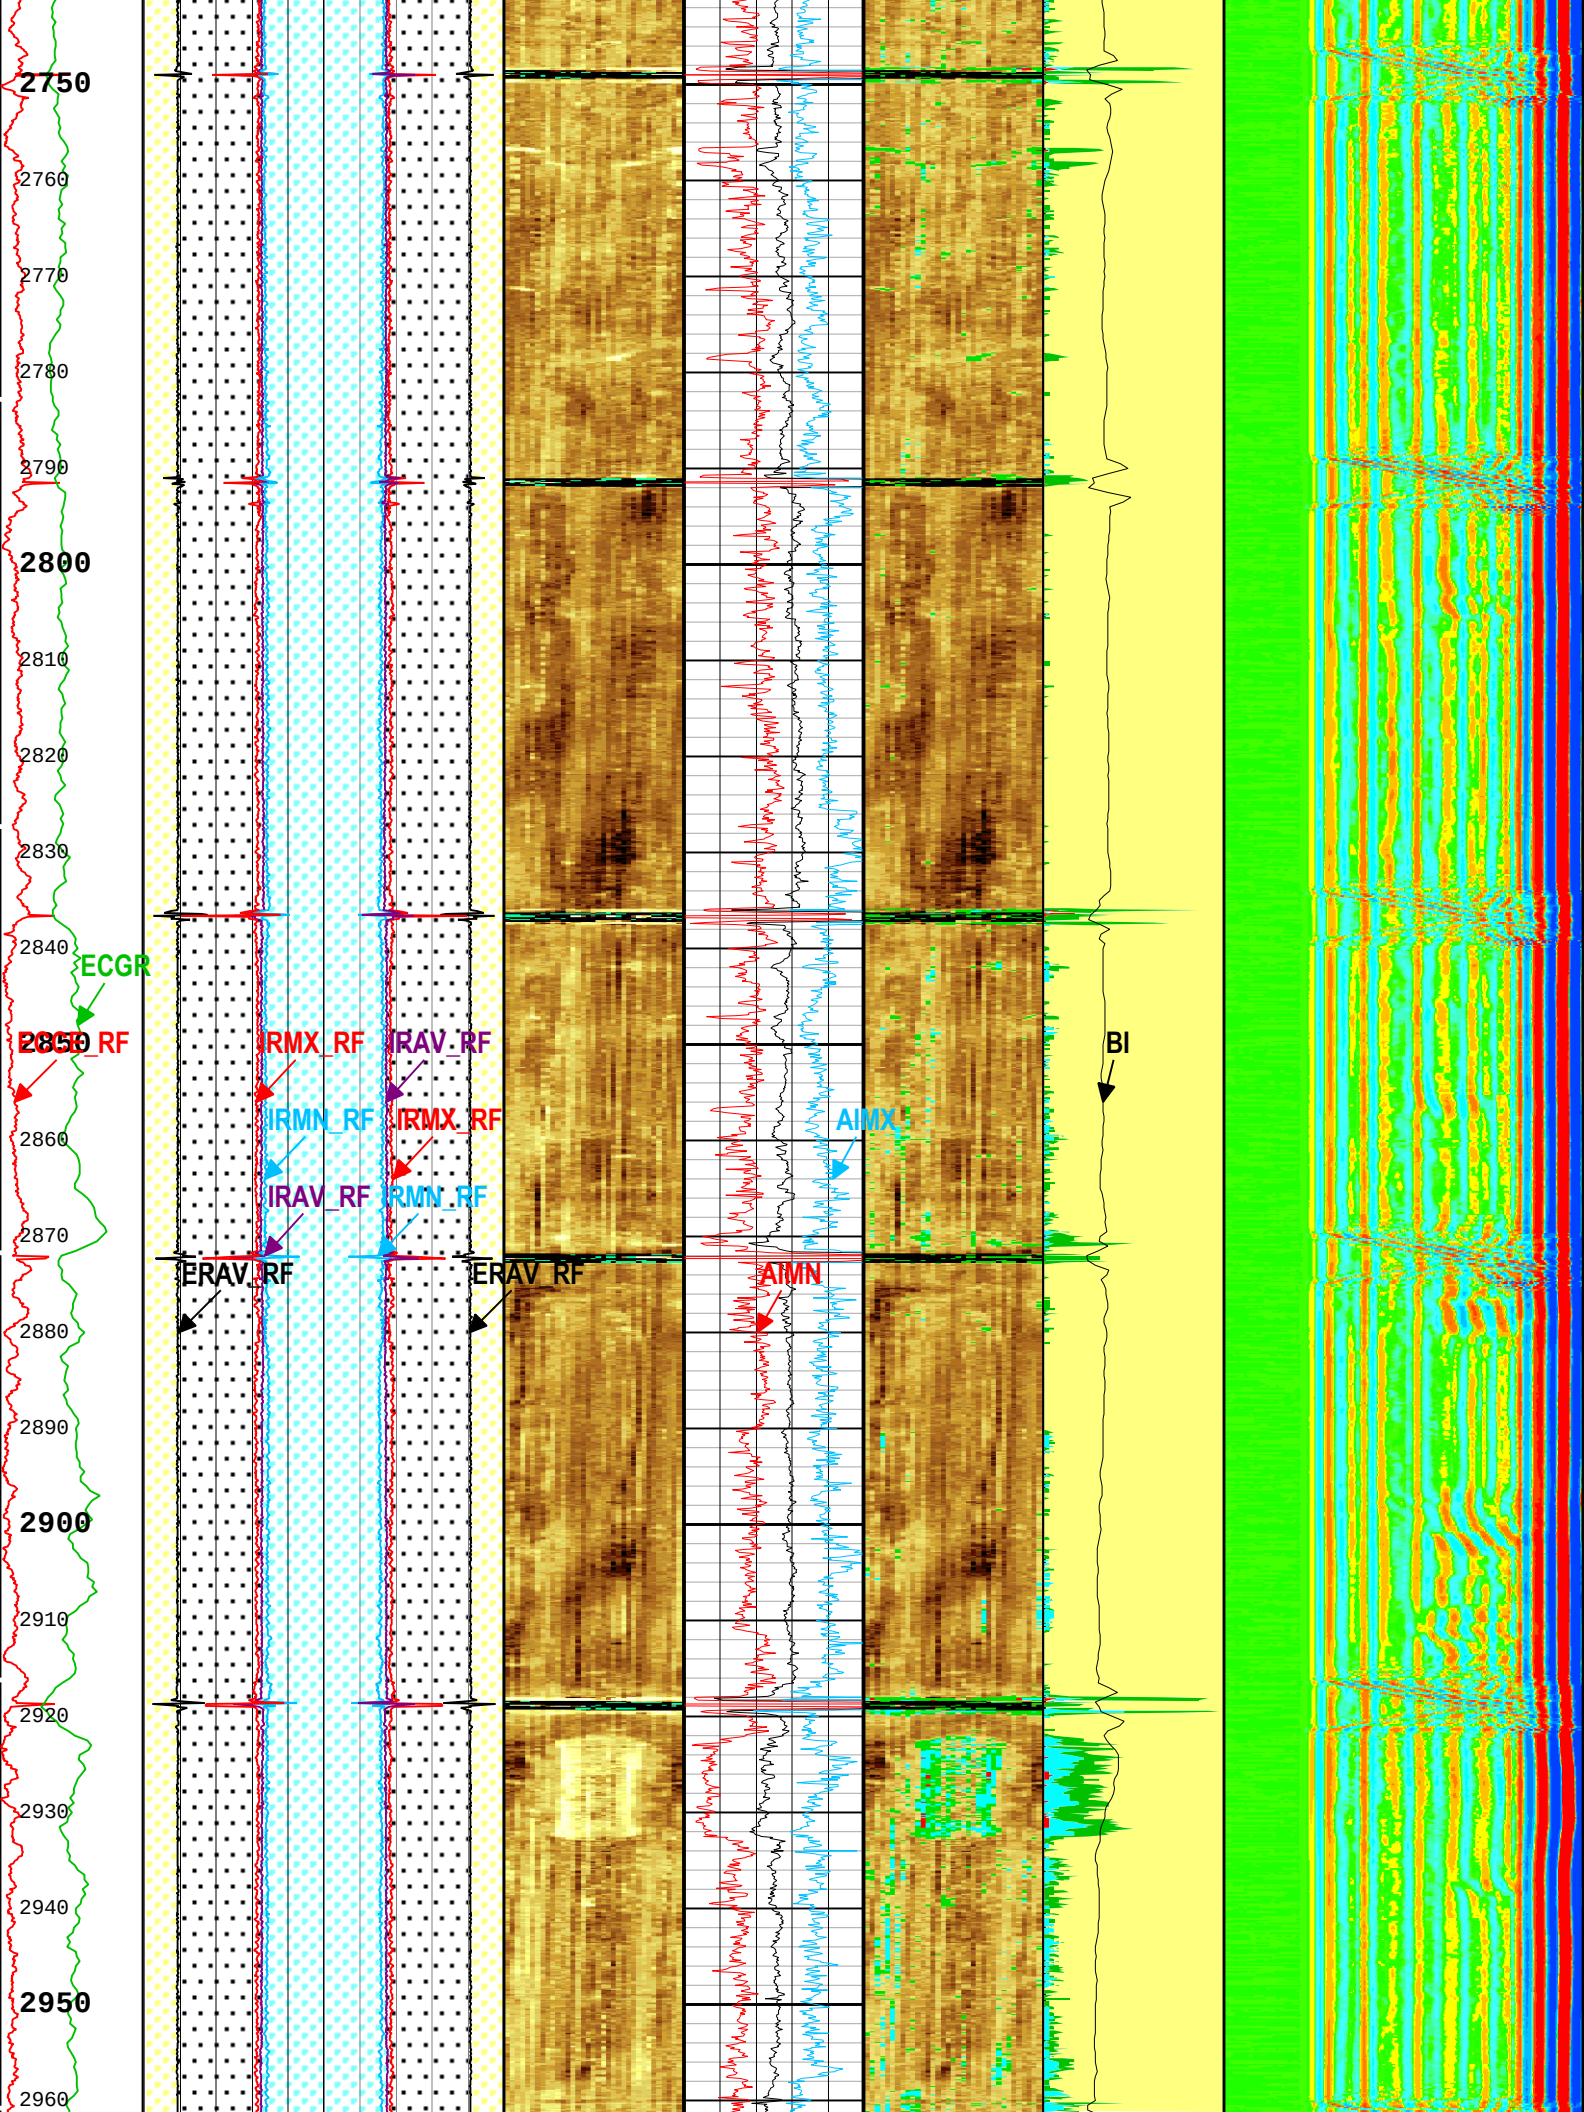
2750
2760
2770
2780
2790
2800
2810
2820
2830
2840
ECGR
2850
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
2860
2870
ERAV_RF
ERAV_RF
AIMN
AIMX
BI
2880
2890
2900
2910
2920
2930
2940
2950
2960

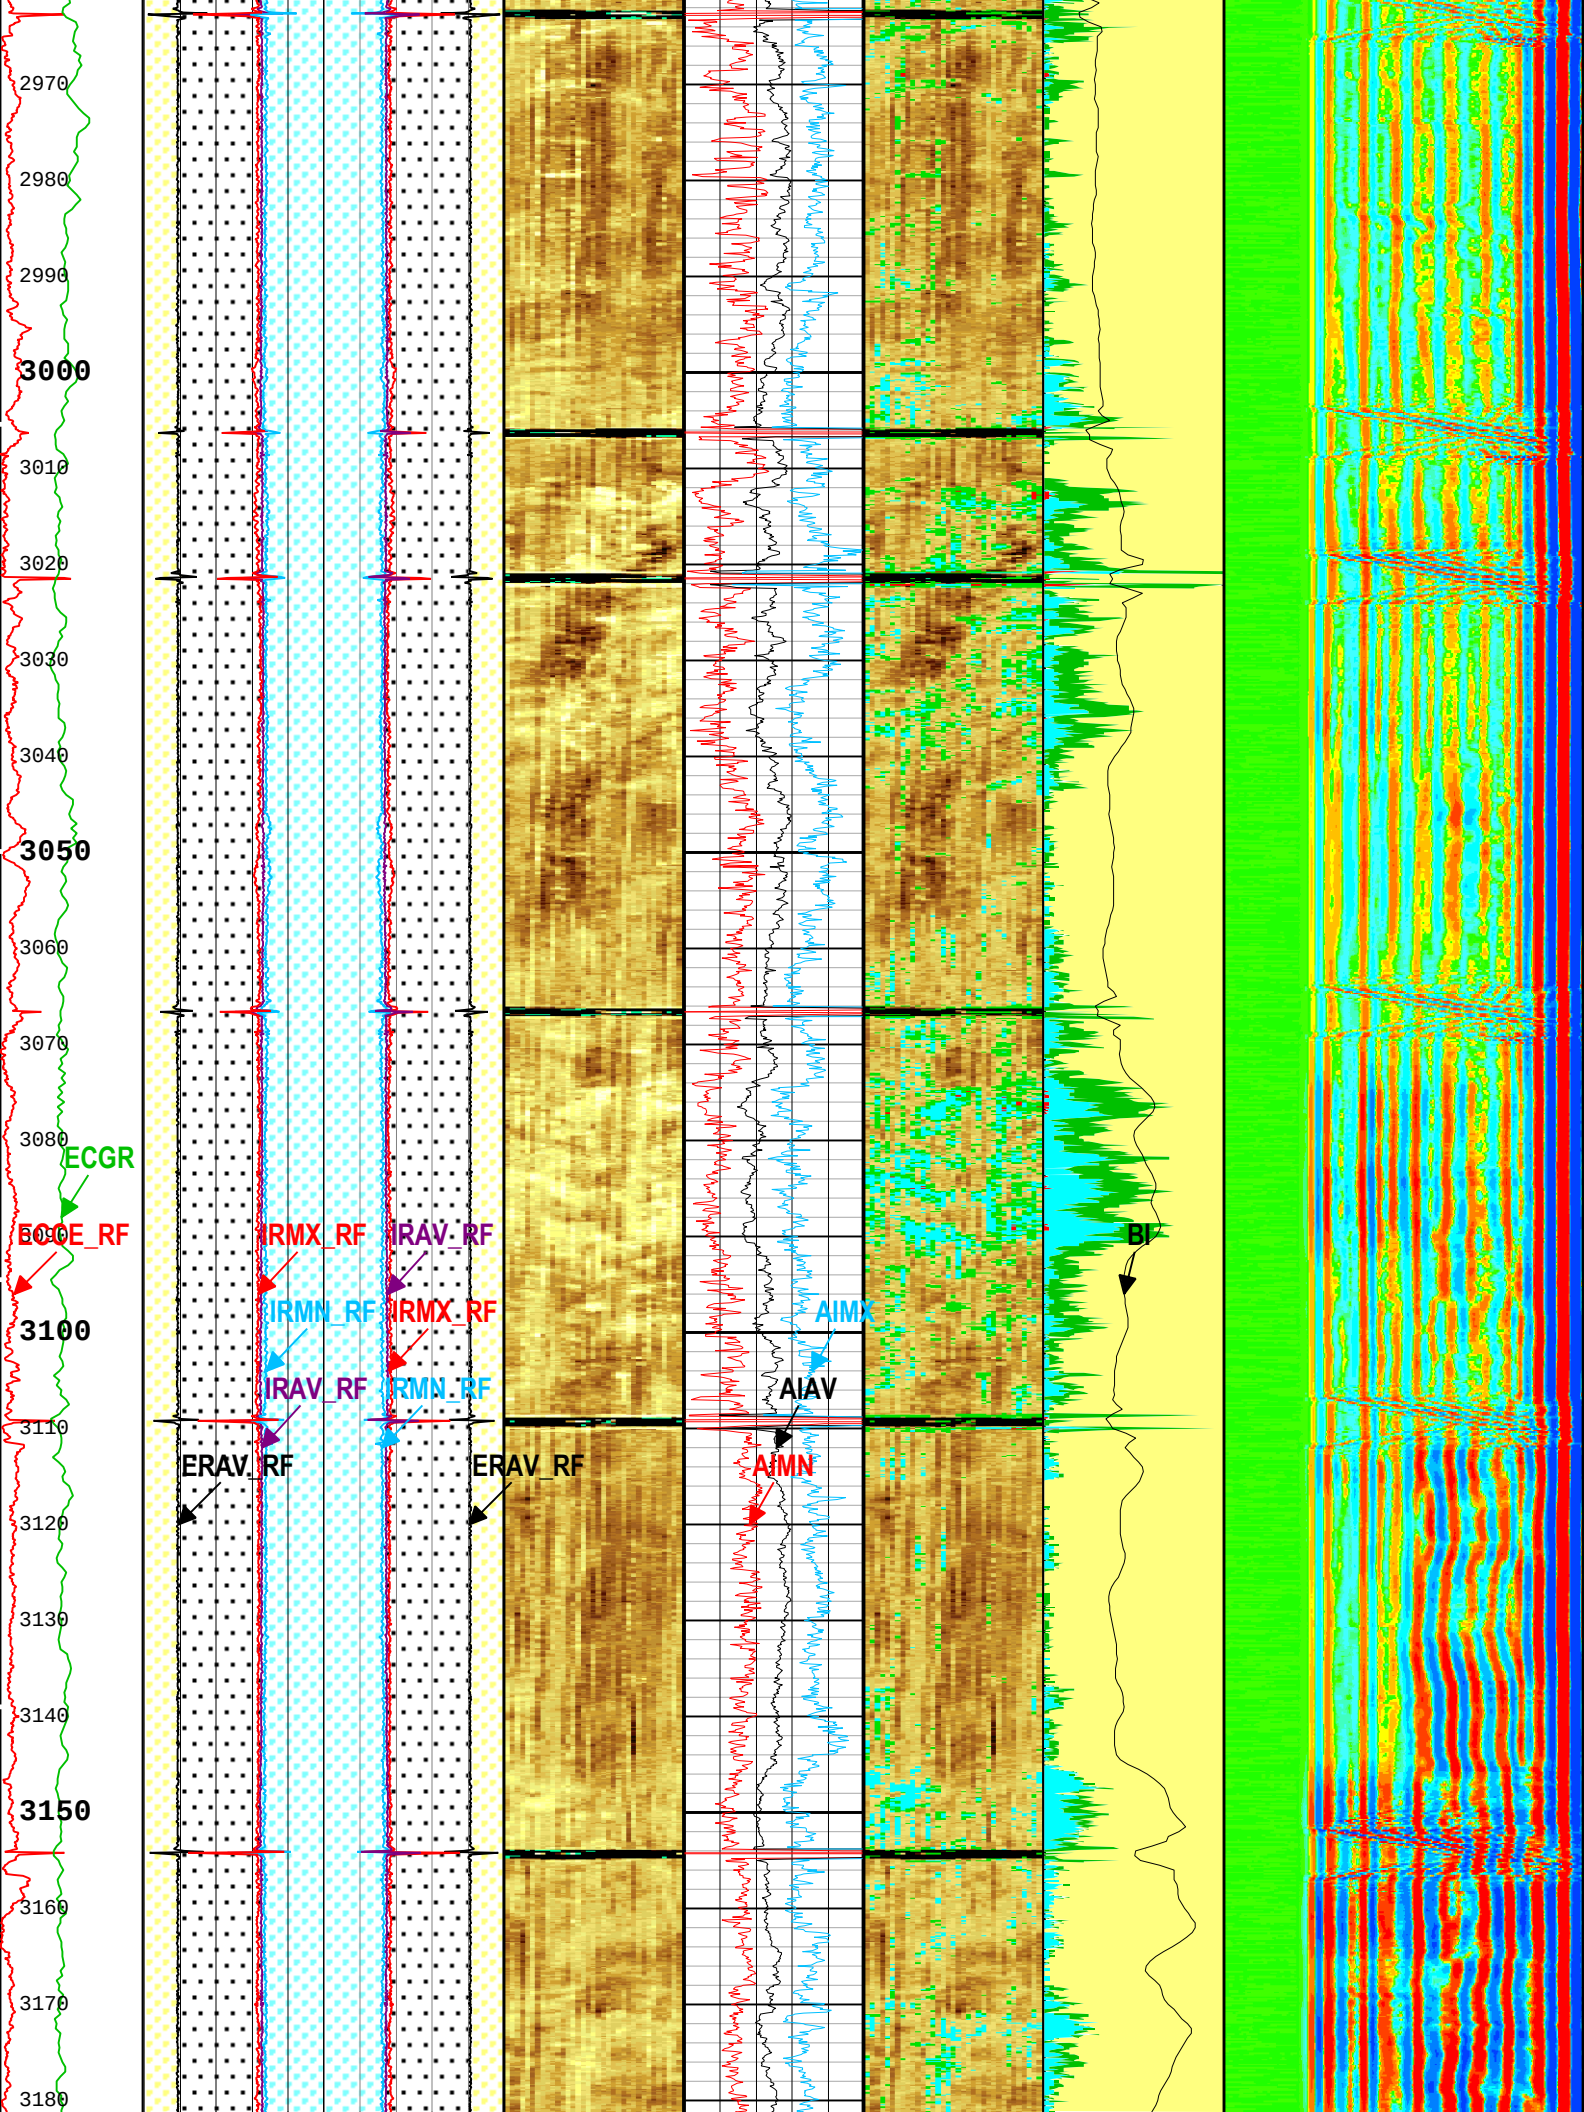
2970
2980
2990
3000
3010
3020
3030
3040
3050
3060
3070
3080
ECGR
ECDE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
3100
IRAV_RF
IRMN_RF
AIMX
AIAV
3110
ERAV_RF
ERAV_RF
AIMN
BI
3120
3130
3140
3150
3160
3170
3180

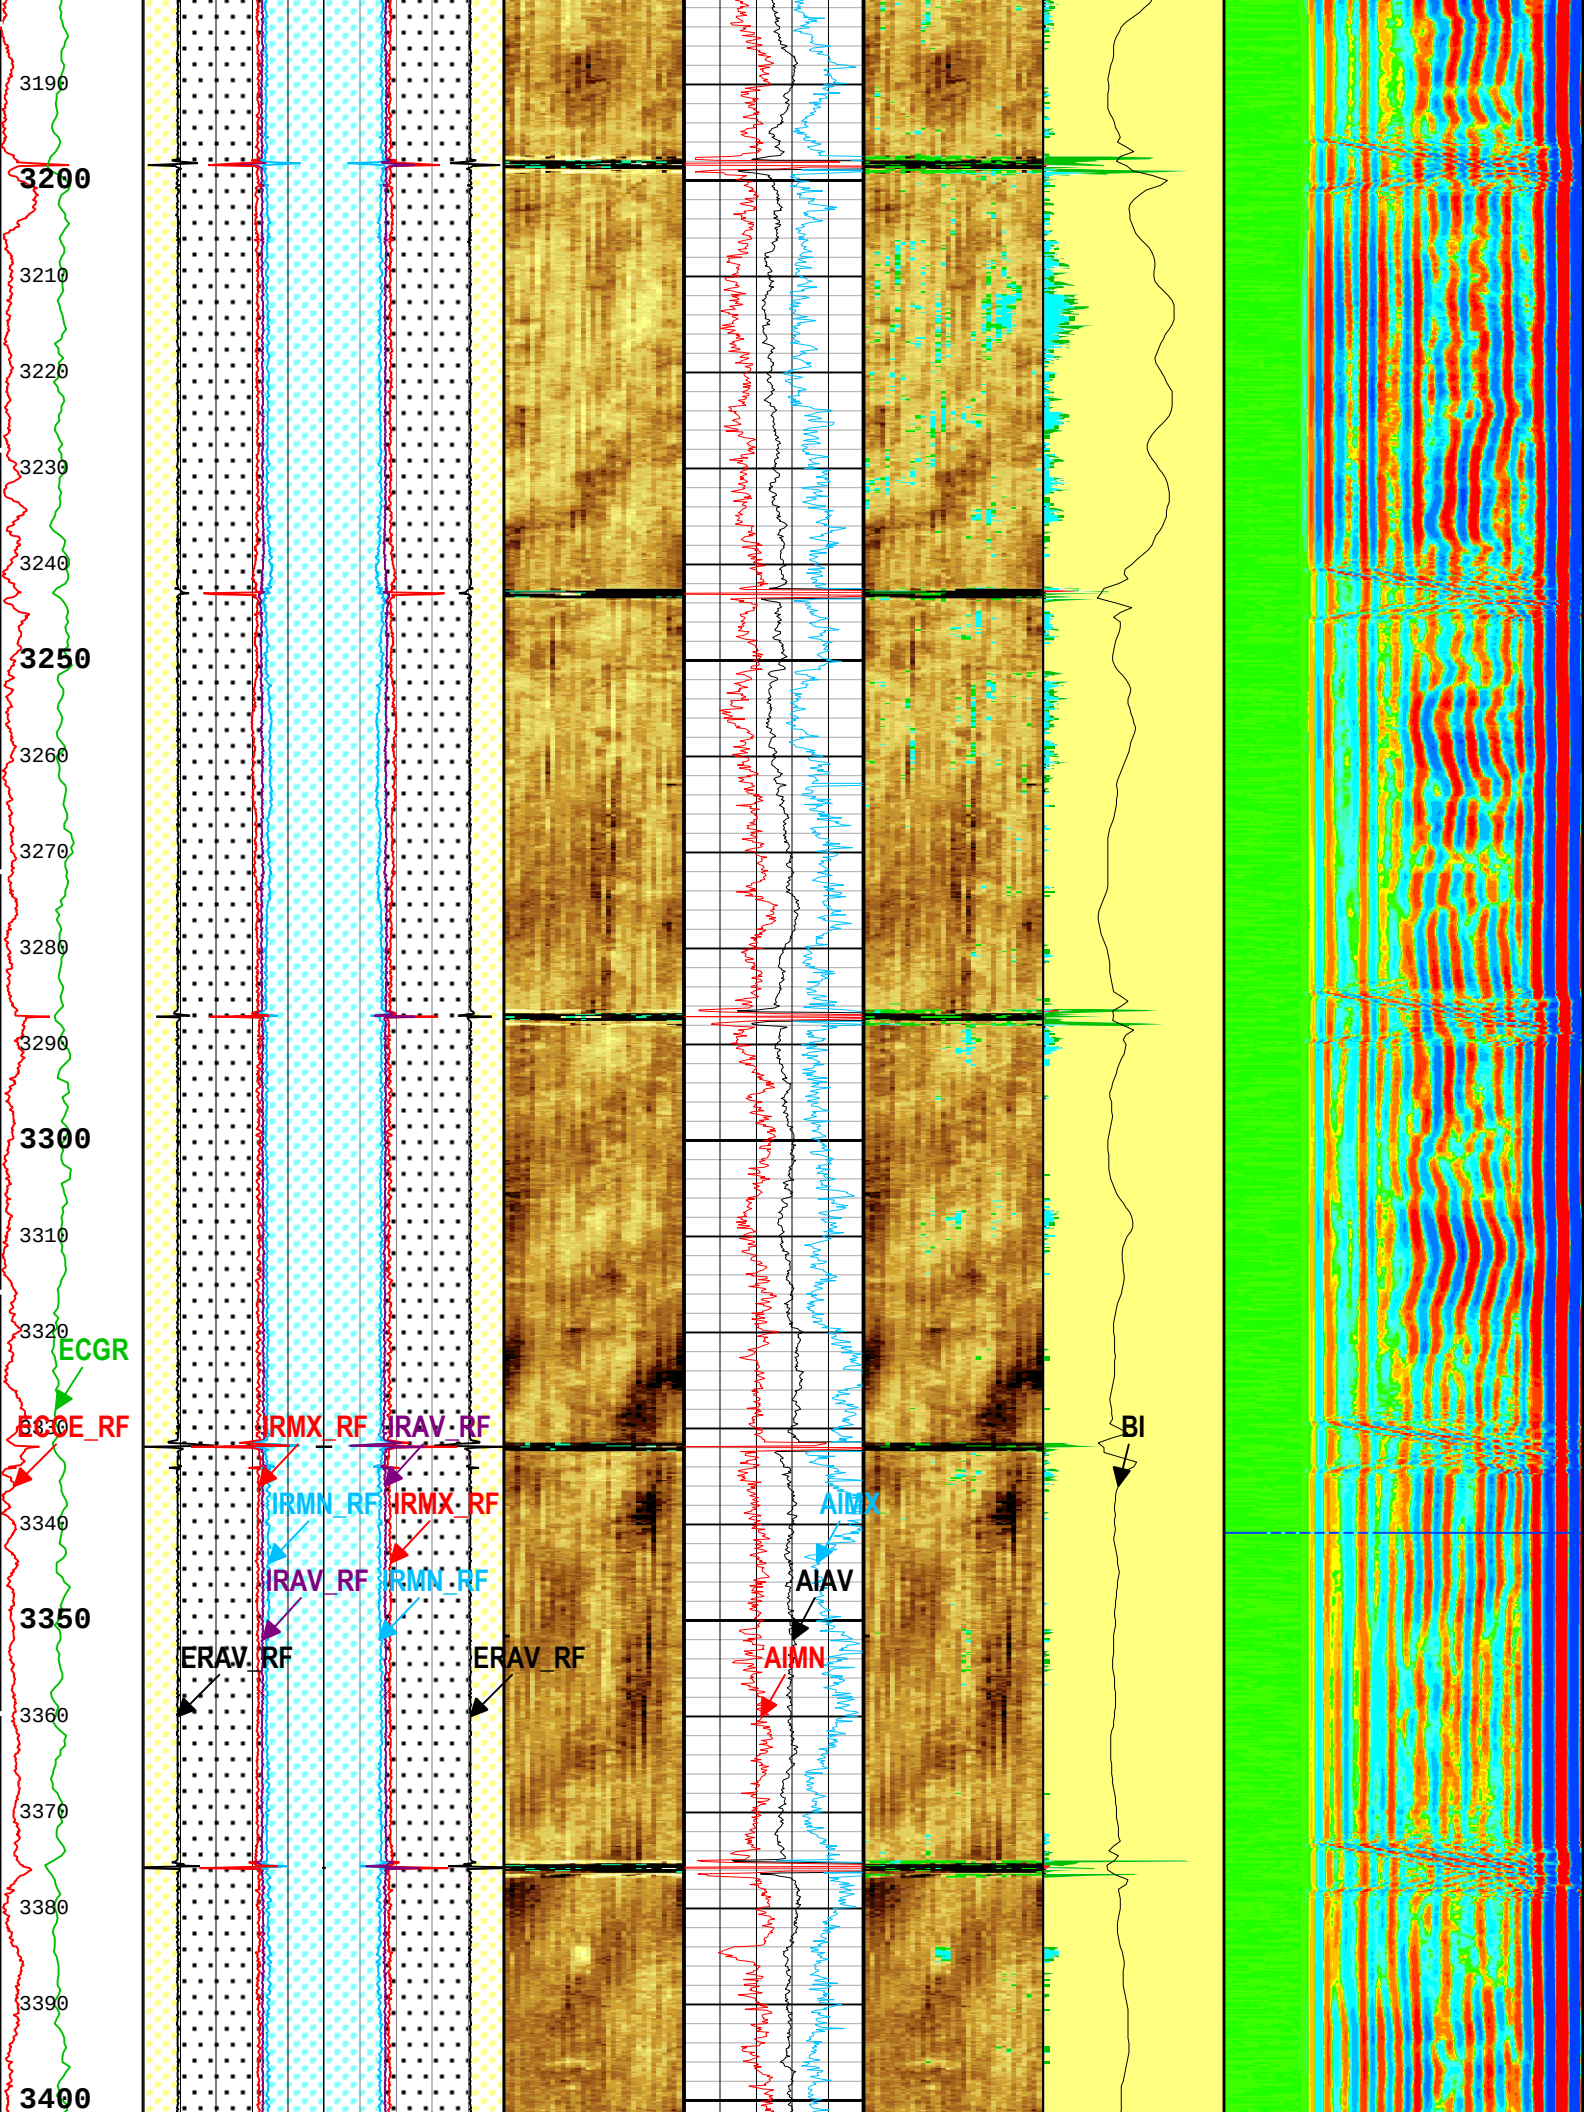
3190
3200
3210
3220
3230
3240
3250
3260
3270
3280
3290
3300
3310
3320
3330
3340
3350
3360
3370
3380
3390
3400
ECGR
ECDE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

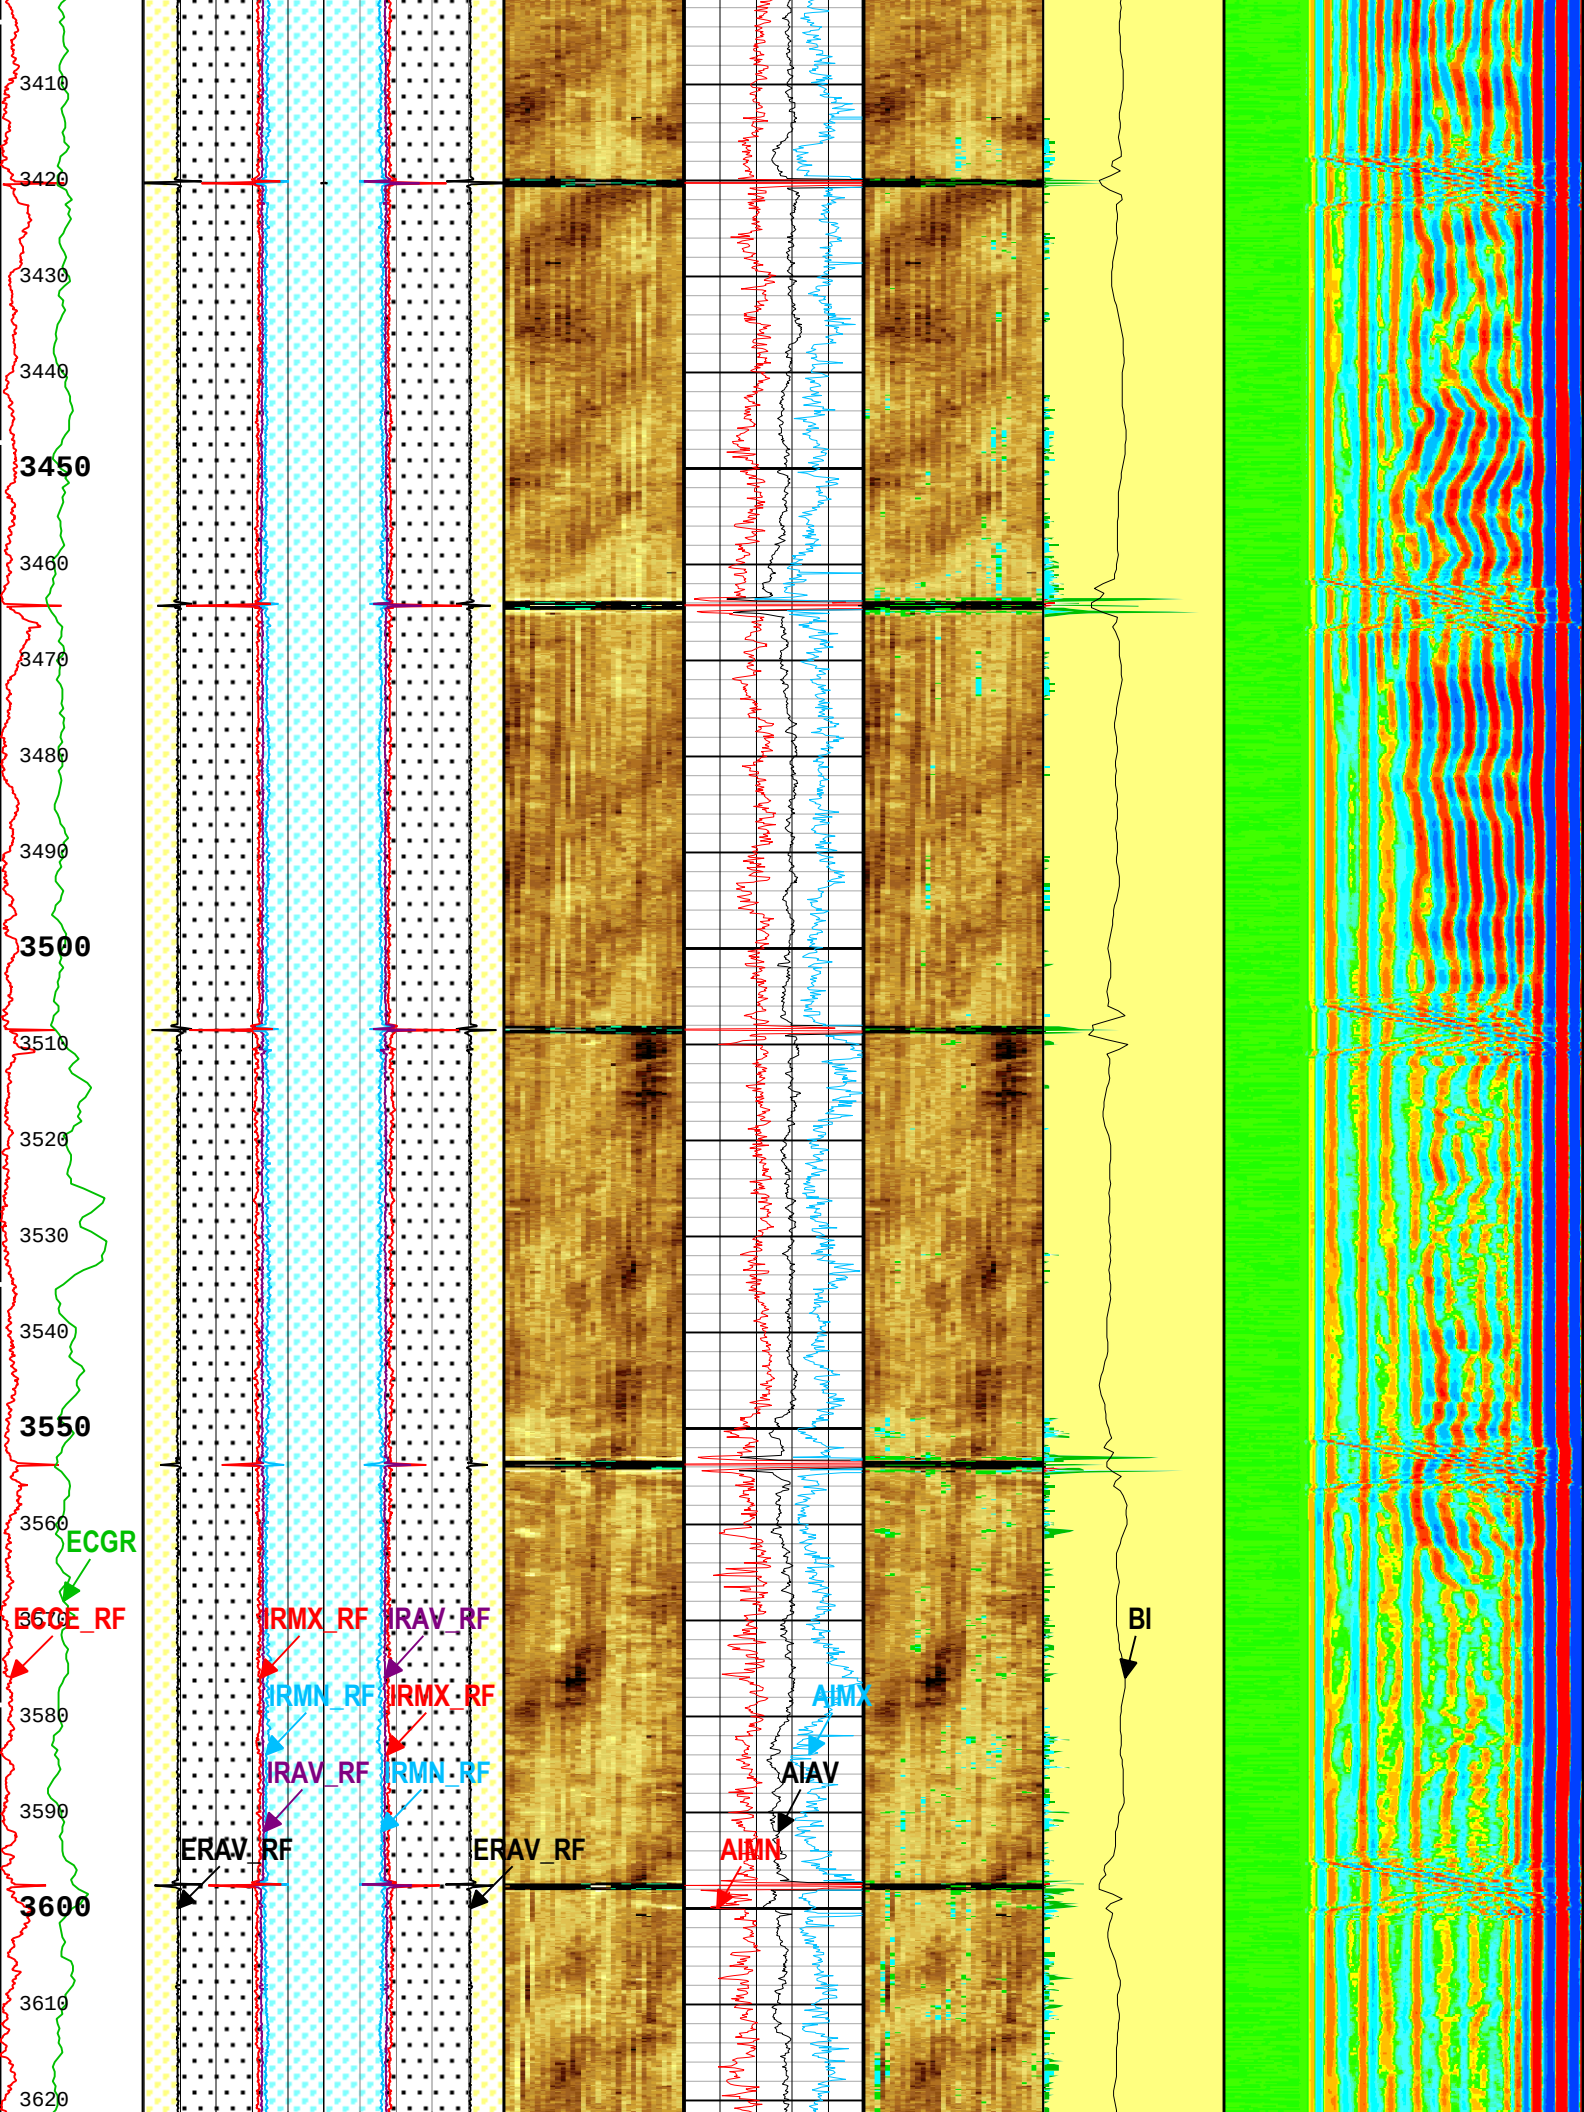
3410
3420
3430
3440
3450
3460
3470
3480
3490
3500
3510
3520
3530
3540
3550
3560
3570
3580
3590
3600
3610
3620
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

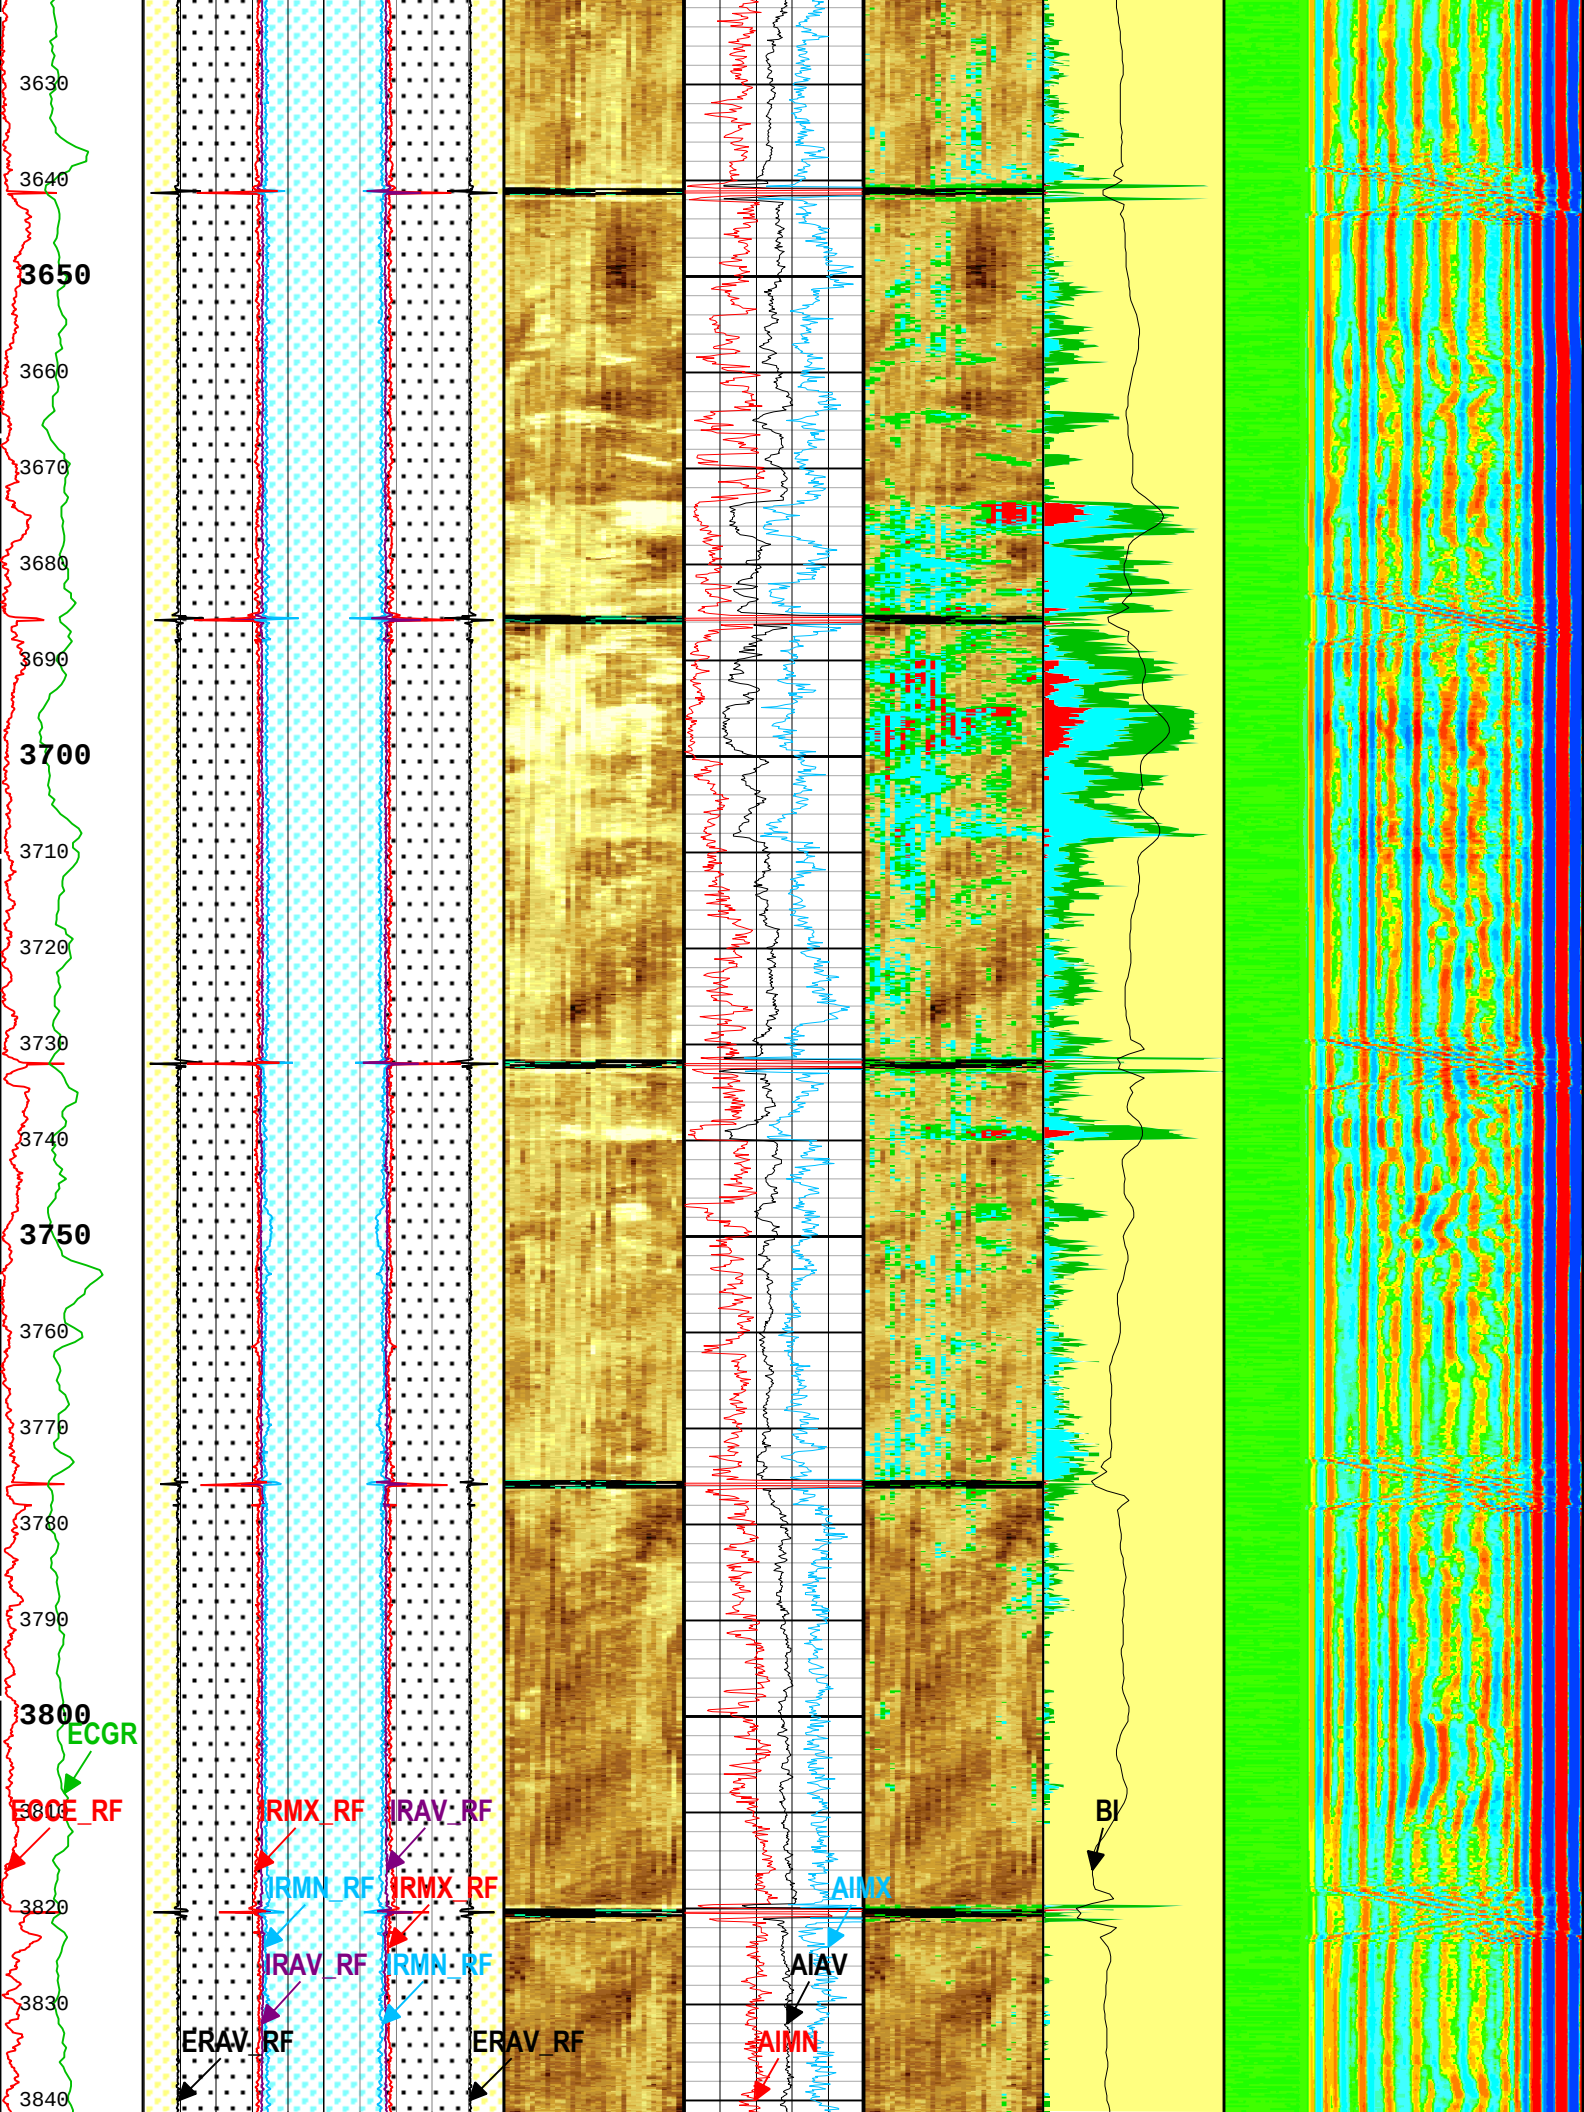
3630
3640
3650
3660
3670
3680
3690
3700
3710
3720
3730
3740
3750
3760
3770
3780
3790
3800
3810
3820
3830
3840
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

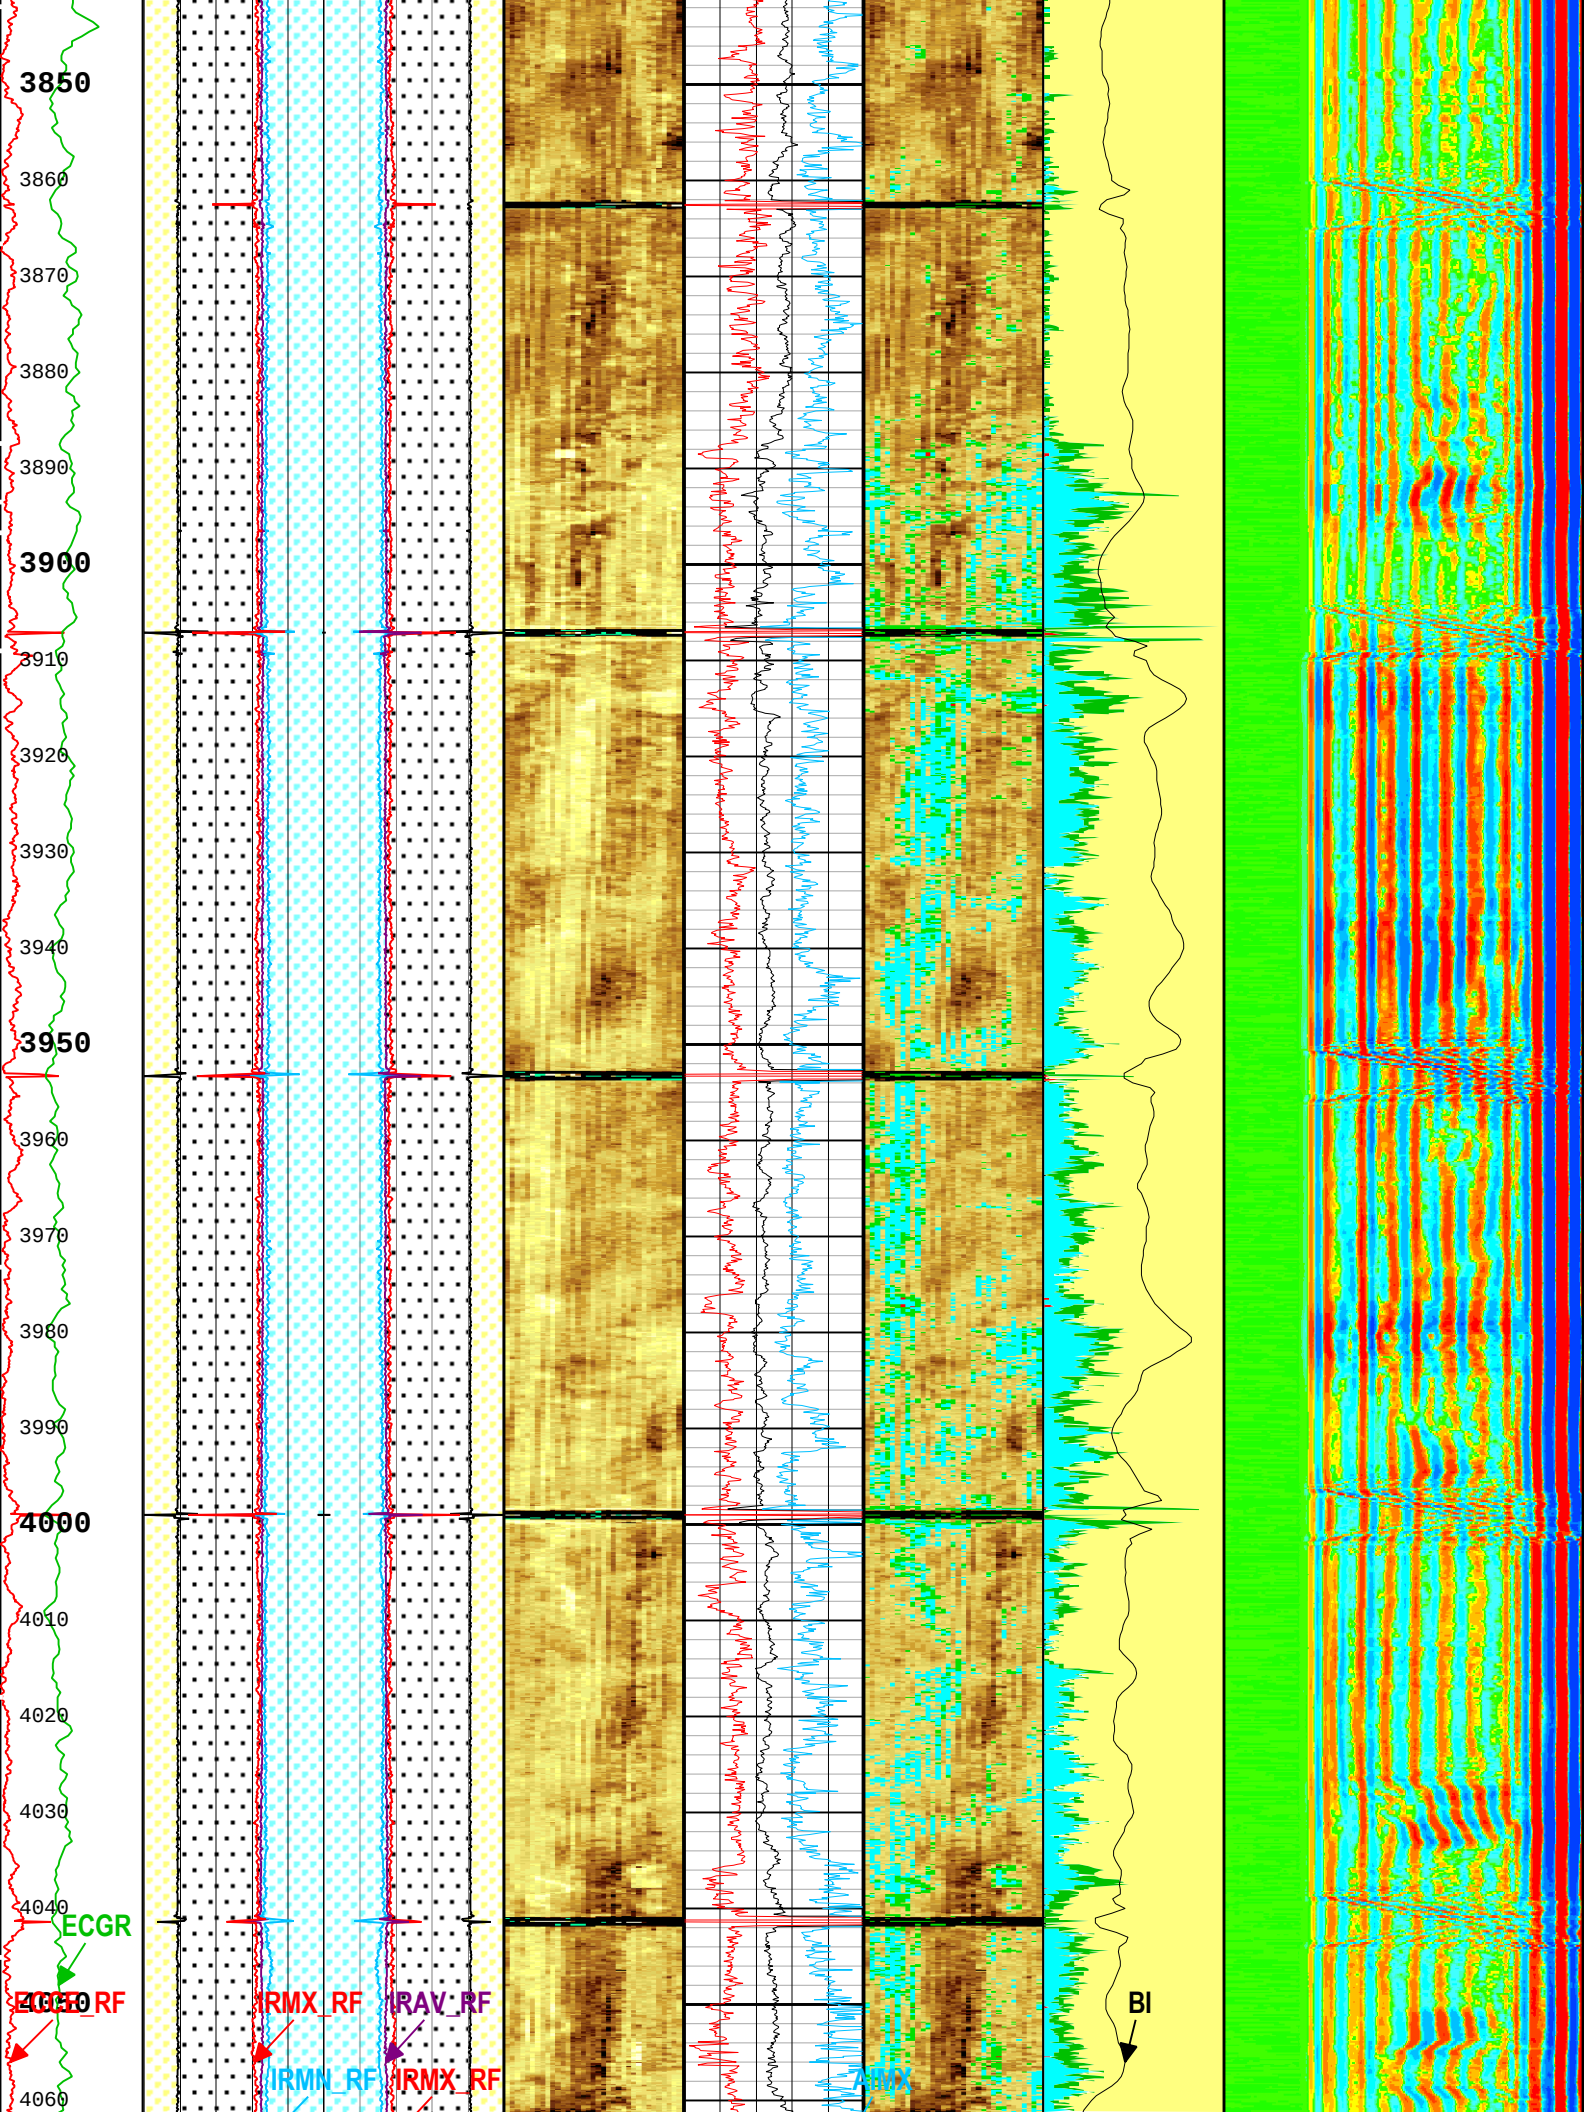
3850
3860
3870
3880
3890
3900
3910
3920
3930
3940
3950
3960
3970
3980
3990
4000
4010
4020
4030
4040
4050
4060
ECGR
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
AIMX
BI

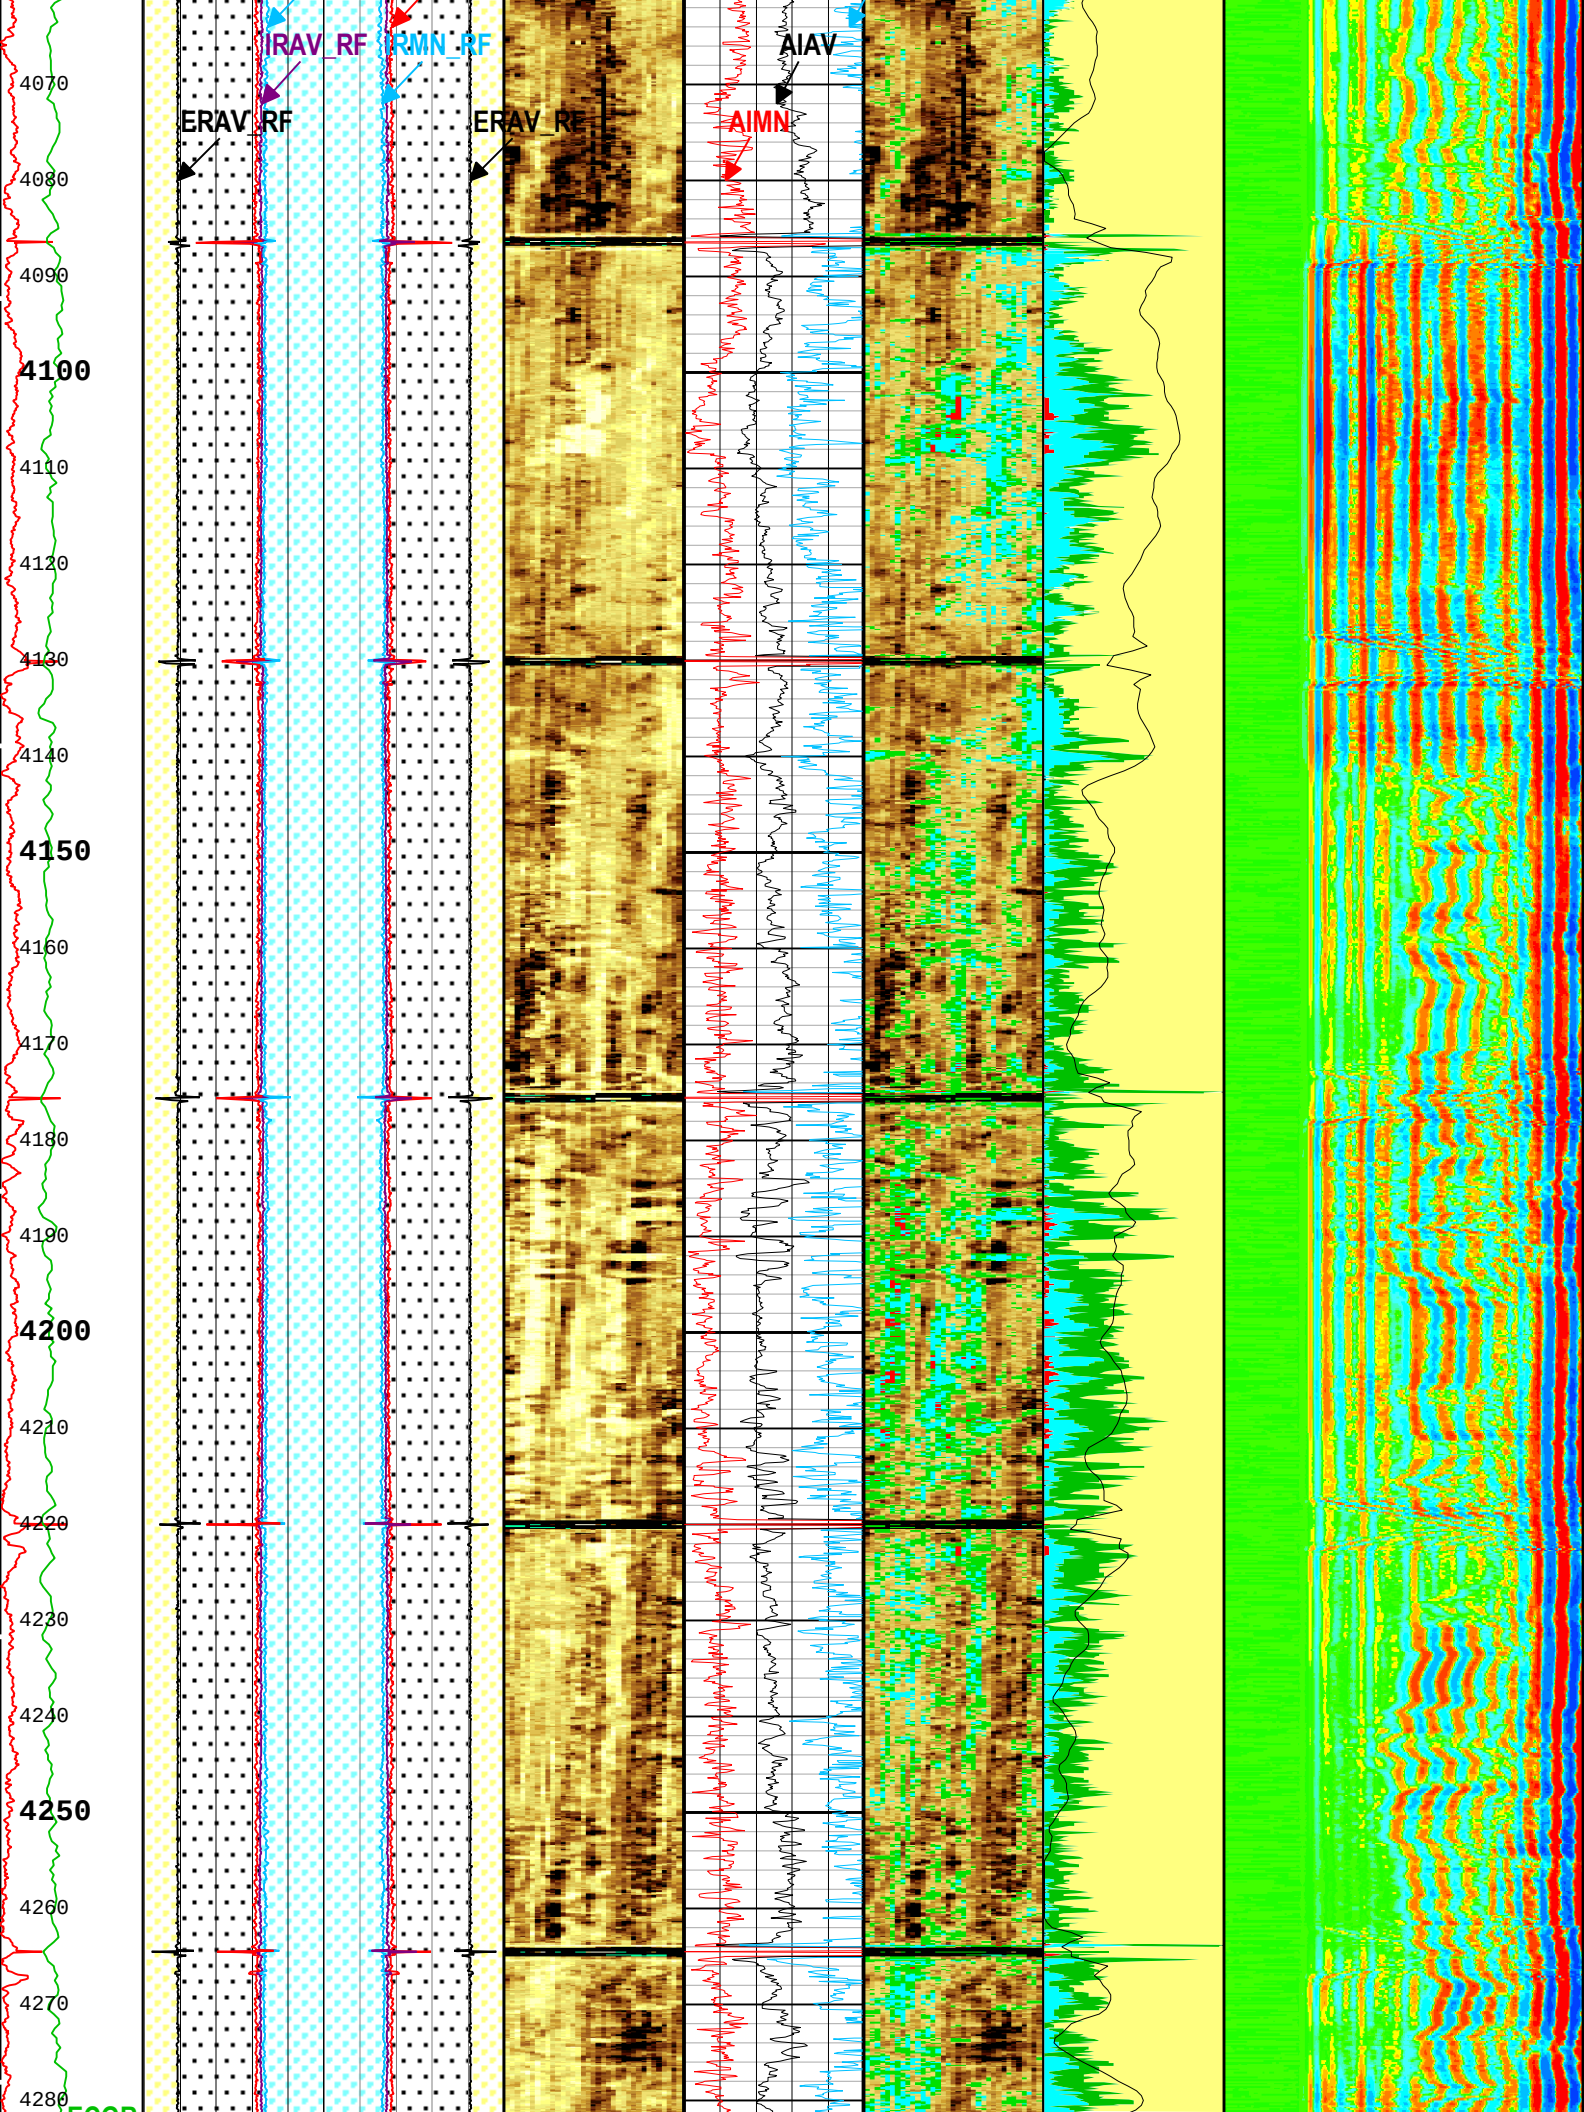
IRAV_RF
IRMN_RF
AIAV
ERAV_RF
ERAV_RF
AIMN
4070
4080
4090
4100
4110
4120
4130
4140
4150
4160
4170
4180
4190
4200
4210
4220
4230
4240
4250
4260
4270
4280

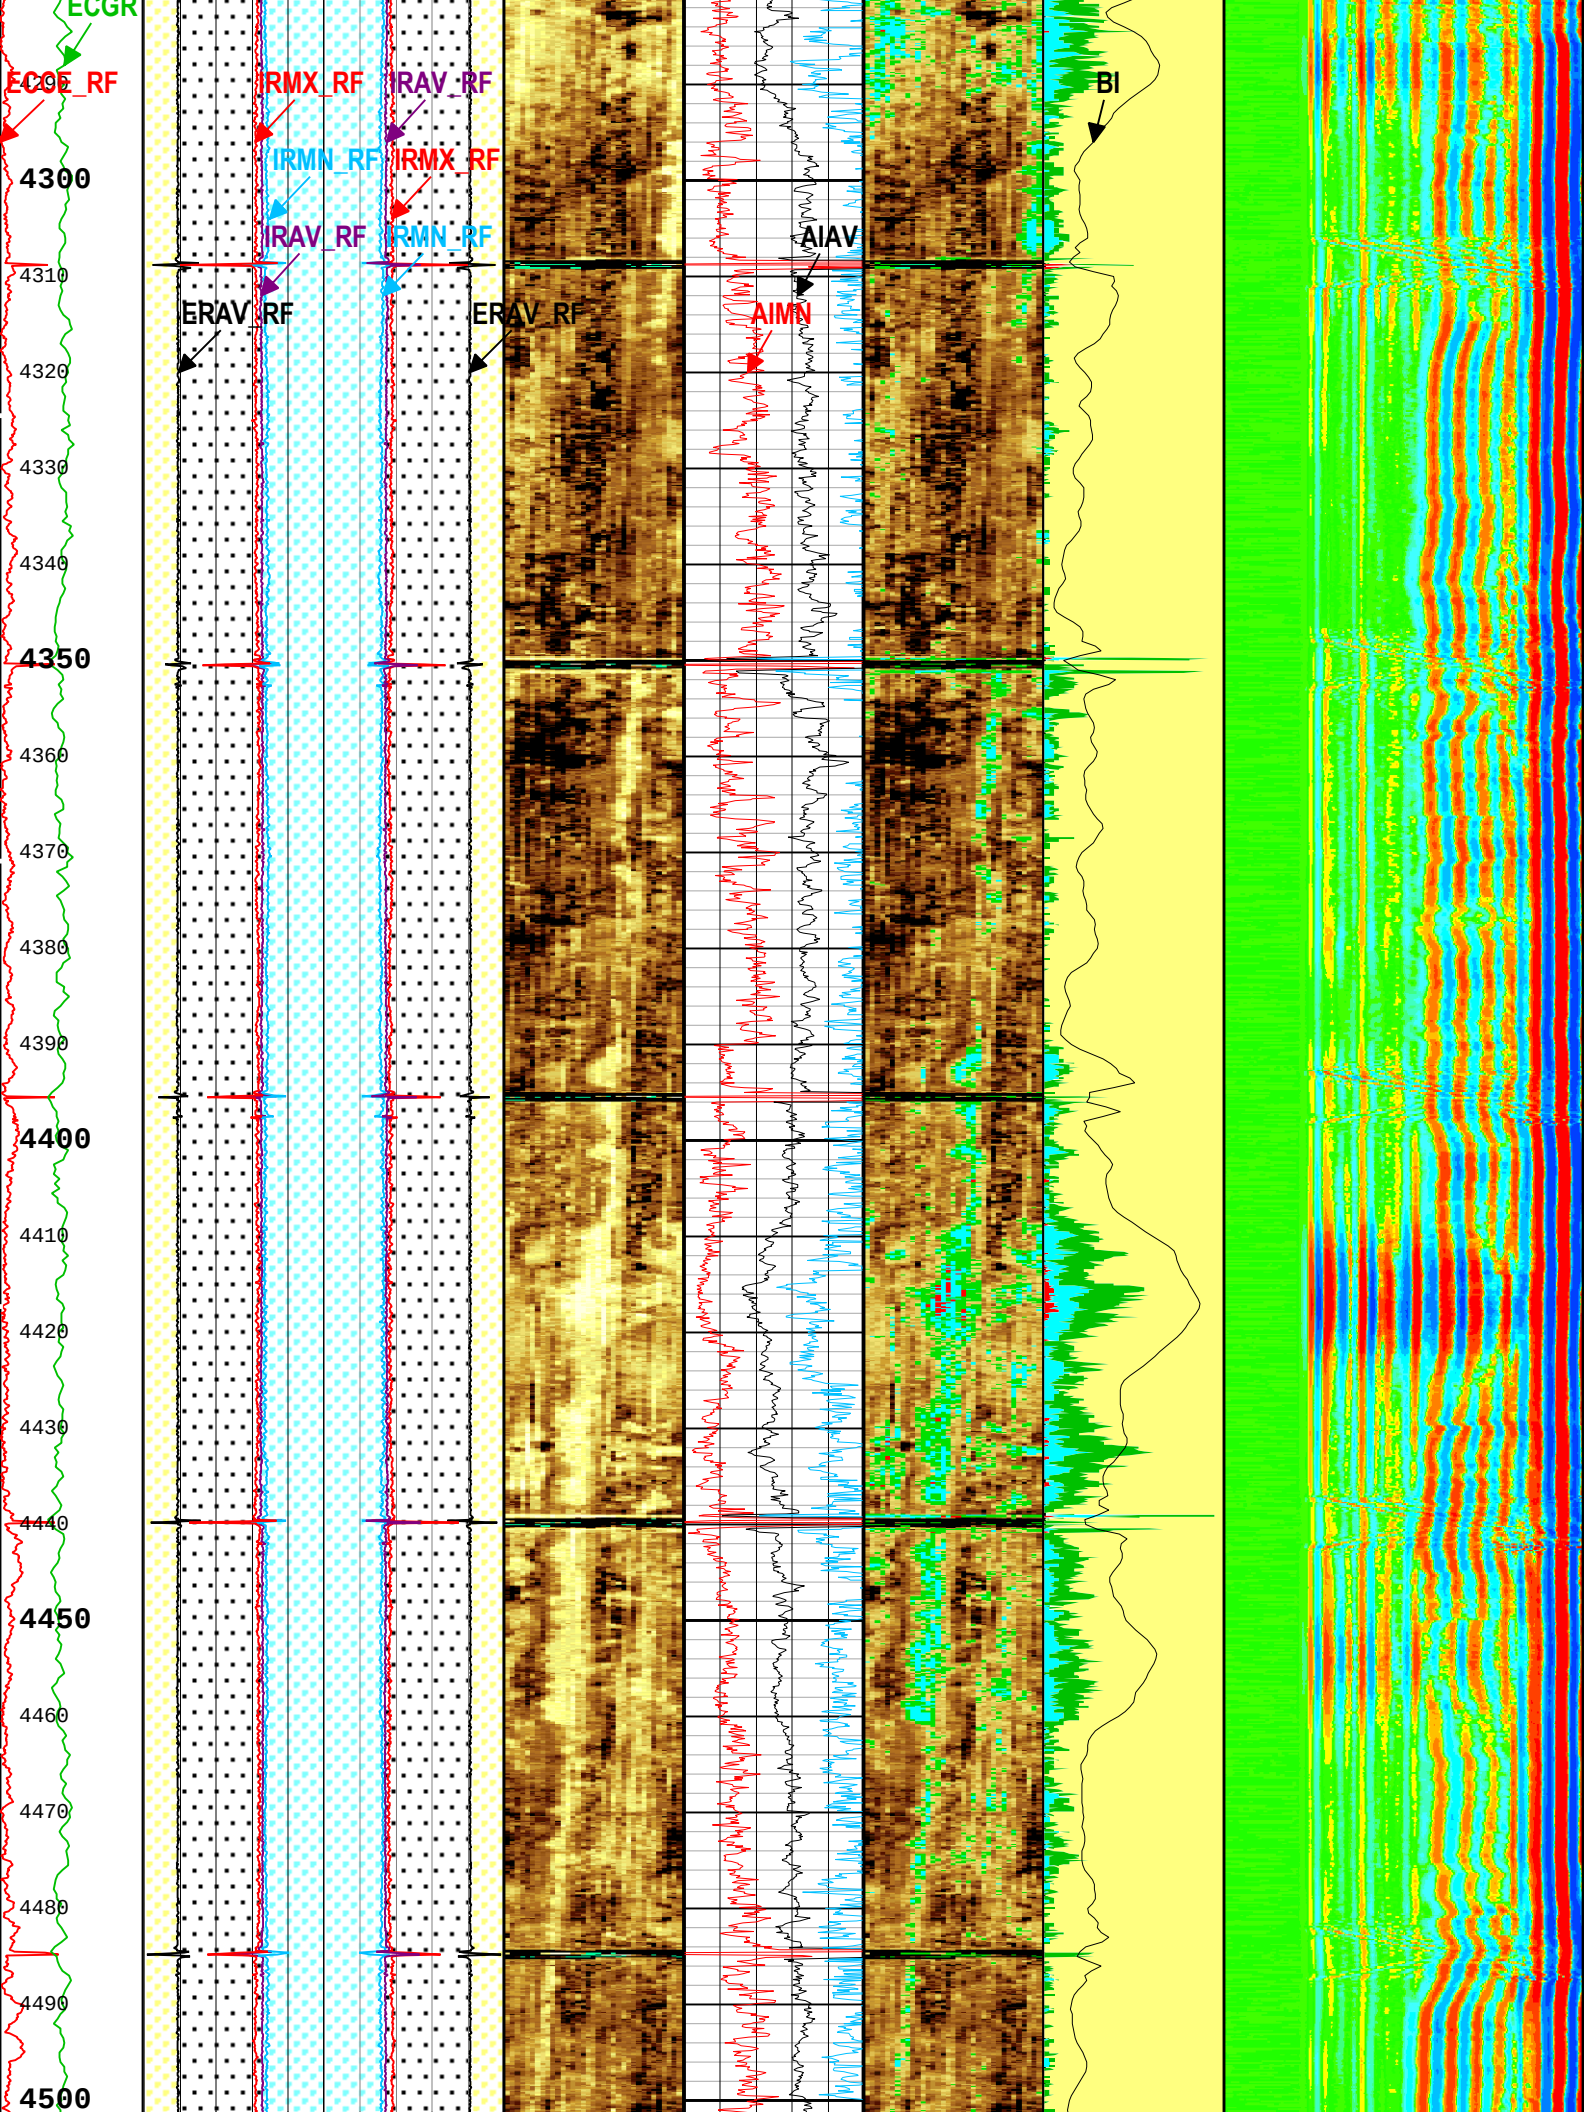
ECGR
ECOE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
BI
AIAV
ERAV_RF
ERAV_RF
AIMN
4300
4310
4320
4330
4340
4350
4360
4370
4380
4390
4400
4410
4420
4430
4440
4450
4460
4470
4480
4490
4500

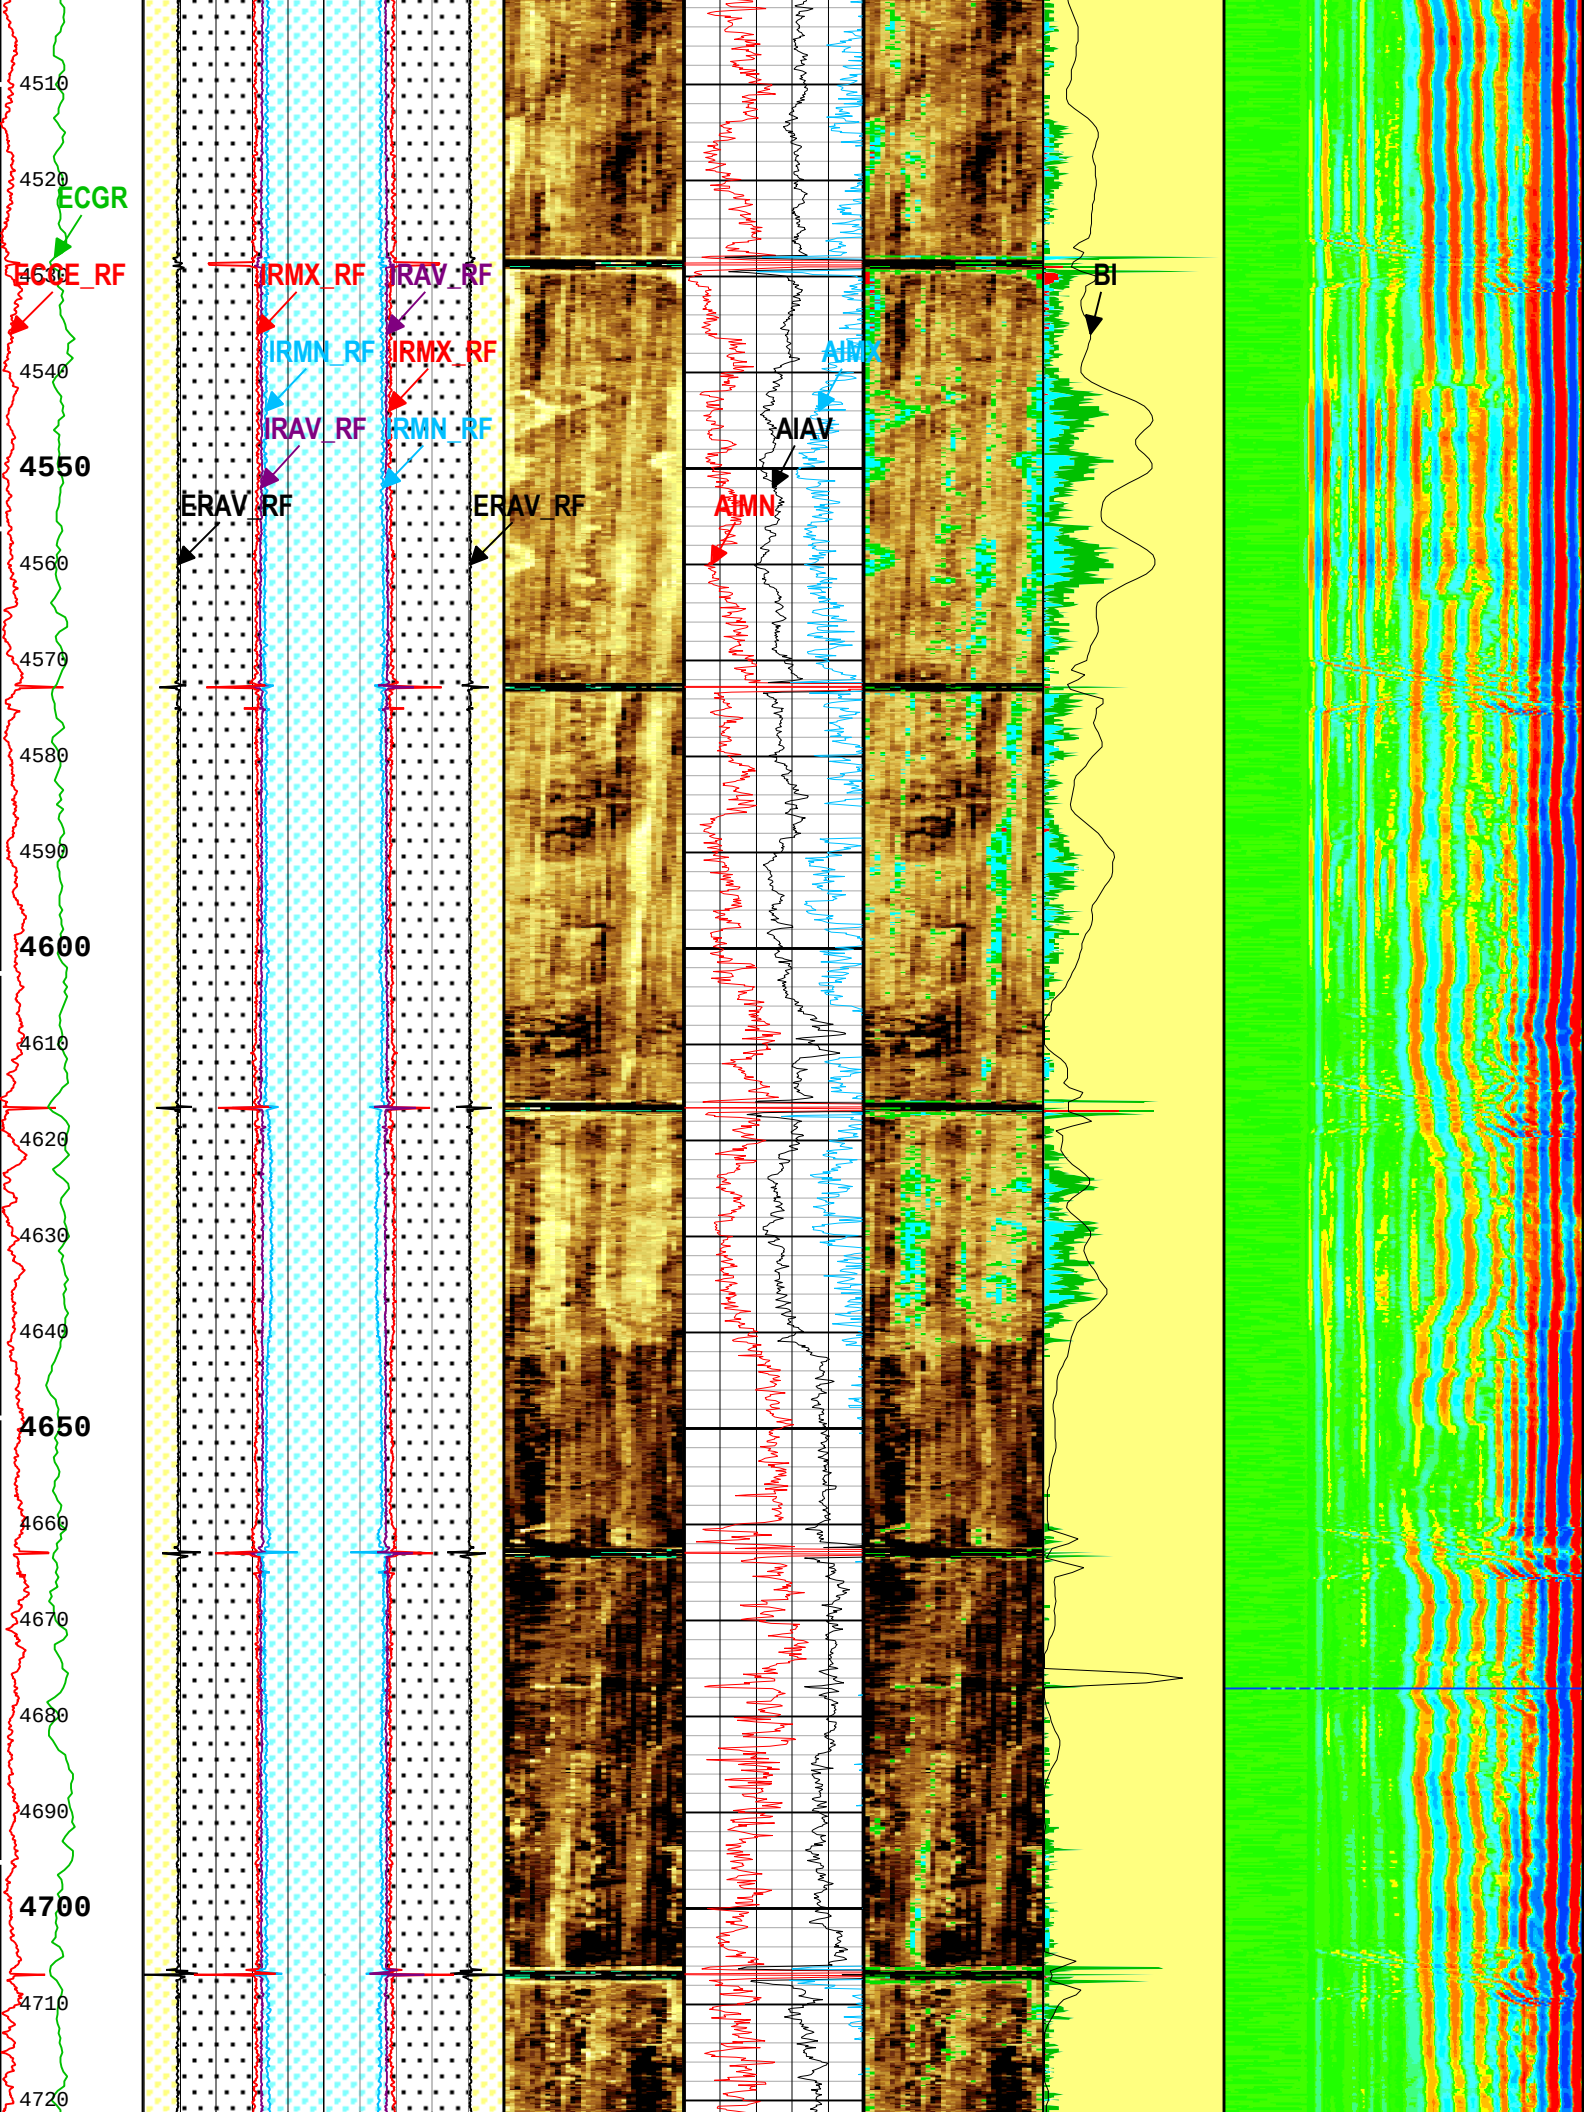
4510
4520
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
BI
AIMX
AIAV
AIMN
4540
4550
ERAV_RF
ERAV_RF
4560
4570
4580
4590
4600
4610
4620
4630
4640
4650
4660
4670
4680
4690
4700
4710
4720

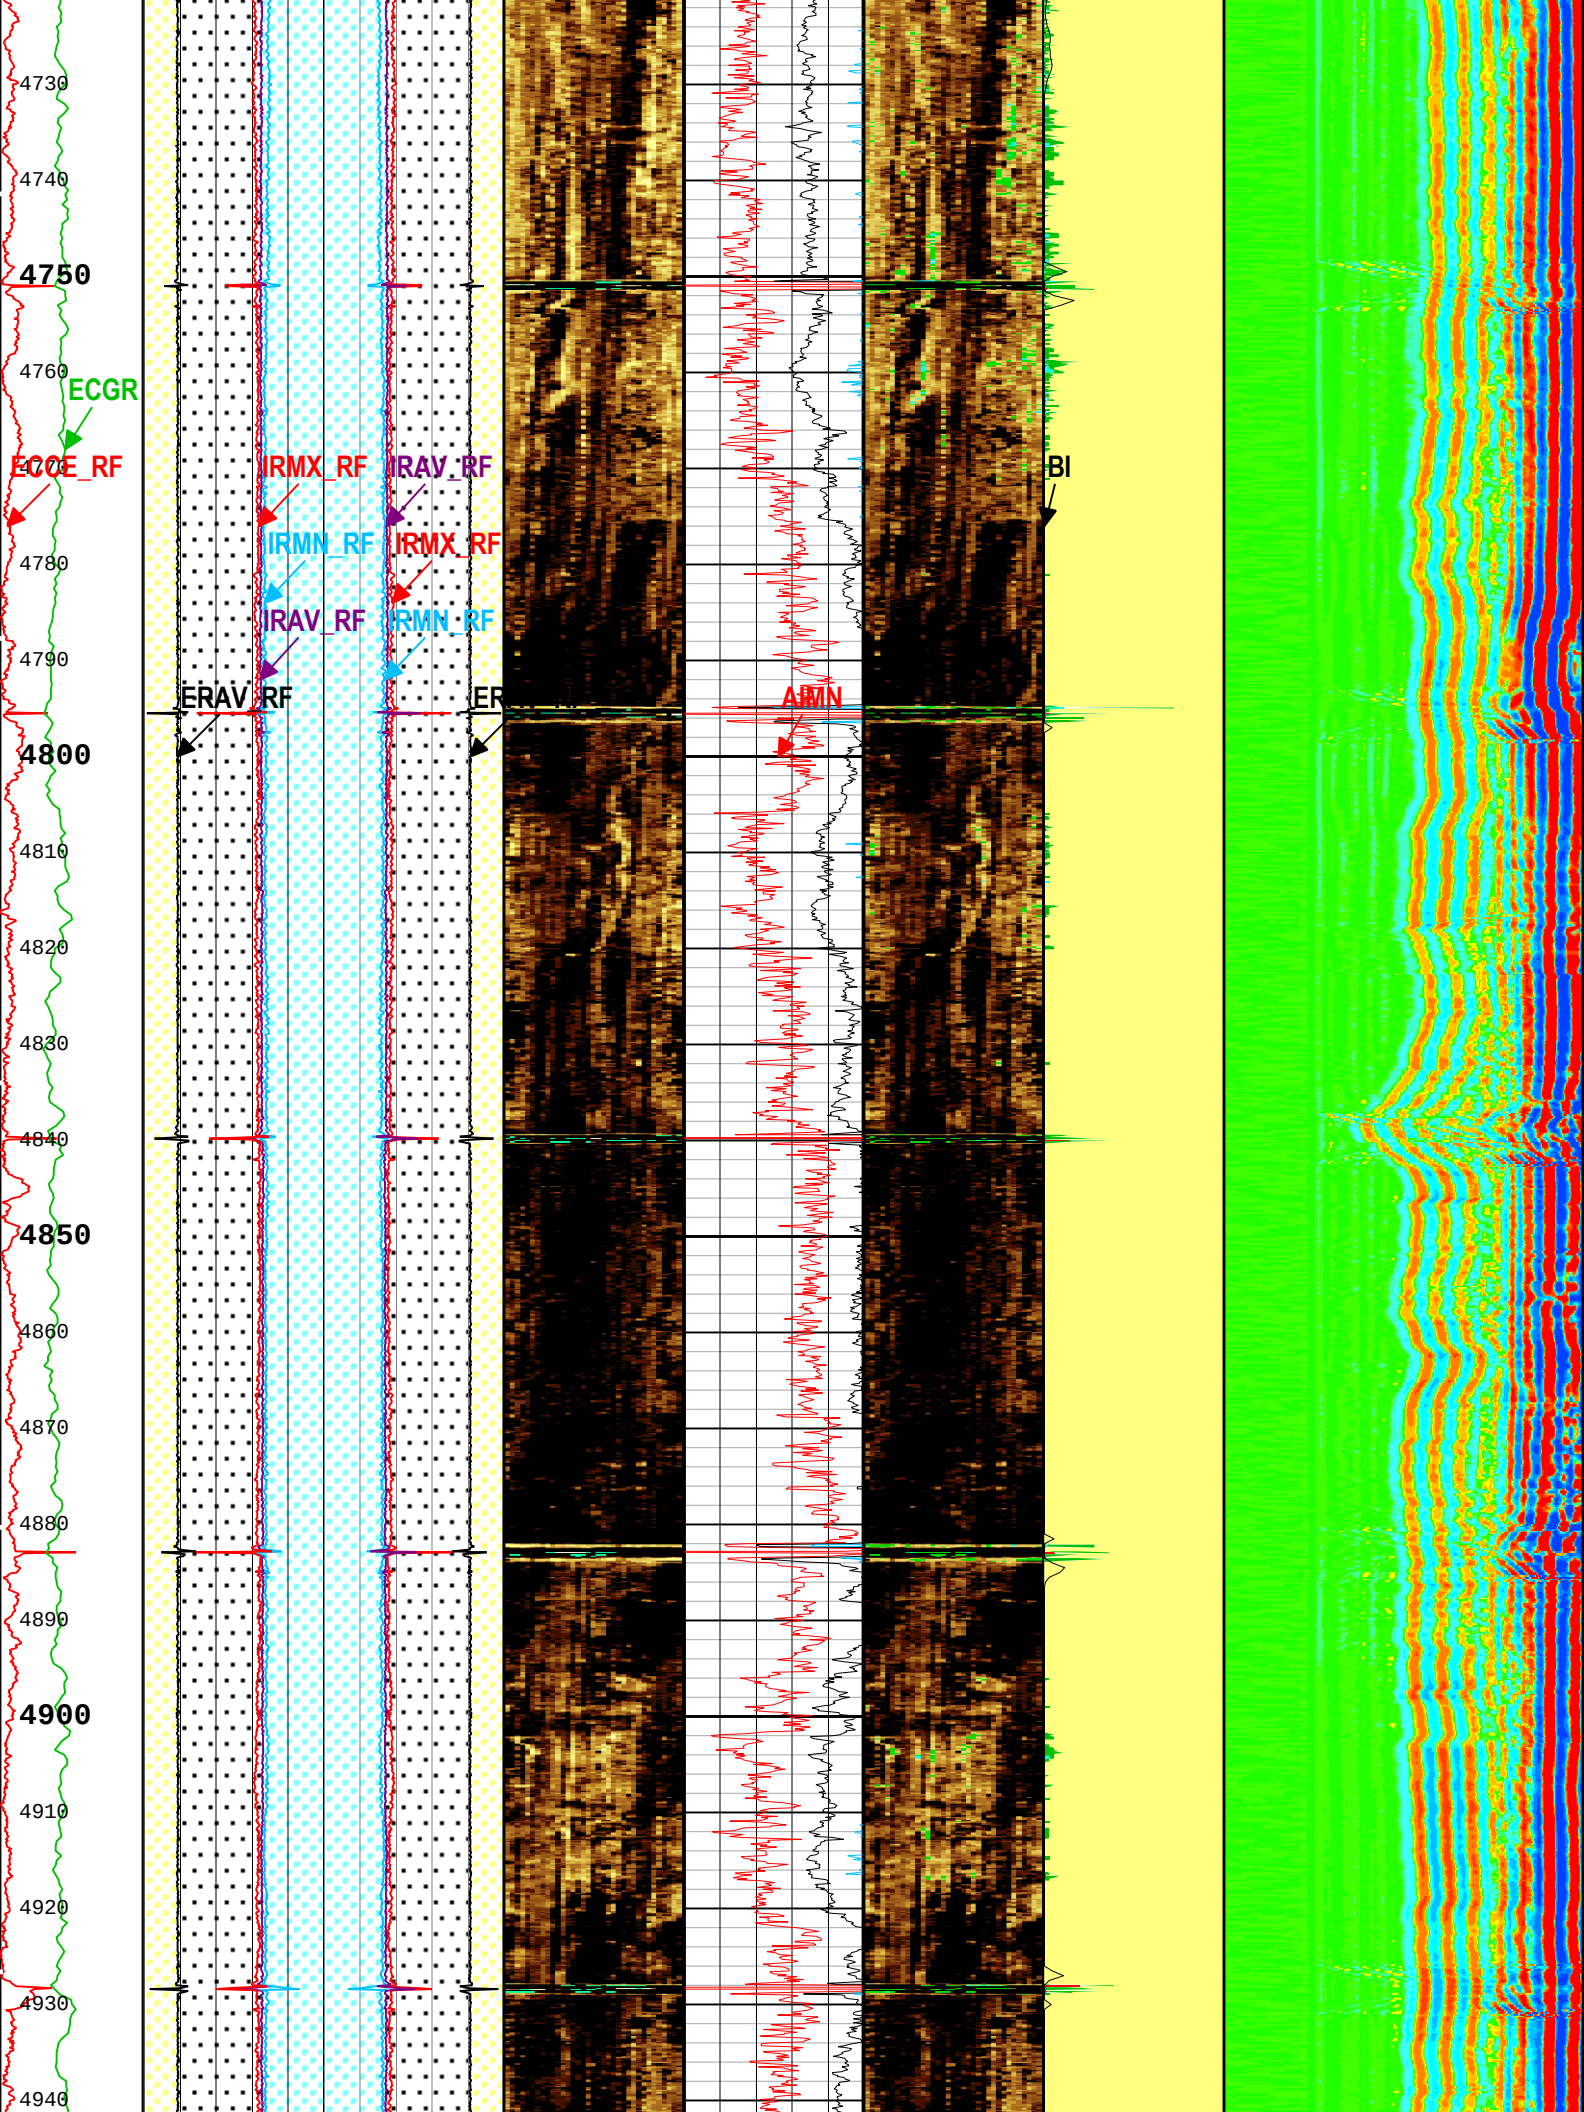
4730
4740
4750
4760
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
4780
4790
ERAV_RF
ER
AIMN
BI
4800
4810
4820
4830
4840
4850
4860
4870
4880
4890
4900
4910
4920
4930
4940

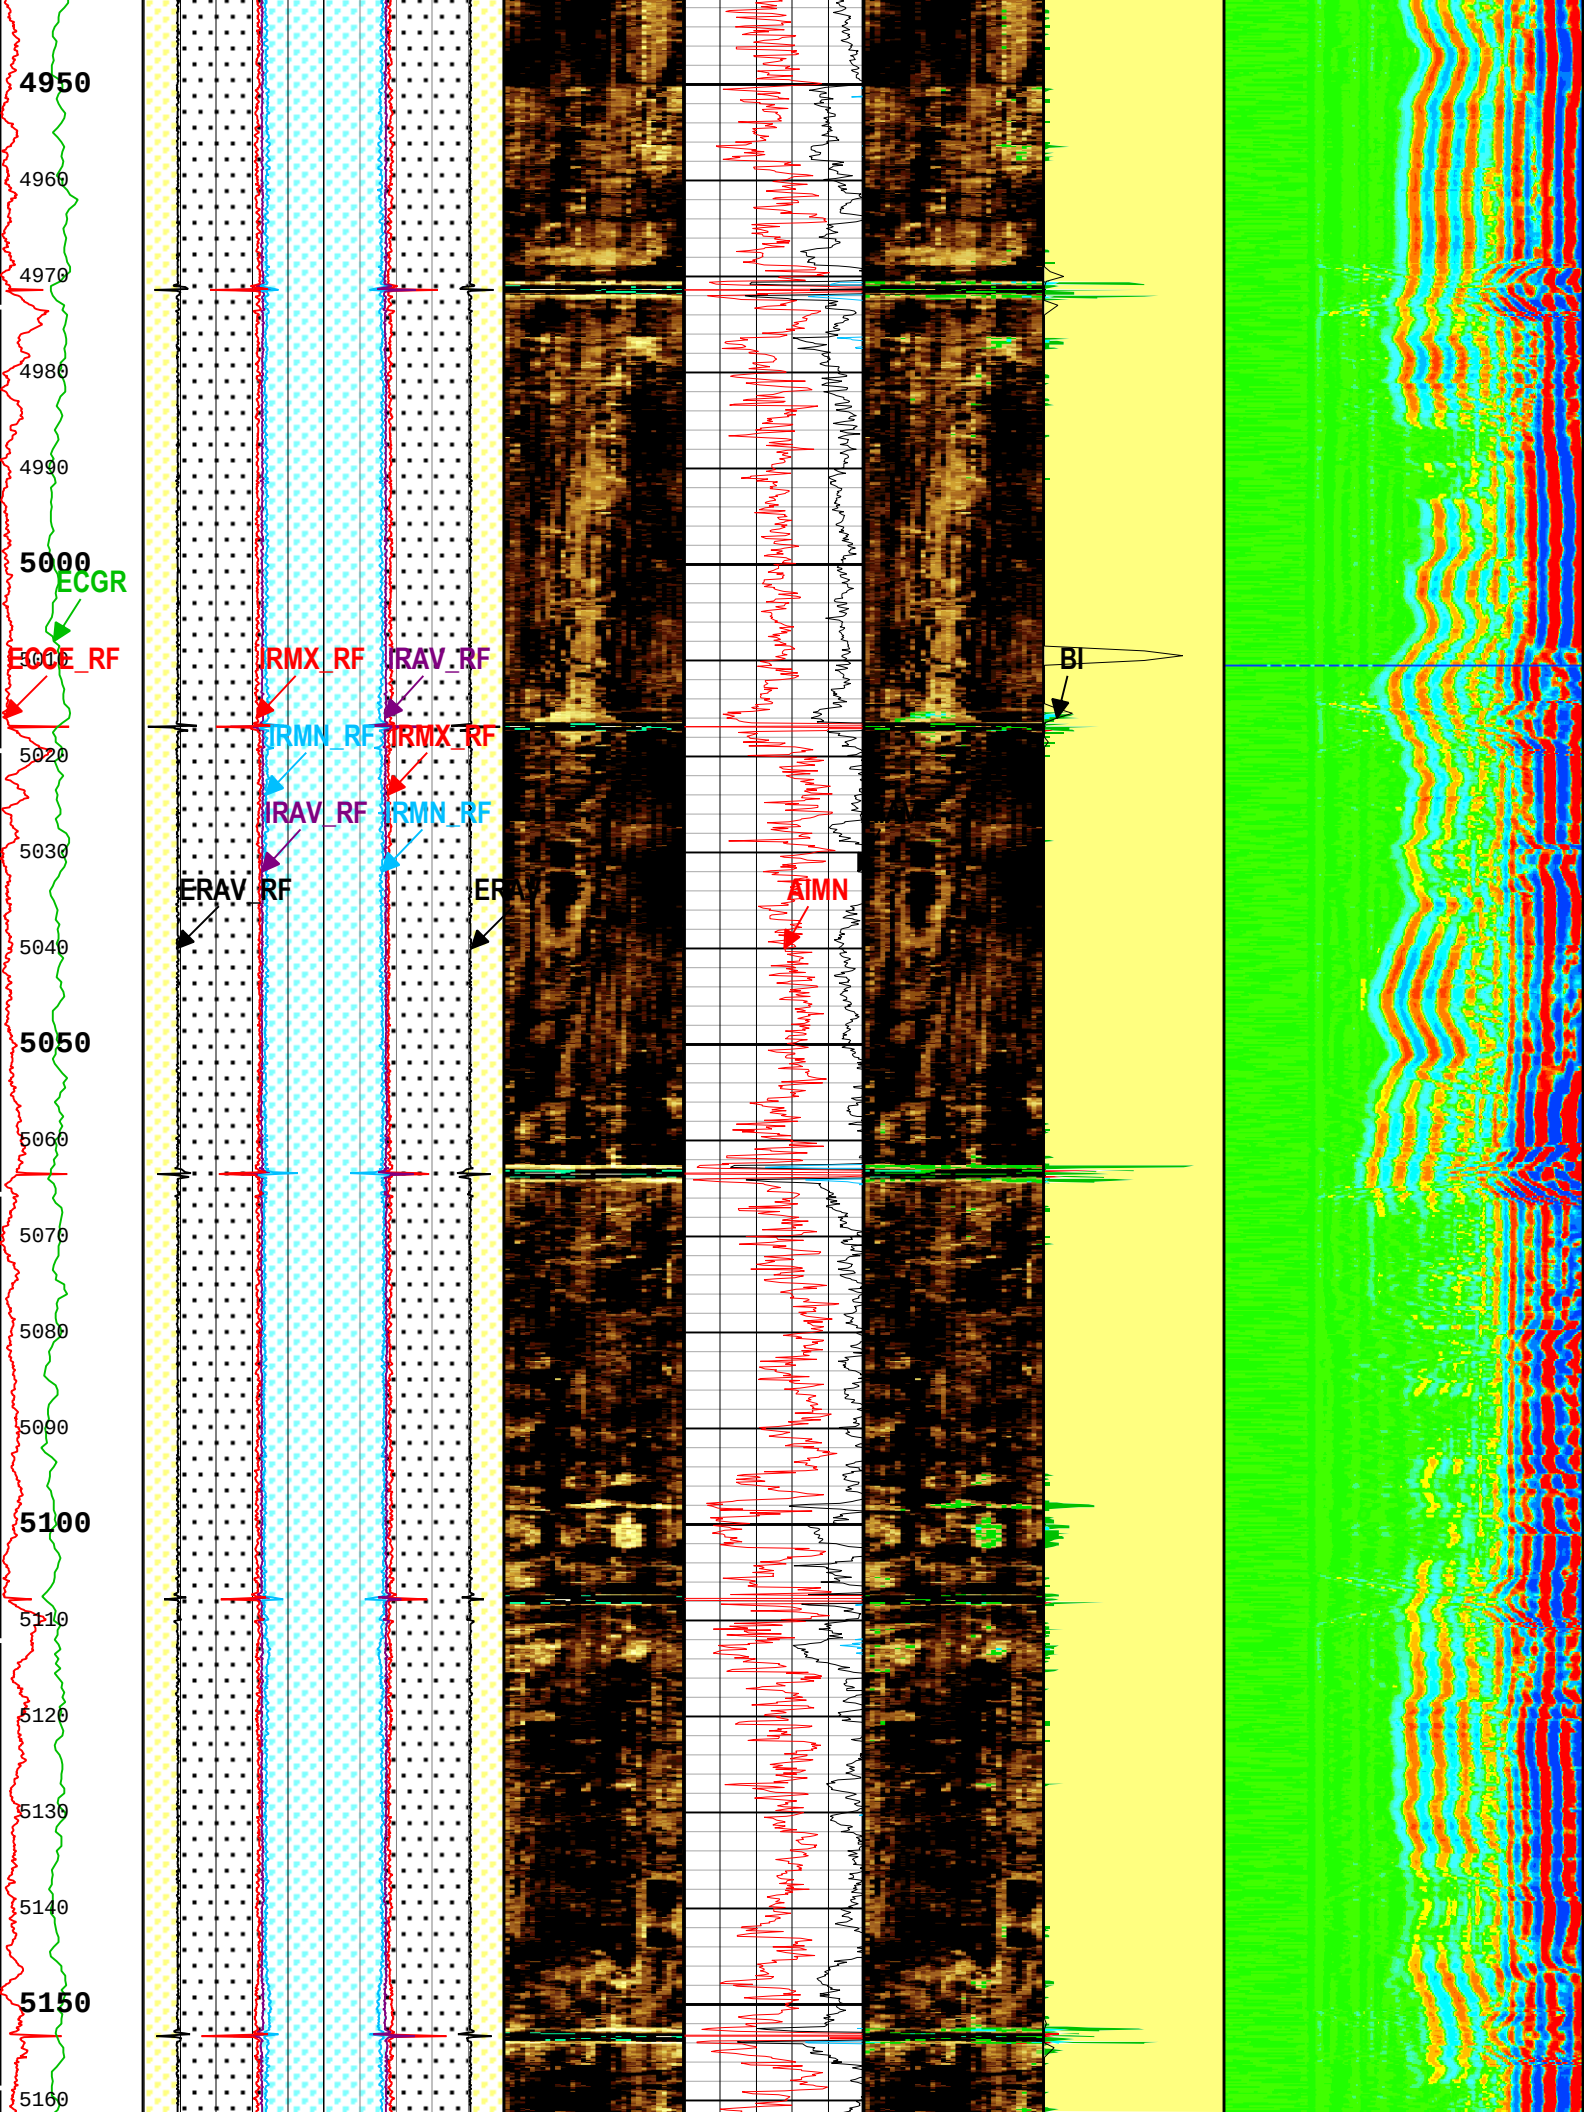
4950
4960
4970
4980
4990
5000
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
5020
5030
ERAV_RF
ER
AIMN
BI
5040
5050
5060
5070
5080
5090
5100
5110
5120
5130
5140
5150
5160

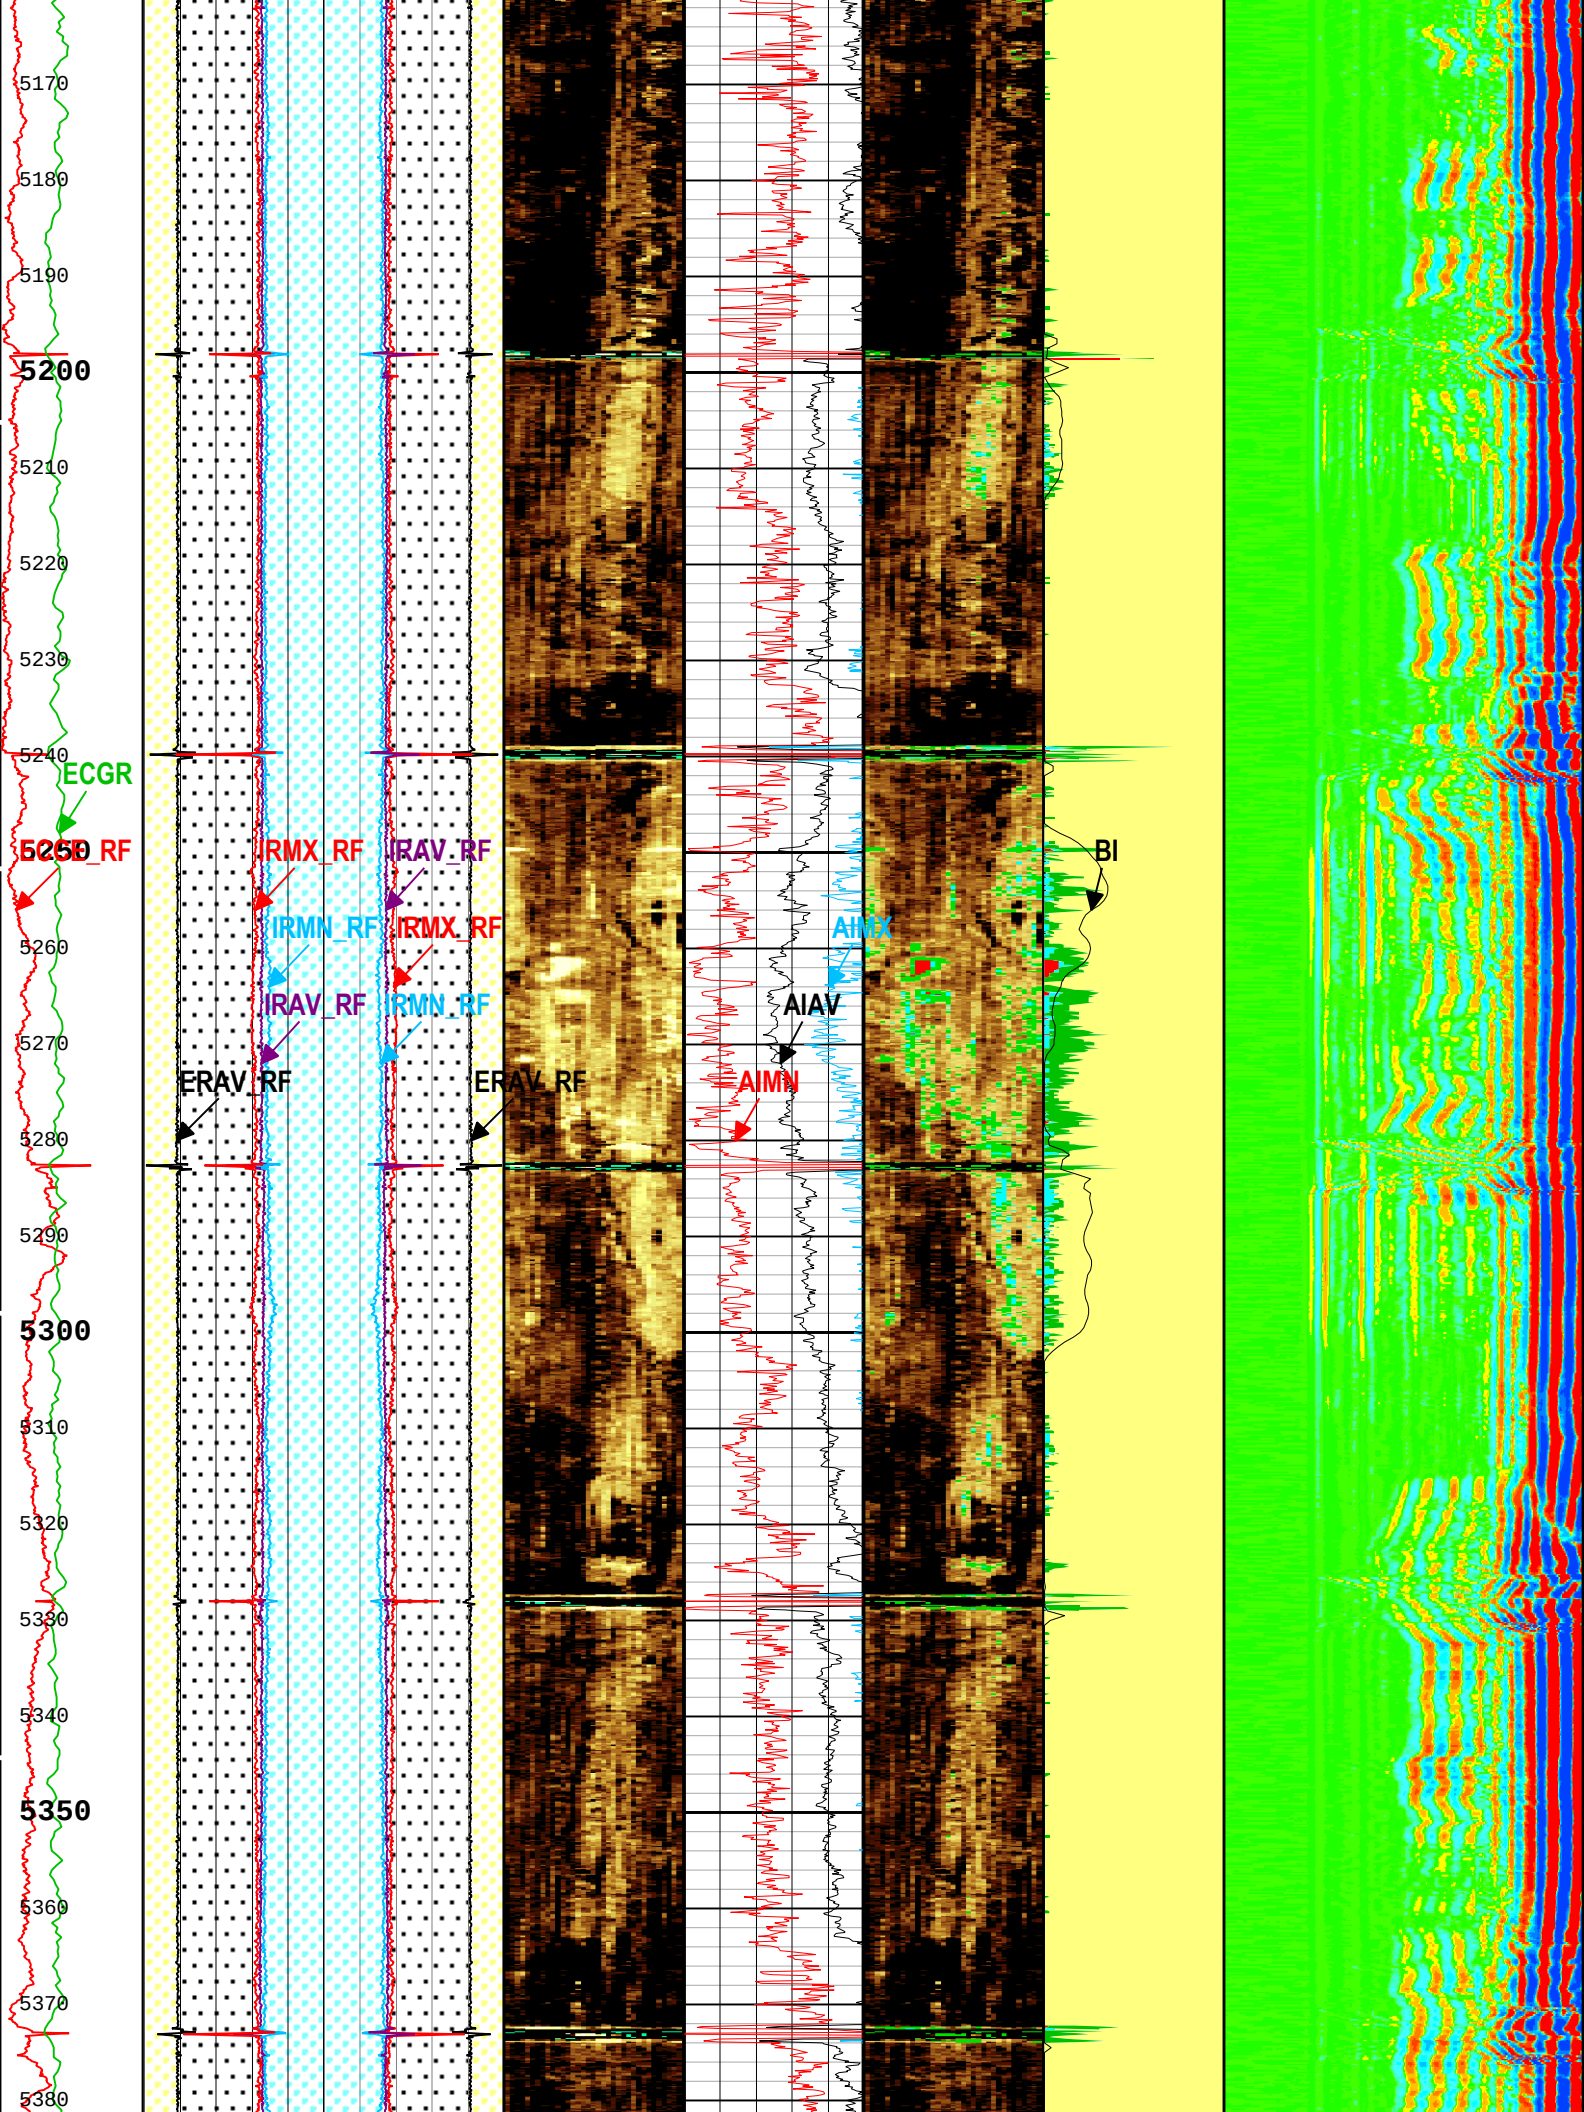
5170
5180
5190
5200
5210
5220
5230
5240
ECGR
5250
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI
5260
5270
5280
5290
5300
5310
5320
5330
5340
5350
5360
5370
5380

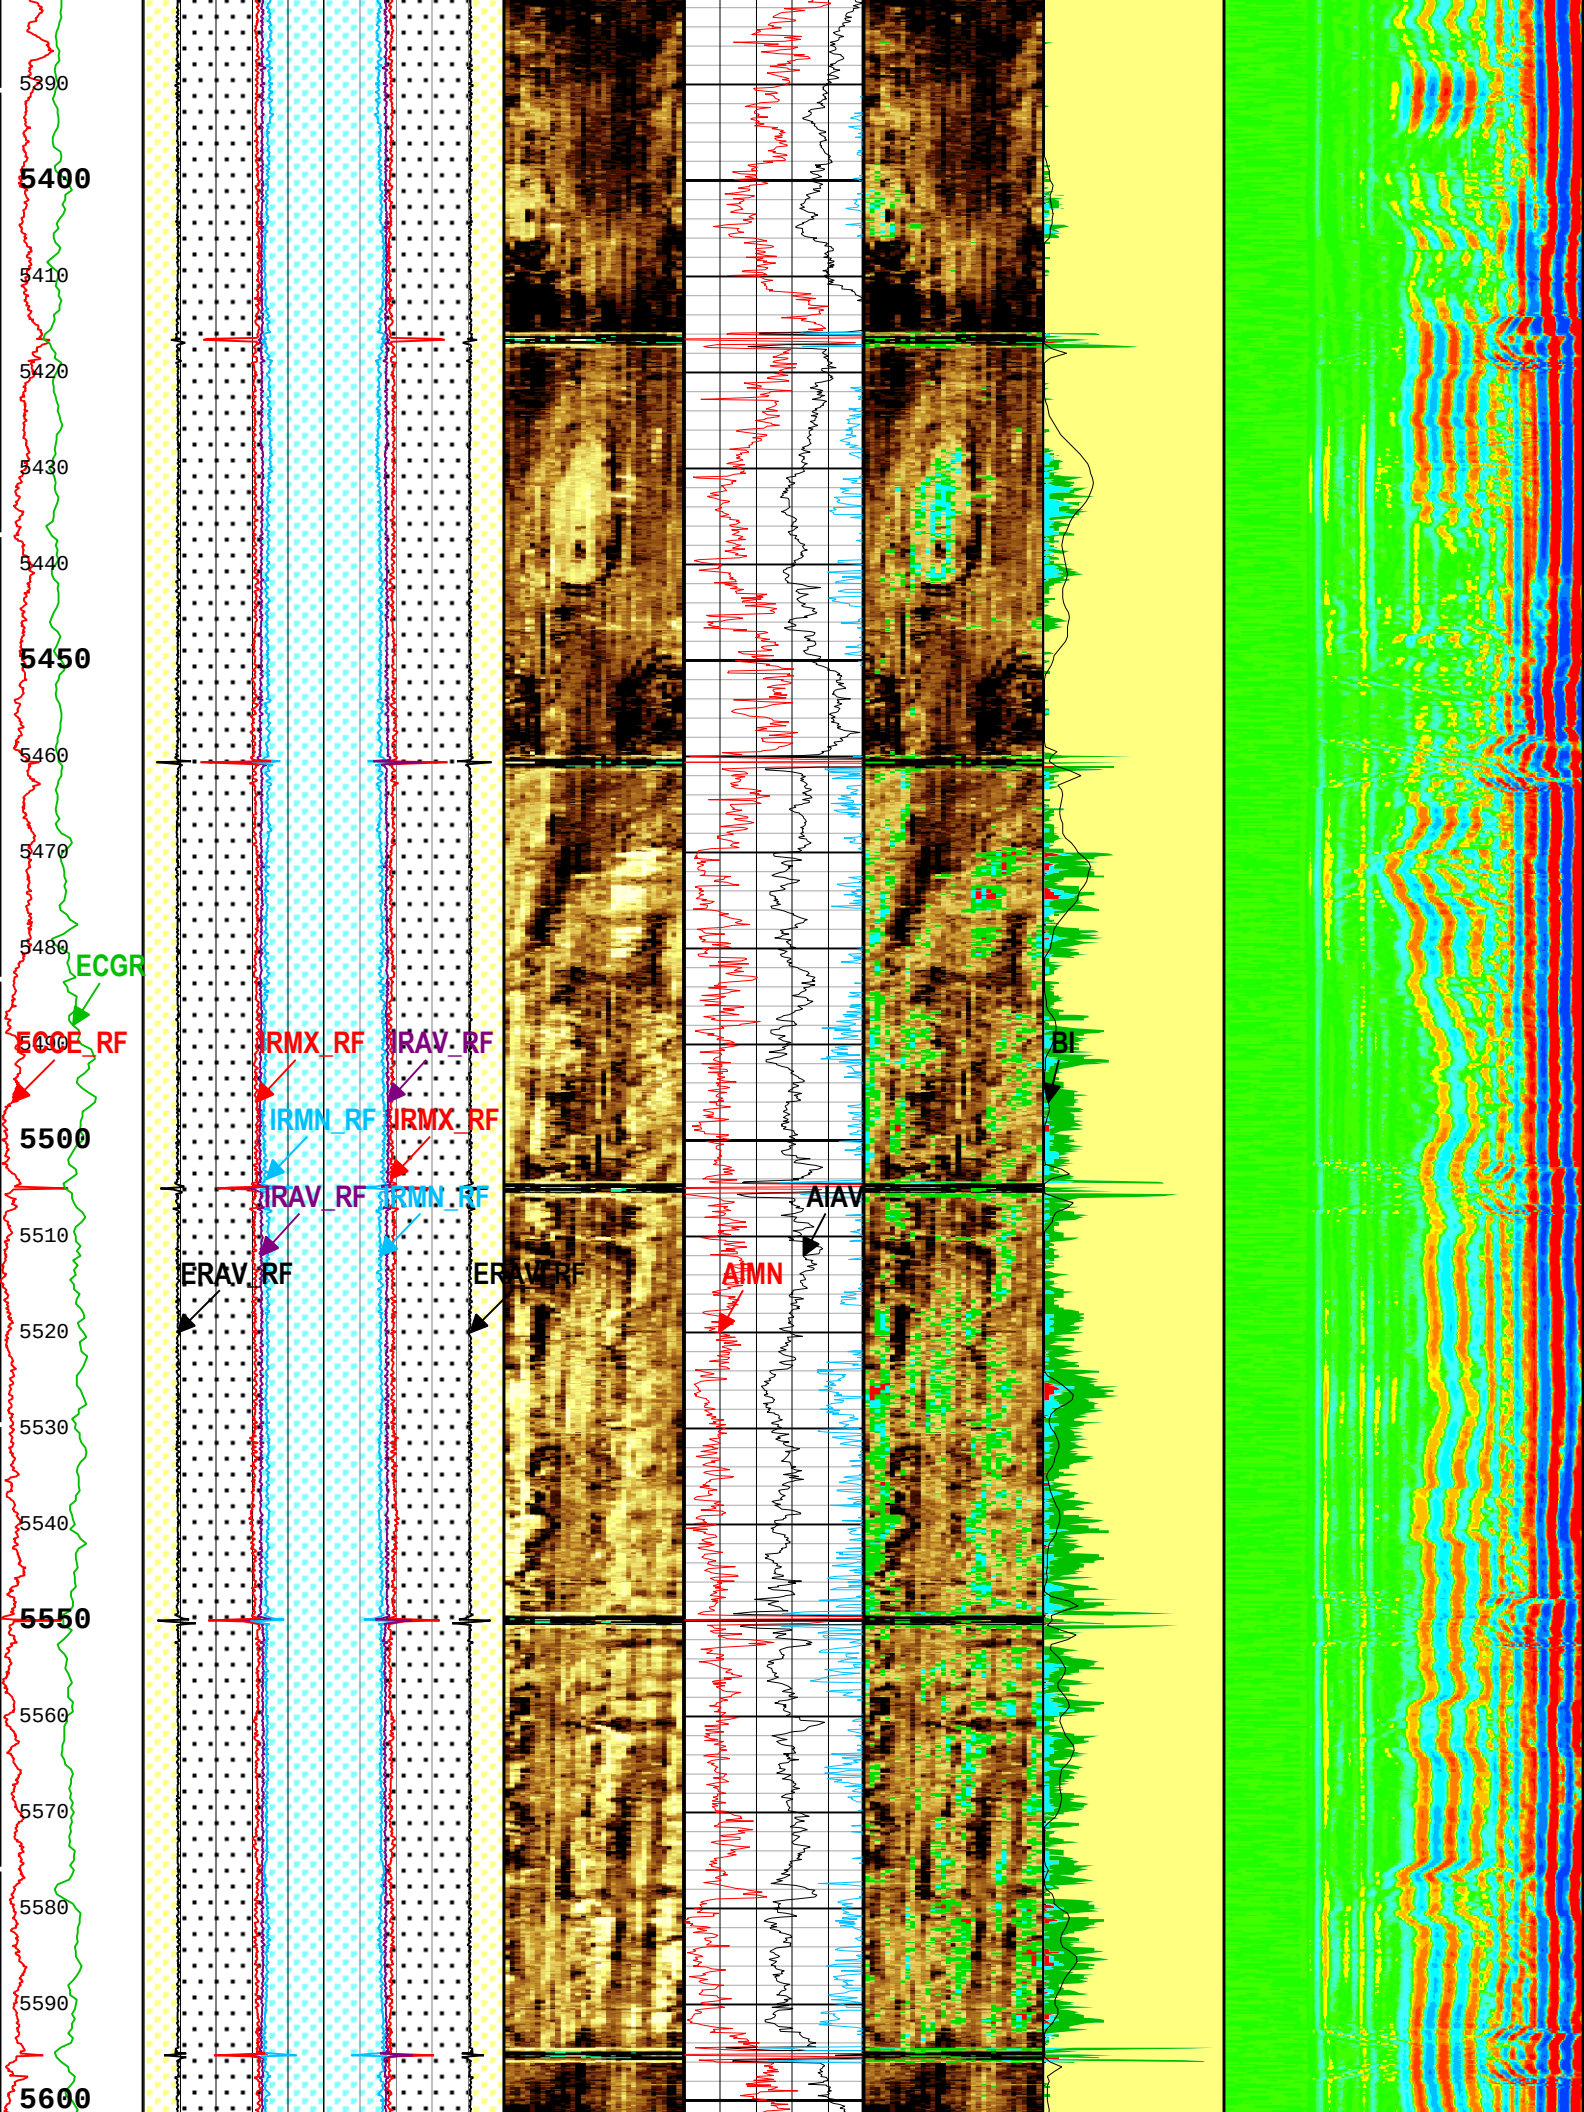
5390
5400
5410
5420
5430
5440
5450
5460
5470
5480
5490
5500
5510
5520
5530
5540
5550
5560
5570
5580
5590
5600
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIAV
AIMN
BI

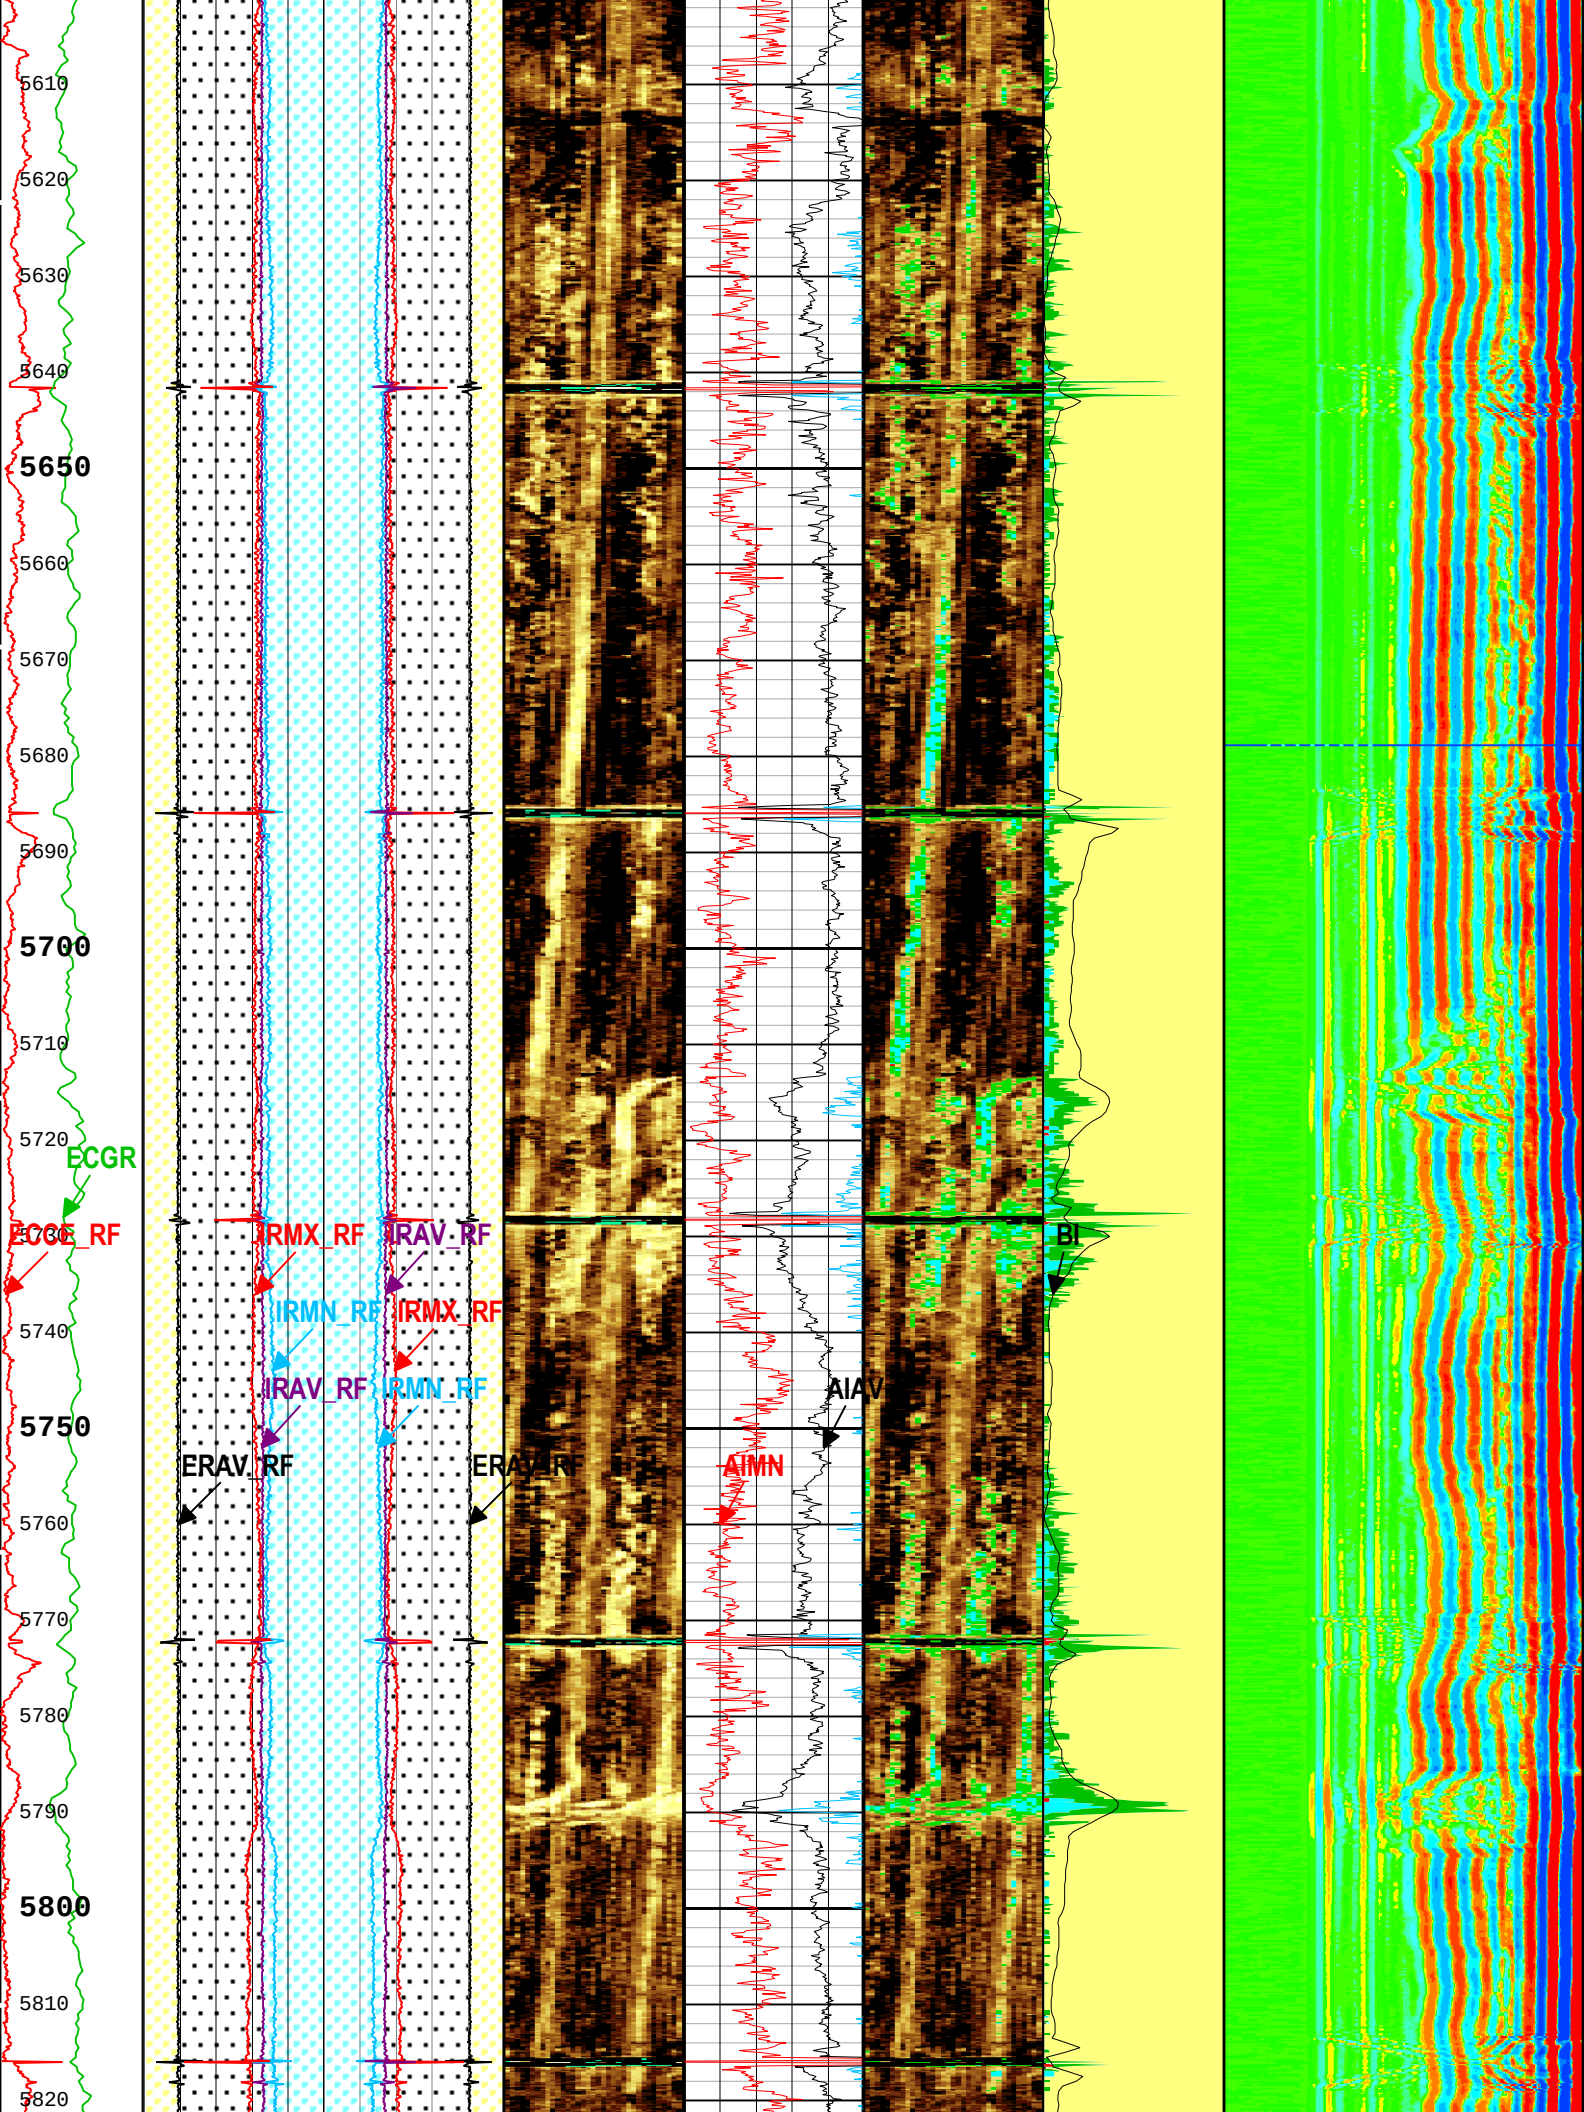
5610
5620
5630
5640
5650
5660
5670
5680
5690
5700
5710
5720
5730
5740
5750
5760
5770
5780
5790
5800
5810
5820
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIAV
AIMN
BI

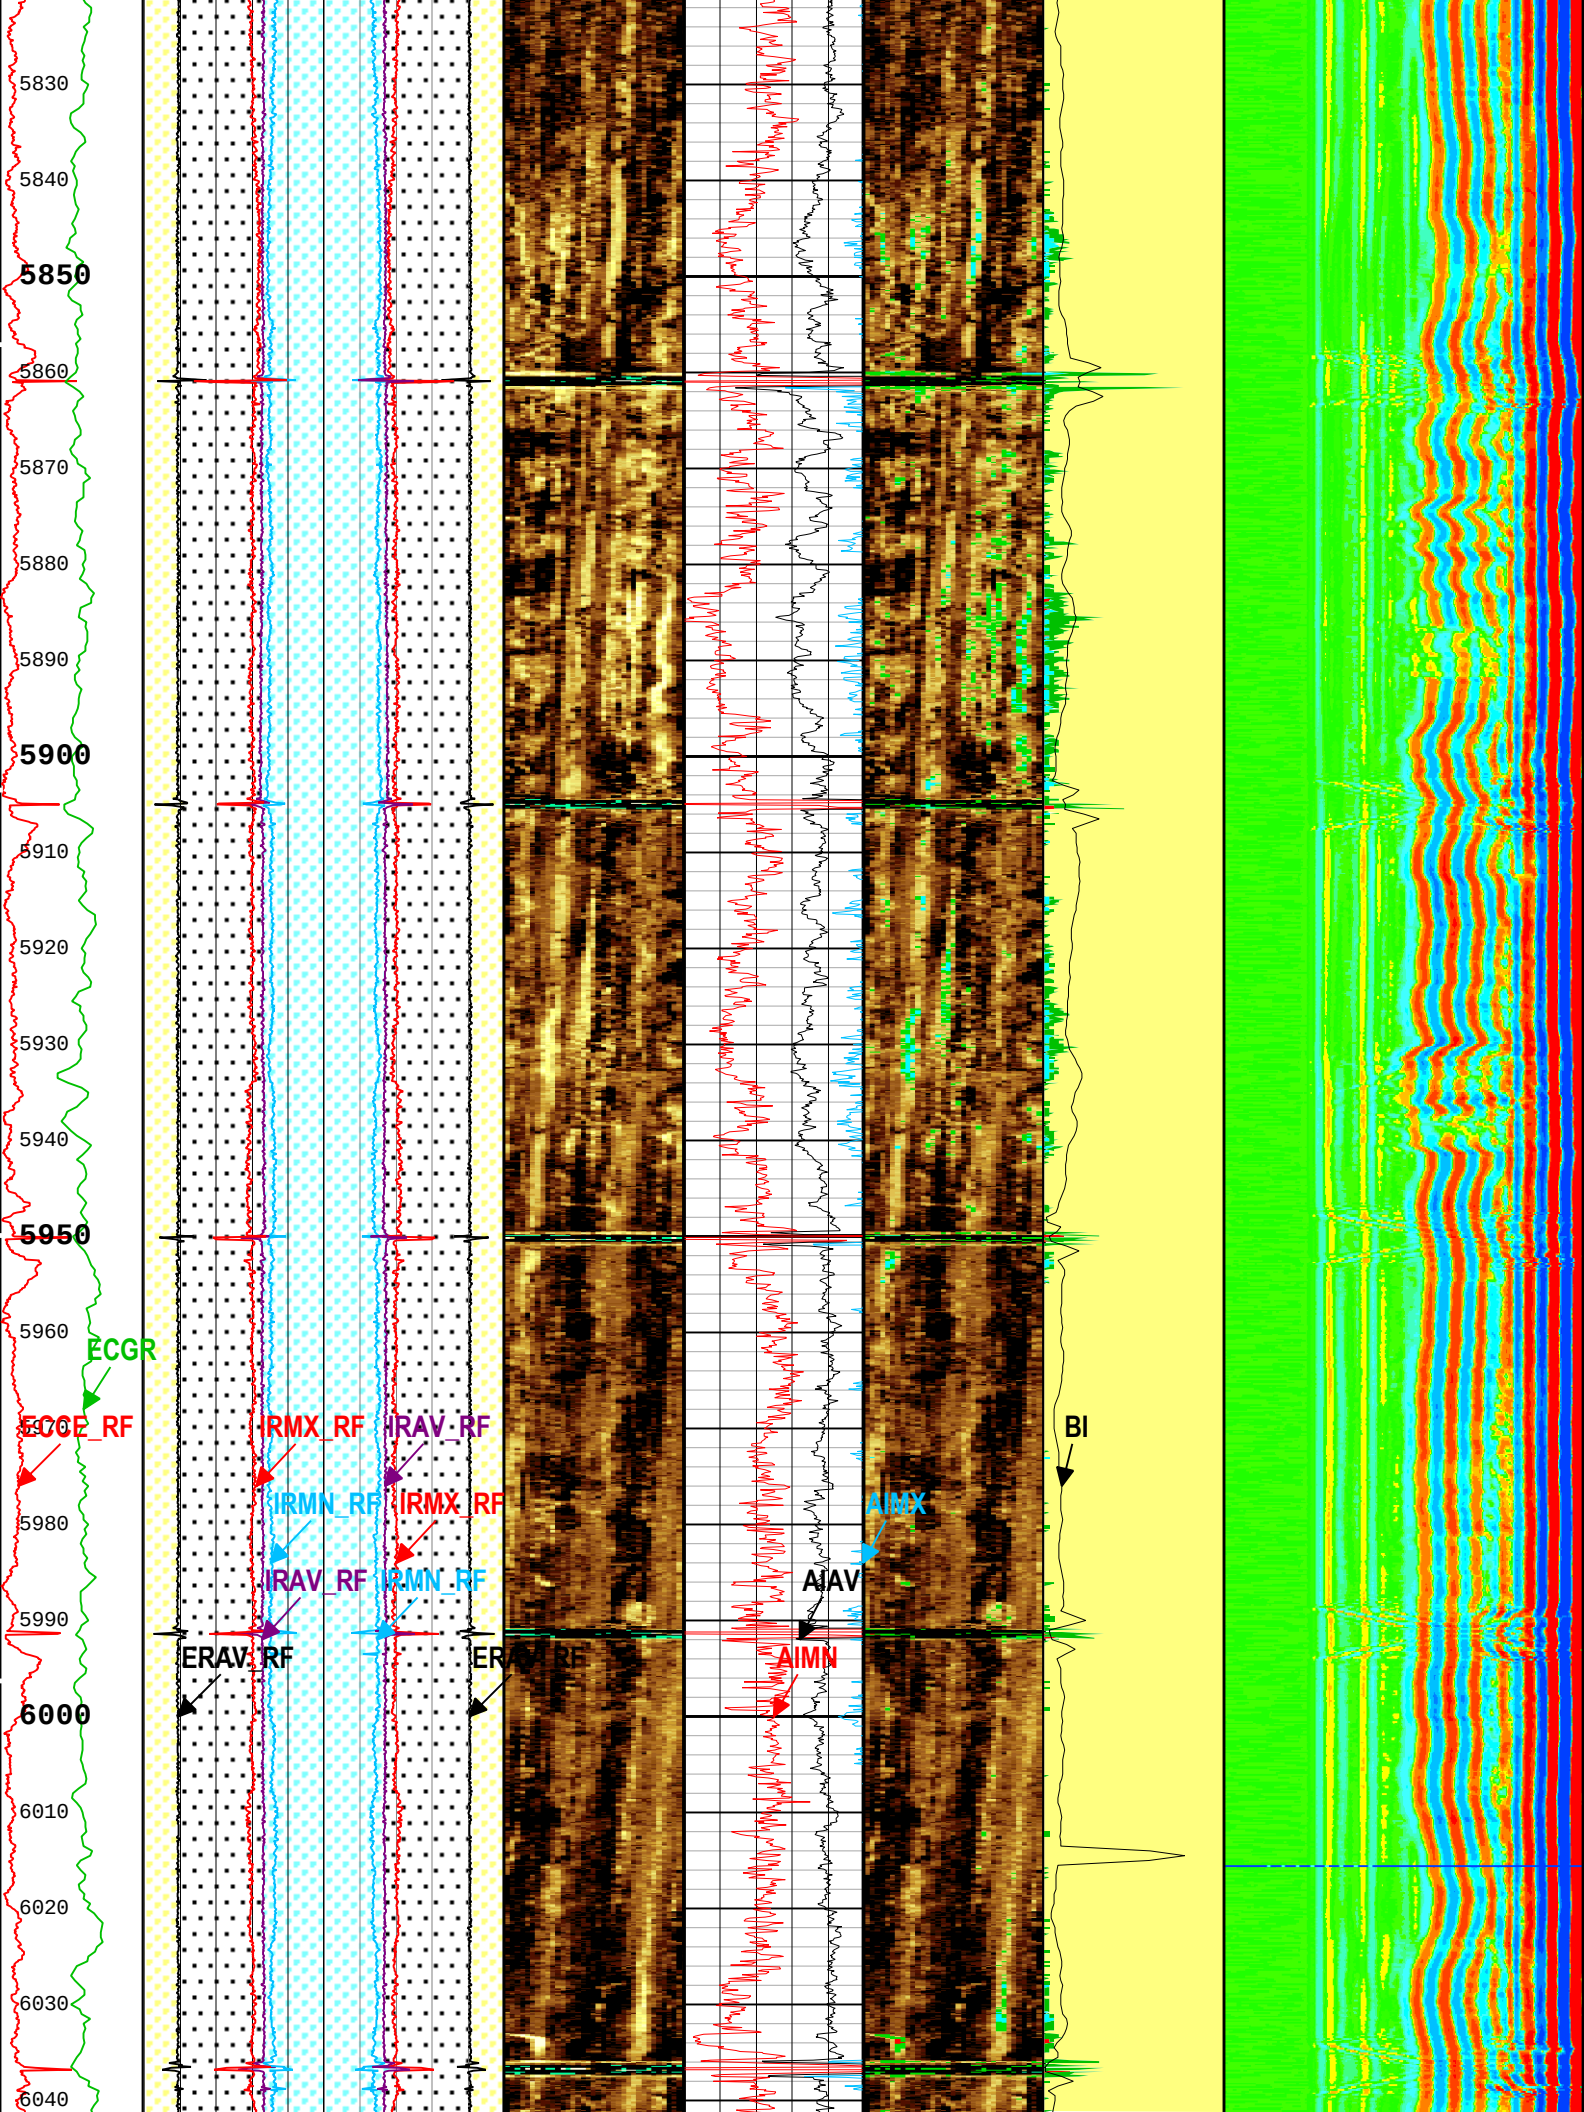
5830
5840
5850
5860
5870
5880
5890
5900
5910
5920
5930
5940
5950
5960
5970
5980
5990
6000
6010
6020
6030
6040
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN
BI

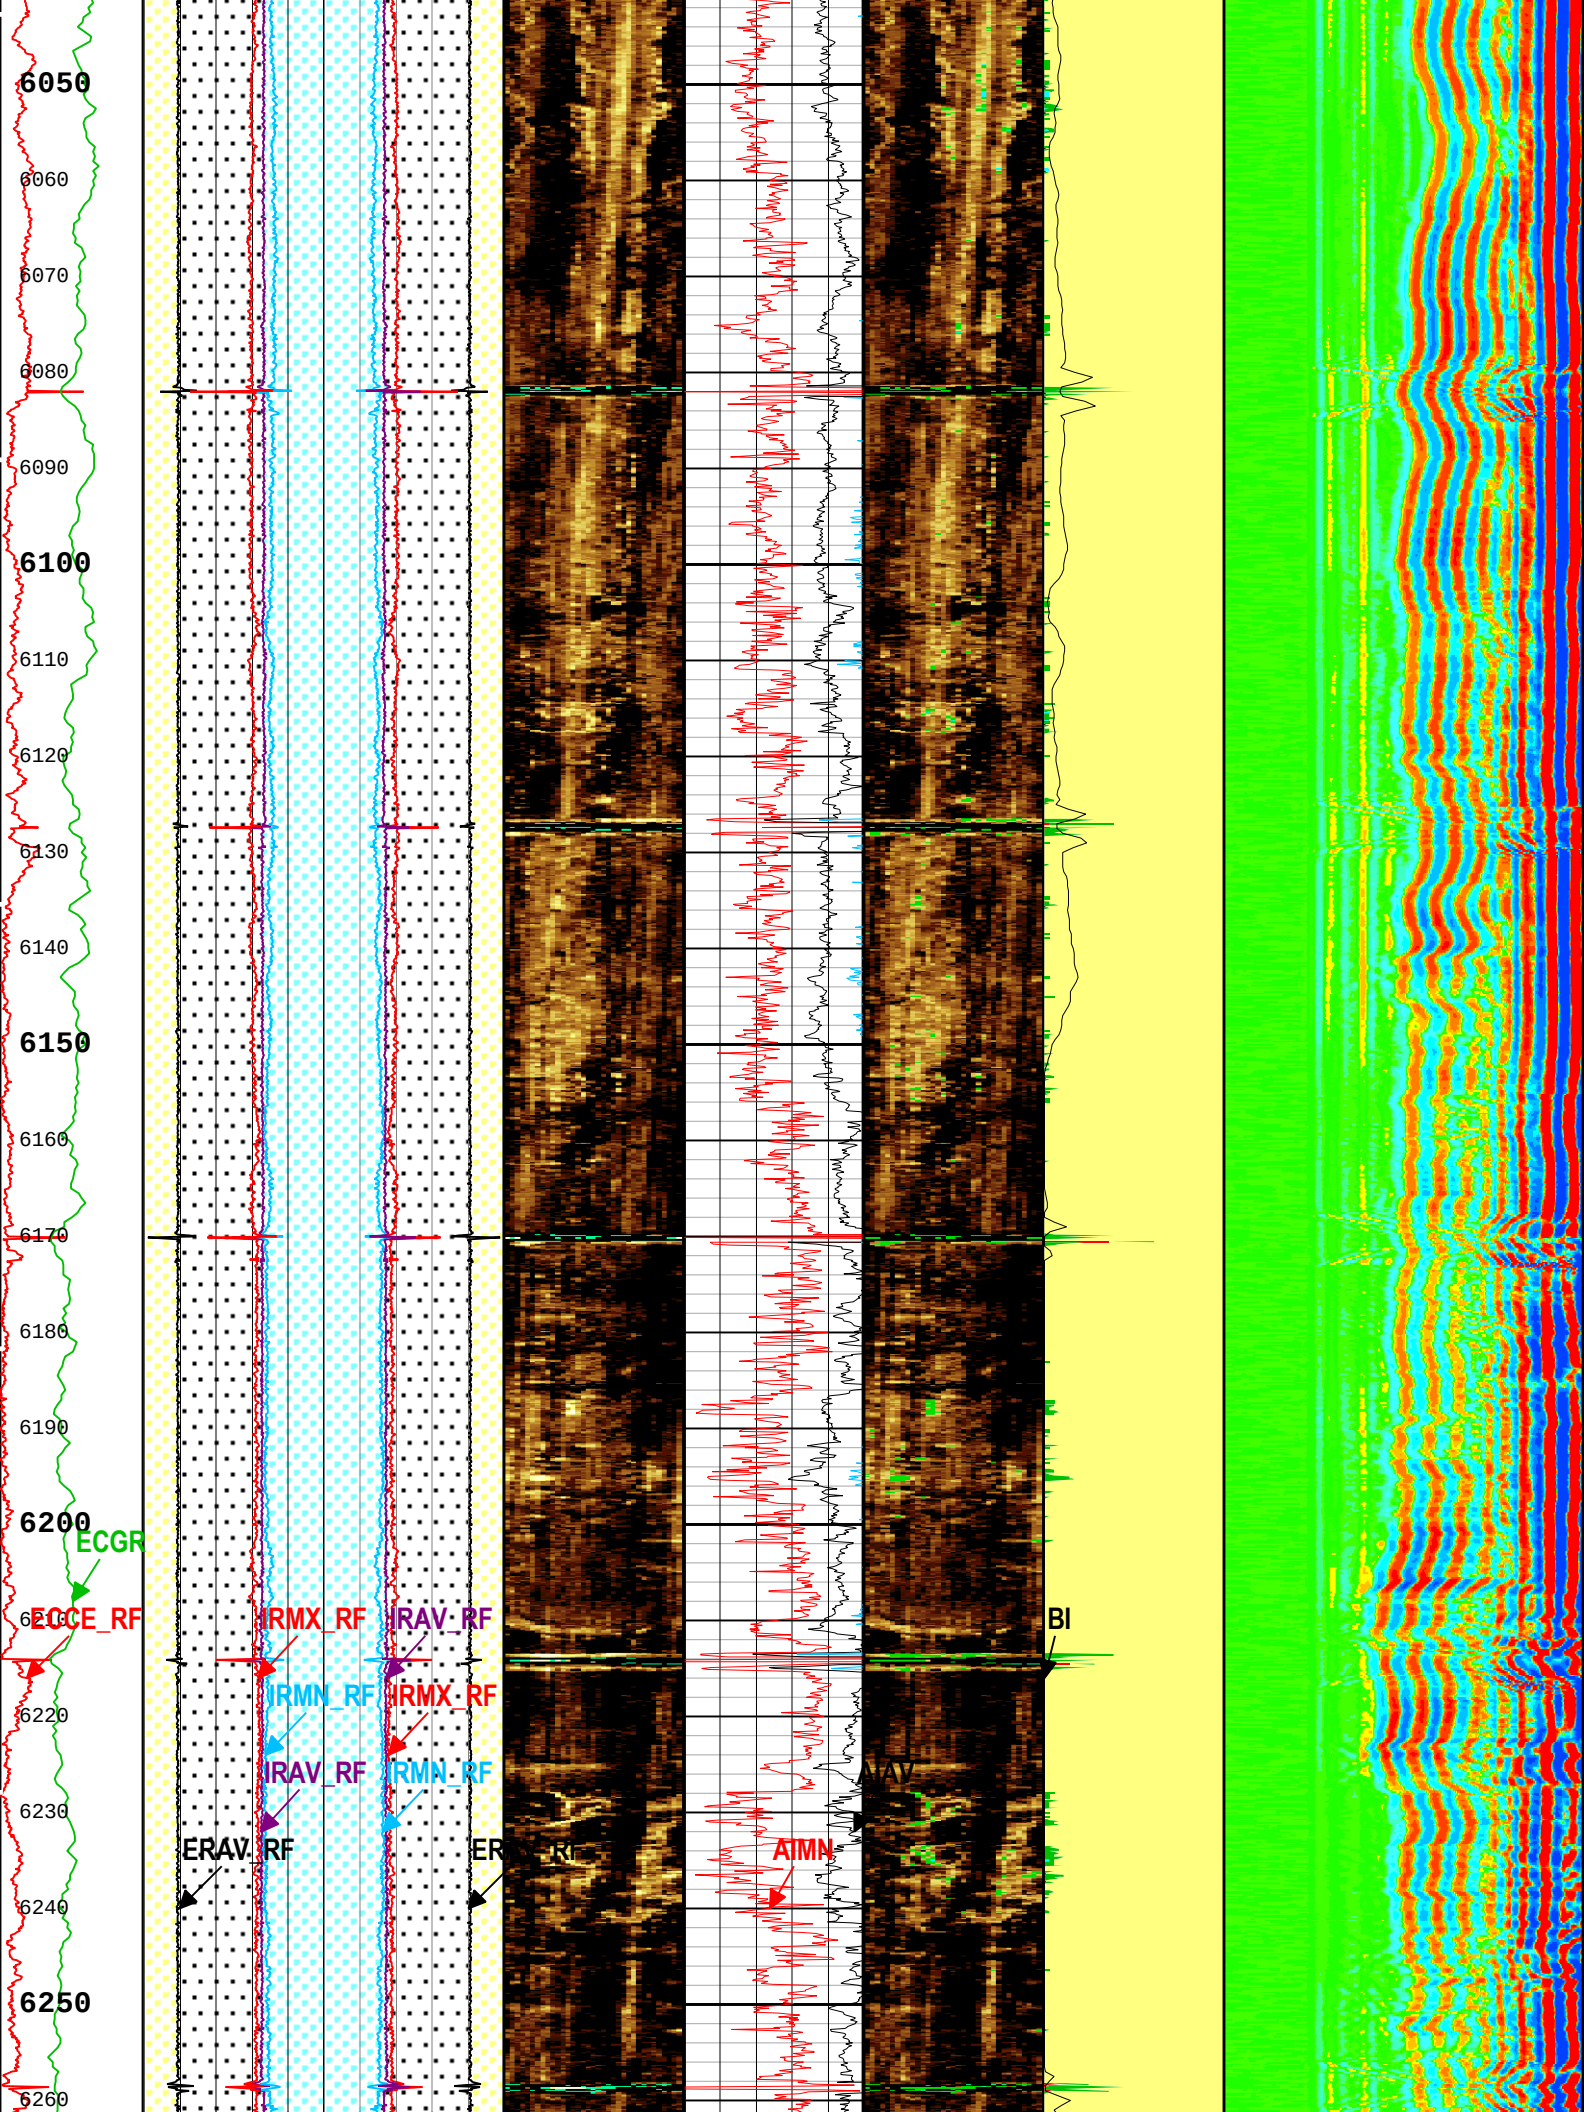
6050
6060
6070
6080
6090
6100
6110
6120
6130
6140
6150
6160
6170
6180
6190
6200
ECGR
ECCE_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ATMN
BI
6220
6230
6240
6250
6260

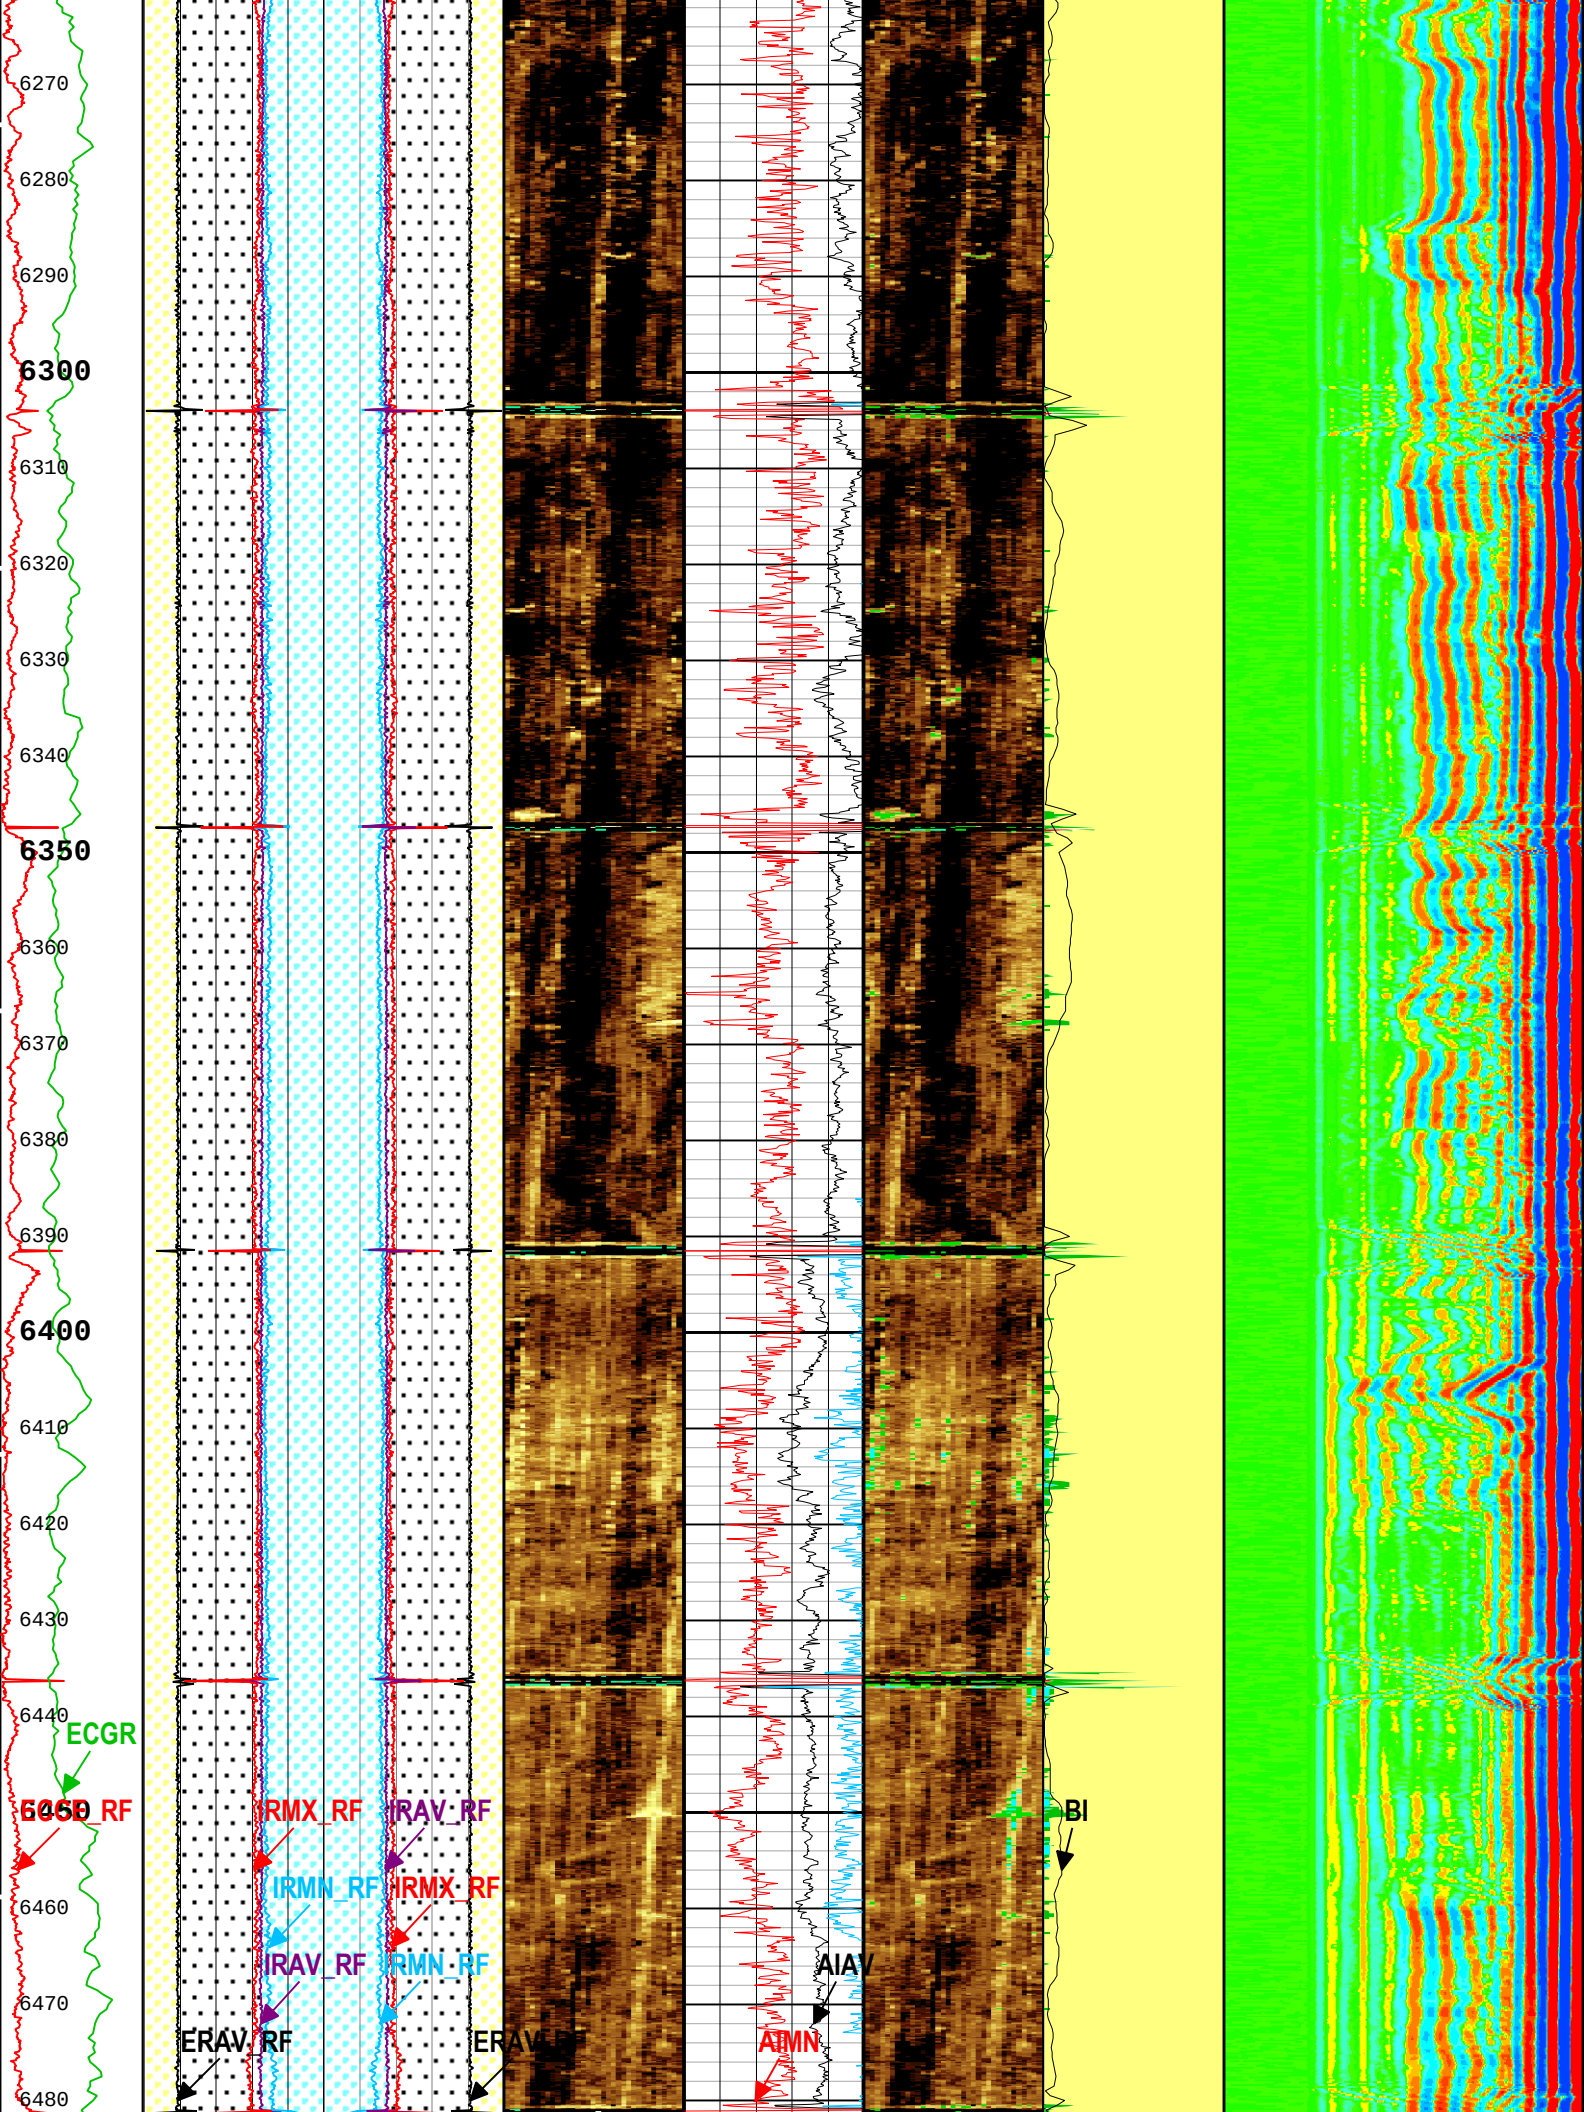
6270
6280
6290
6300
6310
6320
6330
6340
6350
6360
6370
6380
6390
6400
6410
6420
6430
6440
6450
6460
6470
6480
ECGR
ERMX_RF
IRMX_RF
IRAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
IRMN_RF
ERAV_RF
ERAV_RF
BI
AIAV
AIMN

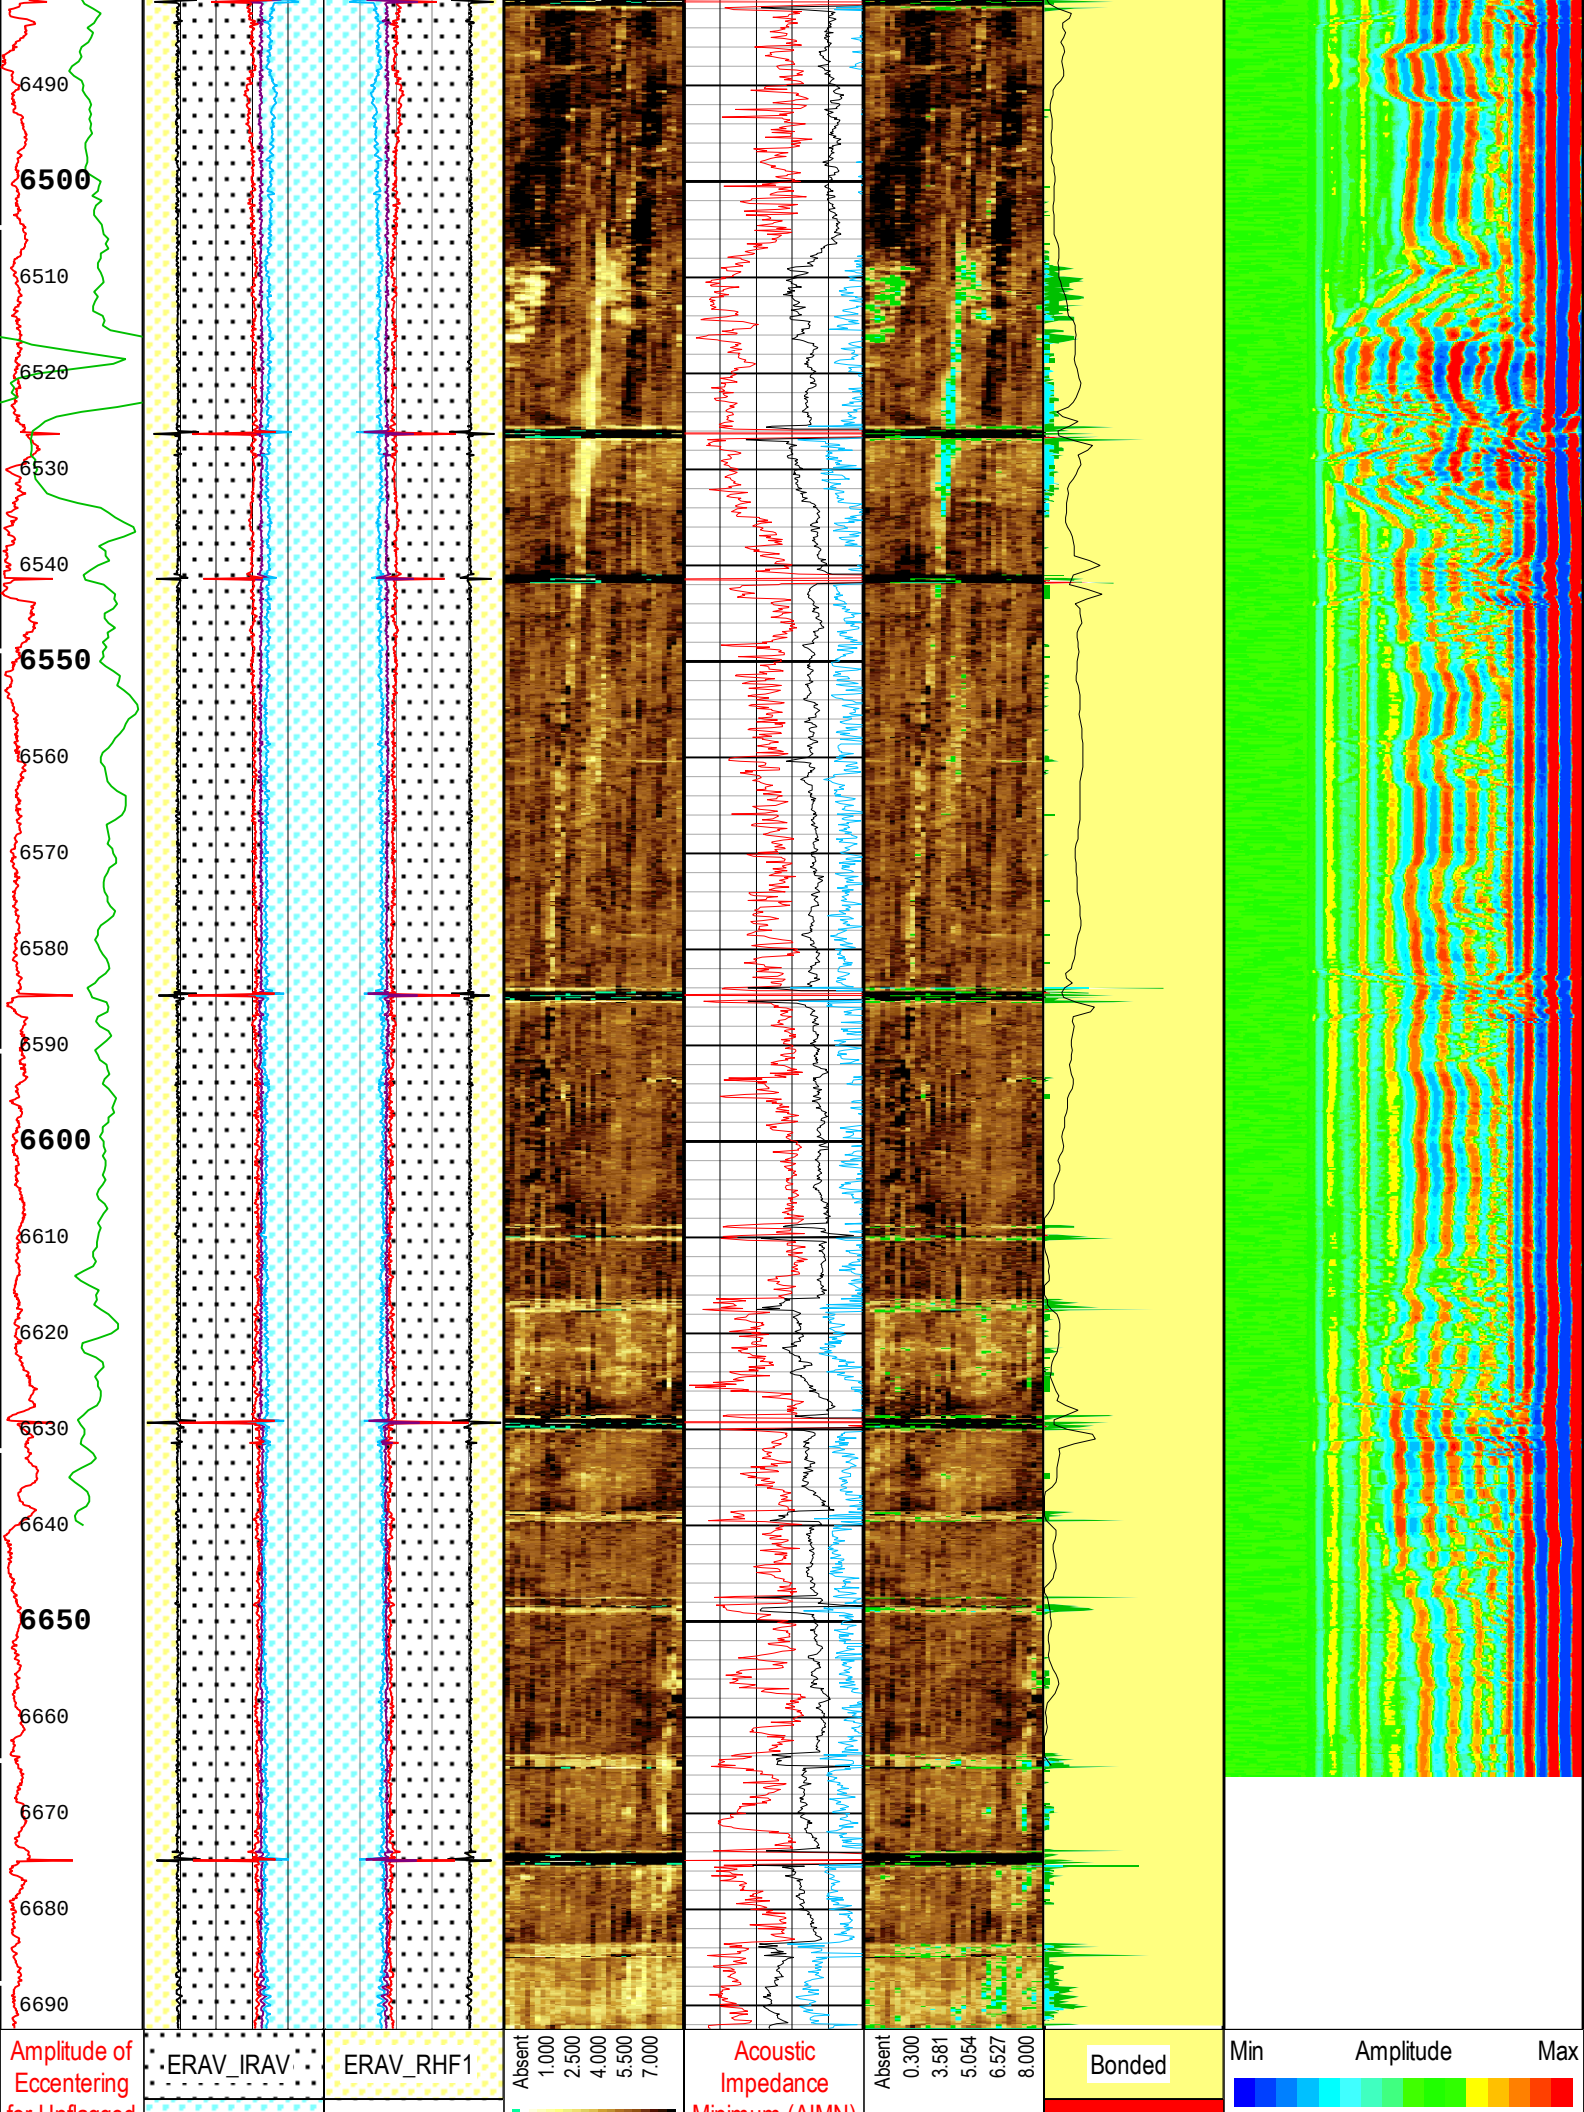
6490
6500
6510
6520
6530
6540
6550
6560
6570
6580
6590
6600
6610
6620
6630
6640
6650
6660
6670
6680
6690
Amplitude of Eccentering for Unflagged
ERAV_IRAV
ERAV_RHF1
Absent
1.000
2.500
4.000
5.500
7.000
Acoustic Impedance Minimum (AIMN)
Absent
0.300
3.581
5.054
6.527
8.000
Bonded
Min
Amplitude
Max

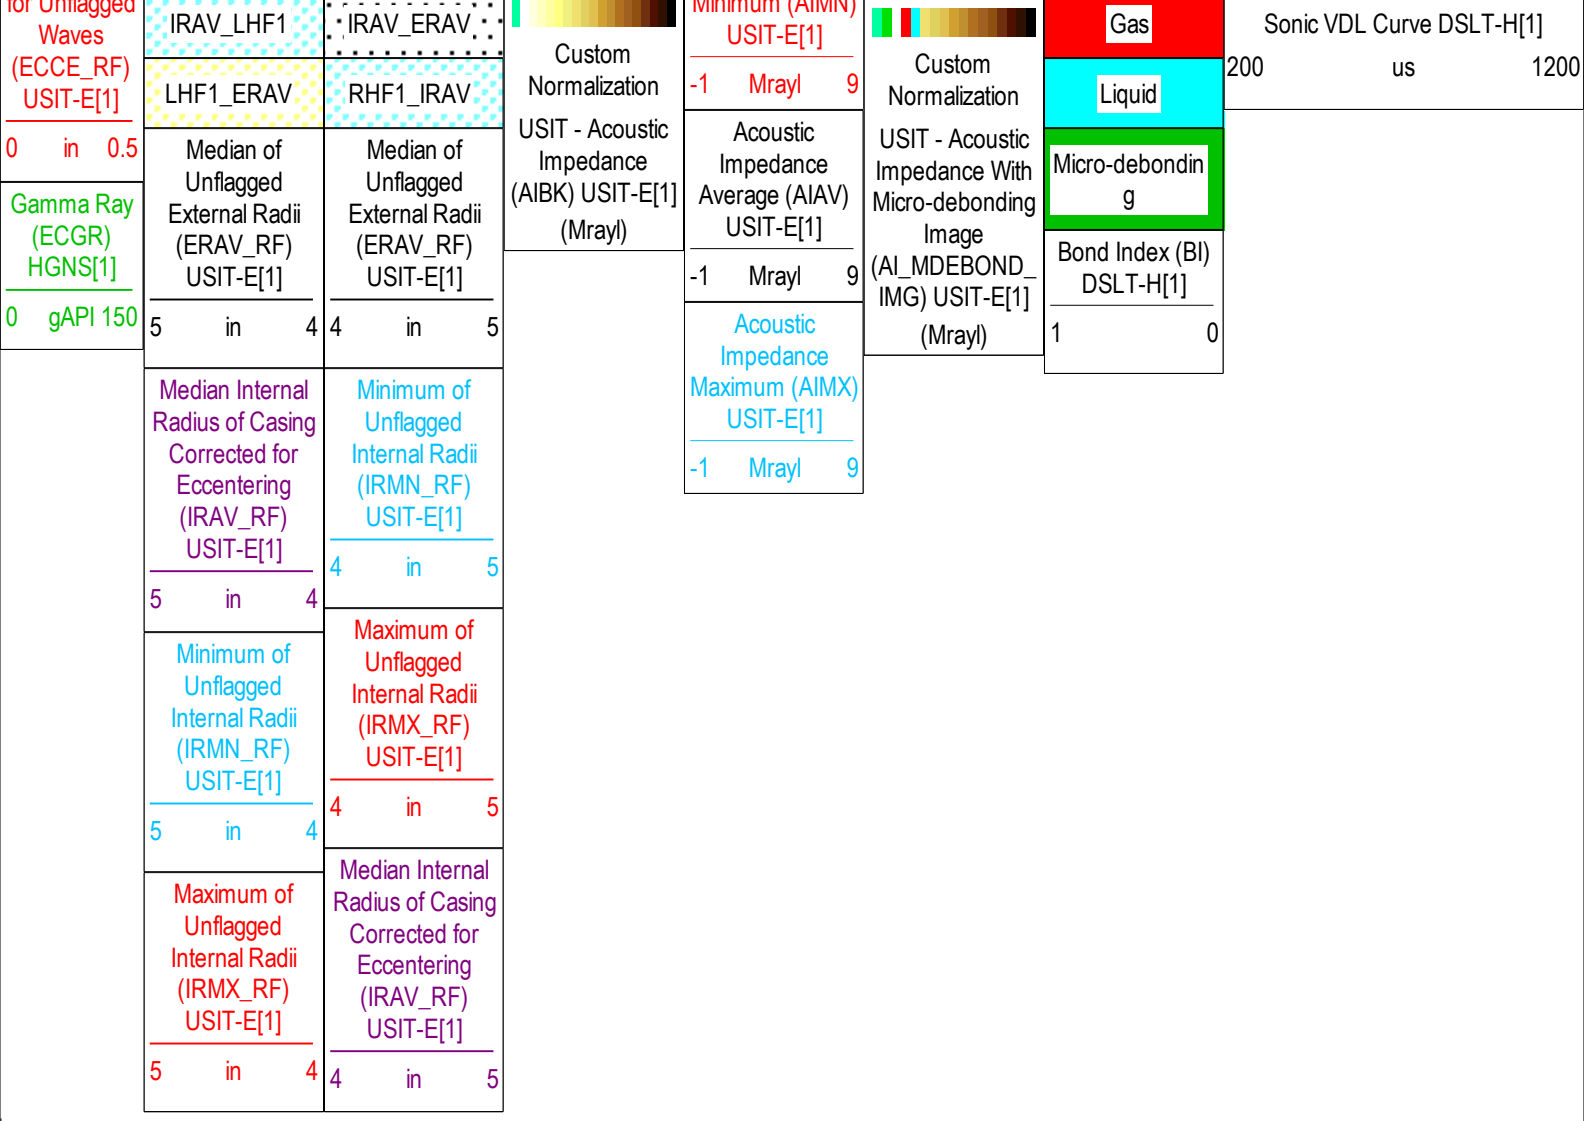

Description: USI VDL Cement Format: Log (LBV1_USI-VDL (DSLT) Cement 9.625inch) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 28-Jun-2016 19:06:50

Channel Processing Parameters

28Jun2016: Parameters

Parameter	Description	Tool	Value	Unit
AMSG	Auxiliary Minimum Sliding Gate	DSLT-H	140	us
ISSBAR	Barite Mud Presence Flag	Borehole	No	
BERJ	Bad Echo Rejection	USIT-E	On	
BHS	Borehole Status (Open or Cased Hole)	Borehole	Cased	
BILI	Bond Index Level for Zone Isolation	DSLT-H	0.8	
BS	Bit Size	WLSESSION	Depth Zoned	in
CASING_PRATIO	Casing Poisson Ratio	USIT-E	Standard Poisson Ratio	
CBLG	CBL Gate Width	DSLT-H	81	us
CBLO	Casing Bottom (Logger)	WLSESSION	6828	ft
CBRA	CBL LQC Reference Amplitude in Free Pipe	DSLT-H	52	mV
CDEN	Cement Density	HGNS-H	2	g/cm3
CMCF	CBL Cement Type Compensation Factor	DSLT-H	1	
CMTY(U-USIT_CEMT)	Cement Type	USIT-E	Regular Cement	
THNO	Nominal Casing Thickness - Zoned along logger depths	WLSESSION	0.472	in
DETE	Delta-T Detection	DSLT-H	E1	
DFD	Drilling Fluid Density	Borehole	8.6	lbm/gal
DFT	Drilling Fluid Type	Borehole	Water	

DTMD	Borehole Fluid Slowness	Borehole	206	us/ft
FCF	CBL Fluid Compensation Factor	DSLT-H	0.98	
FDII	FPM Data Interpolation Interval	USIT-E	0	ft
GCSE_DOWN_PASS	Generalized Caliper Selection for WL Log Down Passes	Borehole	BS	
GCSE_UP_PASS	Generalized Caliper Selection for WL Log Up Passes	Borehole	BS	
GOBO_CURR	Good Bond in Arbitrary Cement	DSLT-H	4.74	mV
GR_MULTIPLIER	Gamma Ray Multiplier	HGNS-H	1	
HEMA	Hematite Presence Flag	Borehole	No	
ICE_PROCESS	ICE Processing	USIT-E	Yes	
IMAR	Image Rotation	USIT-E	Off	
MAHTR	Manual High Threshold Reference for first arrival detection	DSLT-H	120	
MATT_CURR	Maximum Attenuation in Arbitrary Cement	DSLT-H	9.3	dB/ft
MCI	Minimum Cemented Interval for Isolation	DSLT-H	Depth Zoned	ft
MEAS_WLEN	Tcube Processing Window Length in Measurement Mode	USIT-E	29.67	us
MNHTR	Minimum High Threshold Reference for first arrival detection	DSLT-H	100	
MSA	Minimum Sonic Amplitude	DSLT-H	2.61	mV
MSA_CURR	Minimum Sonic Amplitude in Arbitrary Cement	DSLT-H	2.61	mV
MUD_N_FRP	Free Pipe Mud Normalization Factor	USIT-E	1.12	
MUD_N_THE	Theoretical Mud Normalization Factor	USIT-E	1	
NMSG	Near Minimum Sliding Gate	DSLT-H	279	us
NMXG	Near Maximum Sliding Gate	DSLT-H	950	us
NUMP	Number of Detection Passes	DSLT-H	2	
OPLEV	USIT Remove Flagged Data Level	USIT-E	OPT2	
RCOD	Reference Calibrator Outer Diameter	USIT-E	7	in
RCSO	Reference Calibrator Standoff	USIT-E	1.378	in
RCTH	Reference Calibrator Thickness	USIT-E	0.295	in
SDNV	Number of Vertical Samples used for Micro-debonding Computation	USIT-E	5	
SDTHOR	Acoustic Impedance STD Horizontal Threshold for Micro-debonding	USIT-E	0.5	Mrayl
SDTVER	Acoustic Impedance STD Vertical Threshold for Micro-debonding	USIT-E	0.3	Mrayl
SFAF	Sonic Formation Attenuation Factor	DSLT-H	3.25	dB/ft
SGAD	Sliding Gate Status	DSLT-H	Off	
SGCL	Sliding Gate Closing Delta-T	DSLT-H	130	us/ft
SGCW	Sliding Gate Closing Width	DSLT-H	25	us
SGDT	Sliding Gate Delta-T	DSLT-H	57	us/ft
SGW	Sliding Gate Width	DSLT-H	110	us
SLEV	Signal Level for AGC	DSLT-H	5000	mV
SOCN	Standoff Distance	HGNS-H	0.125	in
SOCO	Standoff Correction Option	HGNS-H	No	
TCUB	T^3 Processing Level	USIT-E	Loop	
THDH	Maximum Search Thickness (percentage of nominal)	USIT-E	130	%
THDL	Minimum Search Thickness (percentage of nominal)	USIT-E	70	%
HISC	Tool Position: Centered or Eccentered	HGNS-H	Eccentered	
U-USIT_DFSZ	Drilling Fluid Specific Acoustic Impedance	USIT-E	0	Mrayl
UFGDE	Fiberglass Density	USIT-E	1.95	g/cm3
UFGPS	Fiberglass Processing Selection	USIT-E	No	
UFGVL	Fiberglass Velocity	USIT-E	9678.48	ft/s
USI_FSOD	USIT USI Fluid Slowness Fits Casing Outer Diameter	USIT-E	0_OFF	
USI_FVEL_SEL	USI Fluid Velocity Selection	USIT-E	Automatic	
USI_ZMUD_SEL	USI Mud Impedance Selection	USIT-E	FreePipe Norm.	
THDR	Thickness Detection Policy	USIT-E	Fundamental	

THDP	Thickness Detection Policy	USIT-E	Fundamental	
VCAS	Ultrasonic Transversal Velocity in Casing	USIT-E	51.4	us/ft
VDLG	VDL Manual Gain	DSLT-H	5	
ZCAS	Acoustic Impedance of Casing	USIT-E	46.25	Mrayl
ZCMT	Acoustic Impedance of Cement	DSLT-H	6.8	Mrayl
ZCMT_NEAT	Acoustic Impedance of Cement in Neat Cement	DSLT-H	6.8	Mrayl
ZINI	Initial Estimate of Cement Impedance	USIT-E	-1	Mrayl
ZMUD	Acoustic Impedance of Mud	Borehole	1.48	Mrayl
ZTCM	Acoustic Impedance Threshold for Cement	USIT-E	2.6	Mrayl
ZTGS	Acoustic Impedance Threshold for Gas	USIT-E	0.3	Mrayl

28Jun2016Depth Zoned Parameters

Parameter	Value	Start (ft)	Stop (ft)
BS	17.5	18	815
BS	12.25	815	6692.5
MCI	21.68	18	815
MCI	14.81	815	6692.5

All depth are actual.

Tool Control Parameters

28Jun2016: Parameters

Parameter	Description	Tool	Value	Unit
AGMN	Minimum Gain of Cartridge	USIT-E	-12	dB
AGMX	Maximum Gain of Cartridge	USIT-E	18	dB
DDEL	Digitizing Delay	DSLT-H	0	us
U-USIT_DDT5	USIC Downhole Decimation for T5 only	USIT-E	0_NONE	
DOT(DOS)	Distance between Opposite Transducer Faces	USIT-E	4.874	in
MODE	DSLT Acquisition Mode	DSLT-H	CBL	
RATE	DSLT Firing Rate	DSLT-H	15 Hz	
DTFS	DSLT Telemetry Frame Size	DSLT-H	536	
DWCO	Digitizer Word Count	DSLT-H	250	
EMXV	EMEX Voltage	USIT-E	42	V
HRES	Horizontal Resolution	USIT-E	10 deg	
MOTOR_PROTECT	Motor Protection	USIT-E	Off	
SDTH	Switch Down Threshold	DSLT-H	20000	
SGAI	Selectable Acquisition Gain	DSLT-H	x1	
SUTH	Switch Up Threshold	DSLT-H	1000	
TMUC	Type of Mud	USIT-E	BRI	
UACLV_PERM	Ultrasonic ACLV Permanent	USIT-E	No	
ULOG	Logging Objective	USIT-E	MEASUREMENT	
UMFR	Modulation Frequency	USIT-E	333333	Hz
USFR	Ultrasonic Sampling Frequency	USIT-E	500000	Hz
UPAT	USIT Emission Pattern	USIT-E	Pattern 500 KHz	
UWKM	USIT Working Mode	USIT-E	Uncompressed 10 deg at 1.5 in LF	
USIT_DEPTHLOG	Starting Depth Log for Ultrasonics	USIT-E	6695	ft
USSP	Ultrasonic Service	USIT-E	USI	
VRES	Vertical Resolution	USIT-E	1.5 in	
WINB	Window Begin Time	USIT-E	45.35	us
WINE	Window End Time	USIT-E	Time Zoned	us
WMOD	Waveform Firing Mode	DSLT-H	Full	

28Jun2016Time Zoned Parameters

28Jun2016Time Zoned Parameters

Pass Log[3]:Up

Parameter	Value	Start Time	Stop Time	Start Depth (ft)	Stop Depth (ft)
WINE	85.35	28-Jun-2016 08:34:23	28-Jun-2016 08:34:41	6692.76	6691.63
WINE	92.19	28-Jun-2016 08:34:41	28-Jun-2016 11:17:22	6691.63	132.88

Pass Log[7]:Up

WINE	85.35	28-Jun-2016 13:31:02	28-Jun-2016 13:39:36	132.88	23.51

All depth are at tool zero.

Composite 1

Main Pass 5 IN = 100 FT

Composite Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
28Jun2016	Log[3]:Up	Up	90.40 ft	6692.79 ft	28-Jun-2016 8:34:23 AM	28-Jun-2016 11:17:22 AM	ON	0.00 ft	Yes
28Jun2016	Log[7]:Up	Up	23.45 ft	330.21 ft	28-Jun-2016 1:20:55 PM	28-Jun-2016 1:39:36 PM	ON	6.00 ft	Yes

All depths are referenced to toolstring zero

Log

Company:Southern California Gas Company Well:Porter 72B

Composite 1:S005

Description: USI Composite Format: Log (LBV1_USI Composite 9.625inch) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth

Creation Date: 28-Jun-2016 19:07:30

USIT Processing Flags (UFLG[0]) USIT-E[1]

1 - UFLG 1 Value within [0.0 - 1.5] - :

2 - UFLG 2 Value within [1.5 - 2.5] - :

3 - UFLG 3 Value within [2.5 - 3.5] - :

4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :

5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :

- UTIM Error
- Pulse Origin Not Detected
- WINLEN Error
- Casing Thickness Error
- Loop Processing Error

TIME_1900 - Time Marked every 60.00 (s)

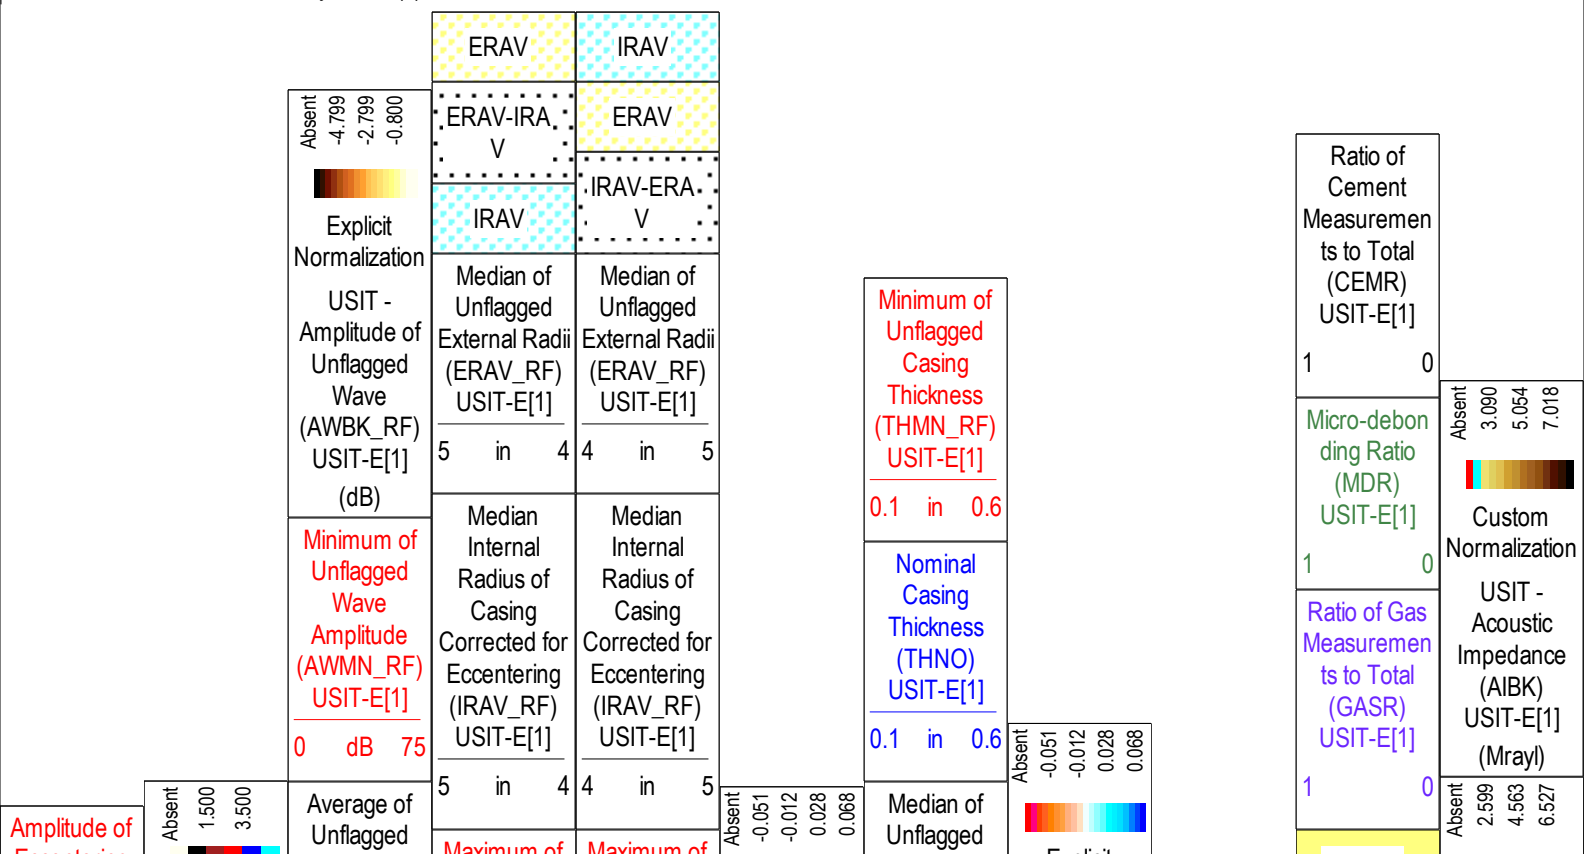

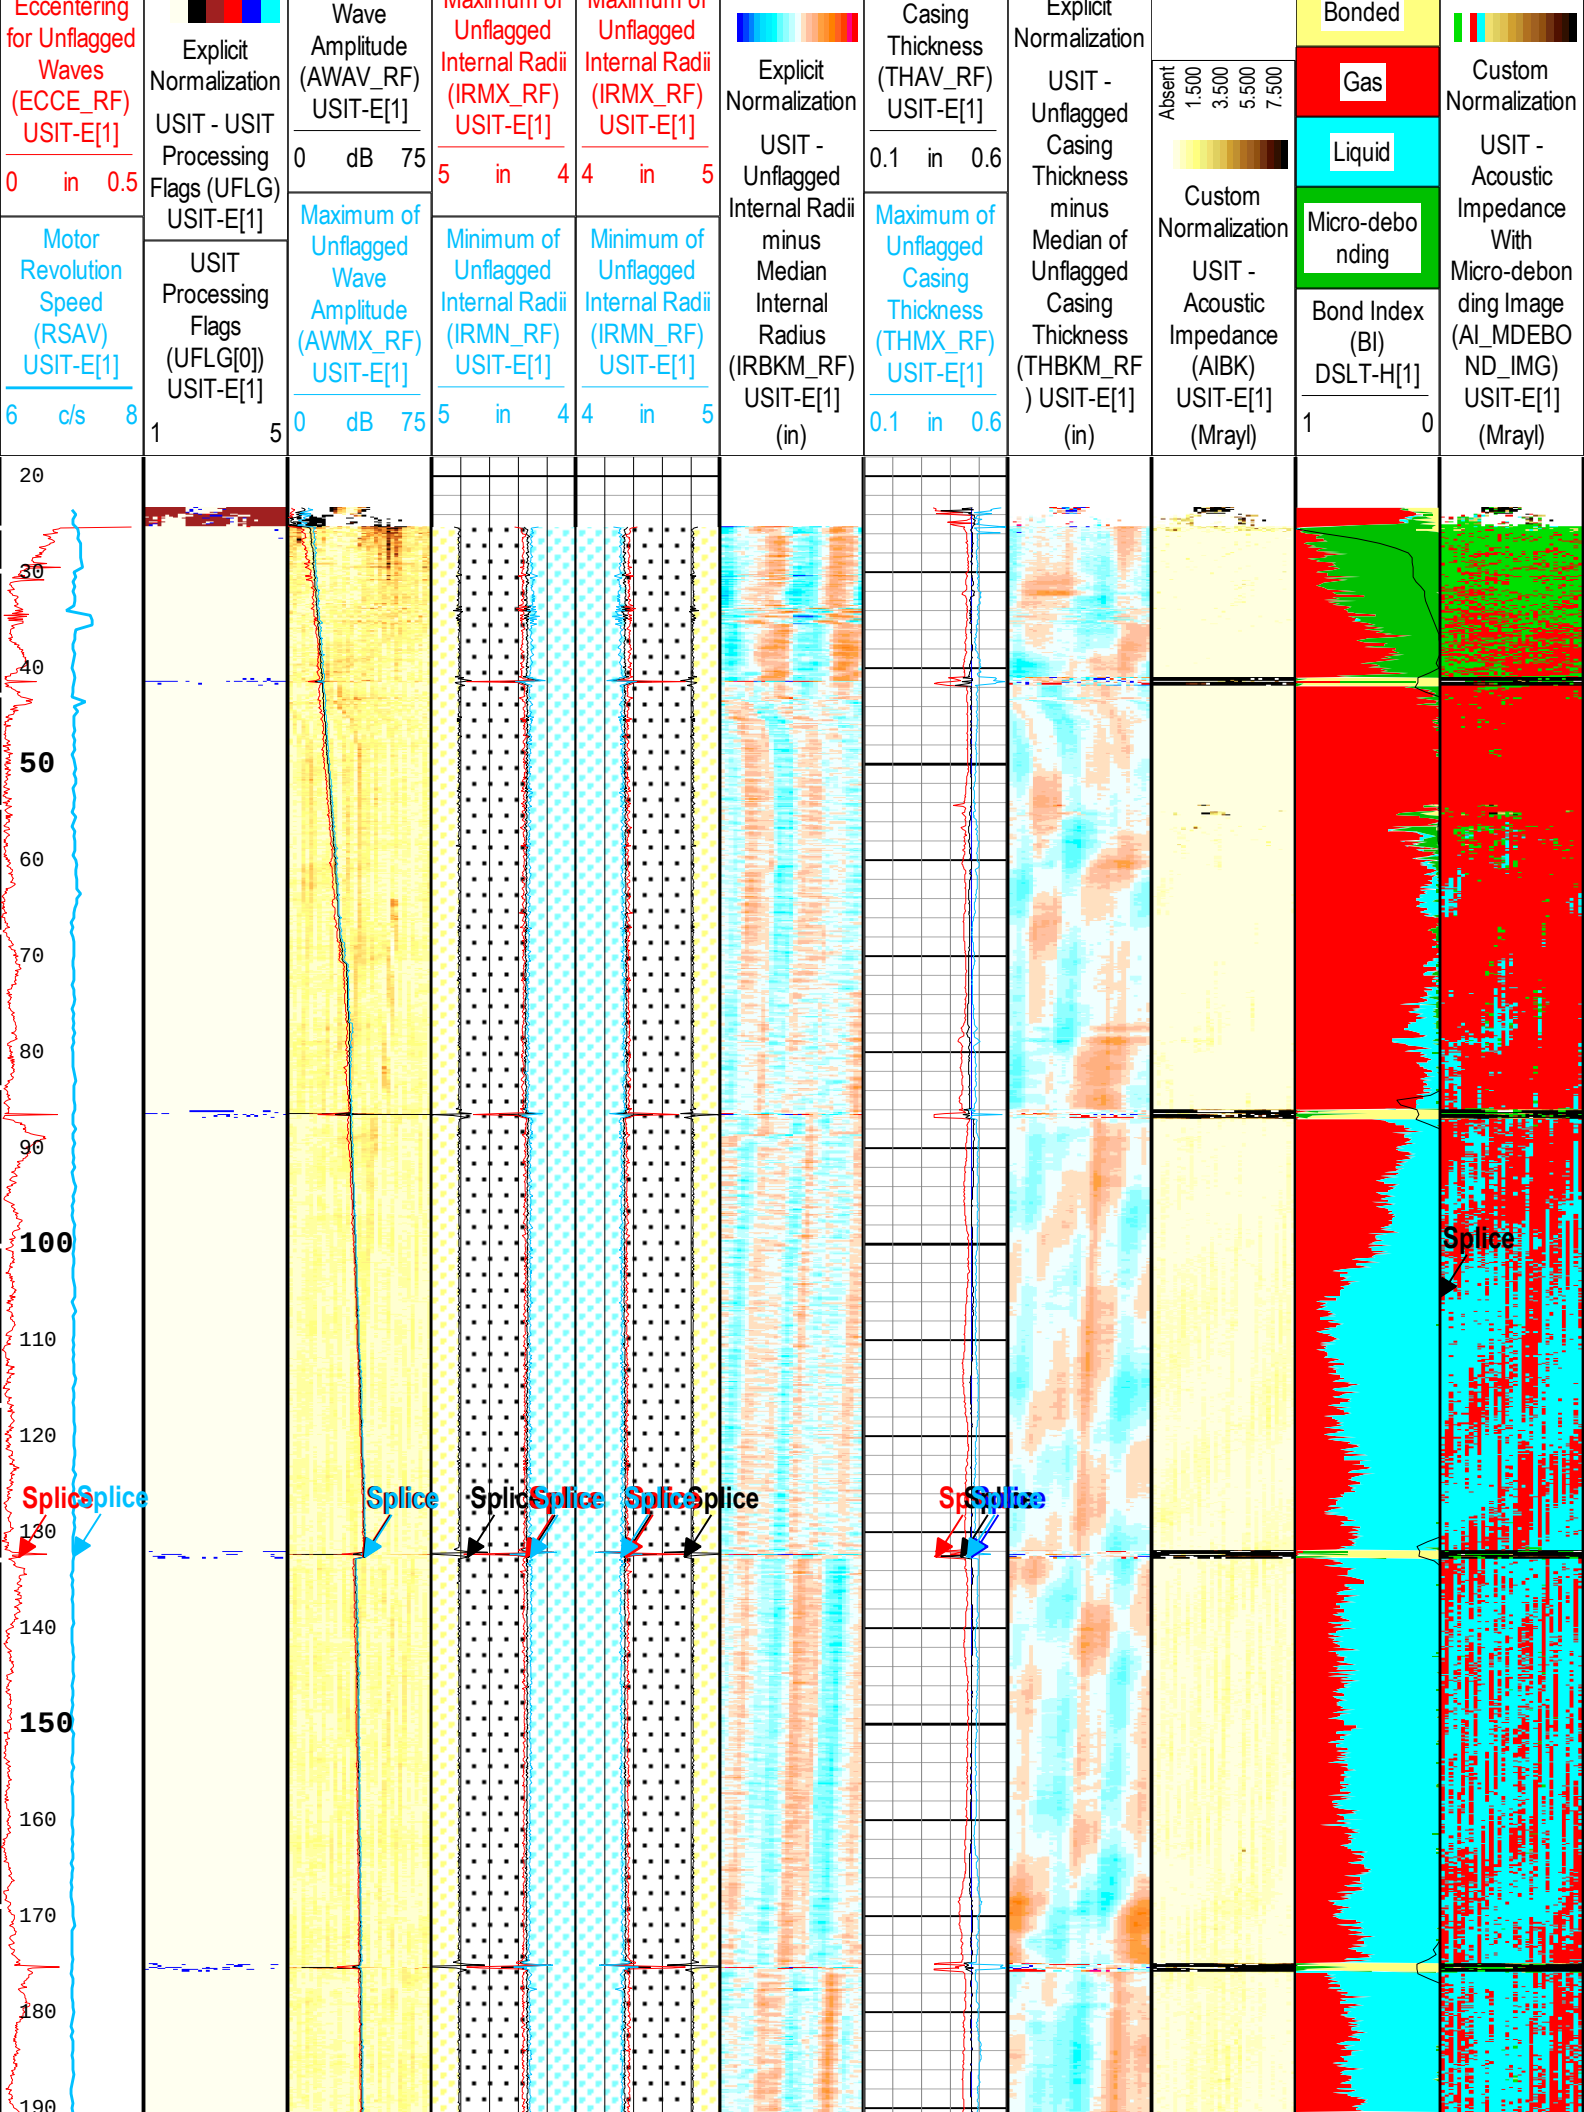
Eccentering for Unflagged Waves (ECCE_RF) USIT-E[1]
0 in 0.5
Motor Revolution Speed (RSAV) USIT-E[1]
6 c/s 8
Explicit Normalization
USIT - USIT Processing Flags (UFLG) USIT-E[1]
USIT Processing Flags (UFLG[0]) USIT-E[1]
1 5
Wave Amplitude (AWAV_RF) USIT-E[1]
0 dB 75
Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E[1]
0 dB 75
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
5 in 4
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
5 in 4
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
4 in 5
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
4 in 5
Explicit Normalization
USIT - Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E[1]
(in)
Casing Thickness (THAV_RF) USIT-E[1]
0.1 in 0.6
Maximum of Unflagged Casing Thickness (THMX_RF) USIT-E[1]
0.1 in 0.6
Explicit Normalization
USIT - Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E[1]
(in)
Absent
1.500
3.500
5.500
7.500
Custom Normalization
USIT - Acoustic Impedance (AIBK) USIT-E[1]
(Mrayl)
Bonded
Gas
Liquid
Micro-debonding
Bond Index (BI) DSLT-H[1]
1 0
Custom Normalization
USIT - Acoustic Impedance With Micro-debonding Image (AI_MDEBOND_IMG) USIT-E[1]
(Mrayl)
20
30
40
50
60
70
80
90
100
110
120
130
140
150
160
170
180
190
Splice
Splice
Splice
Splice
Splice
Splice
Splice
Splice
Splice
Splice
Splice
Splice

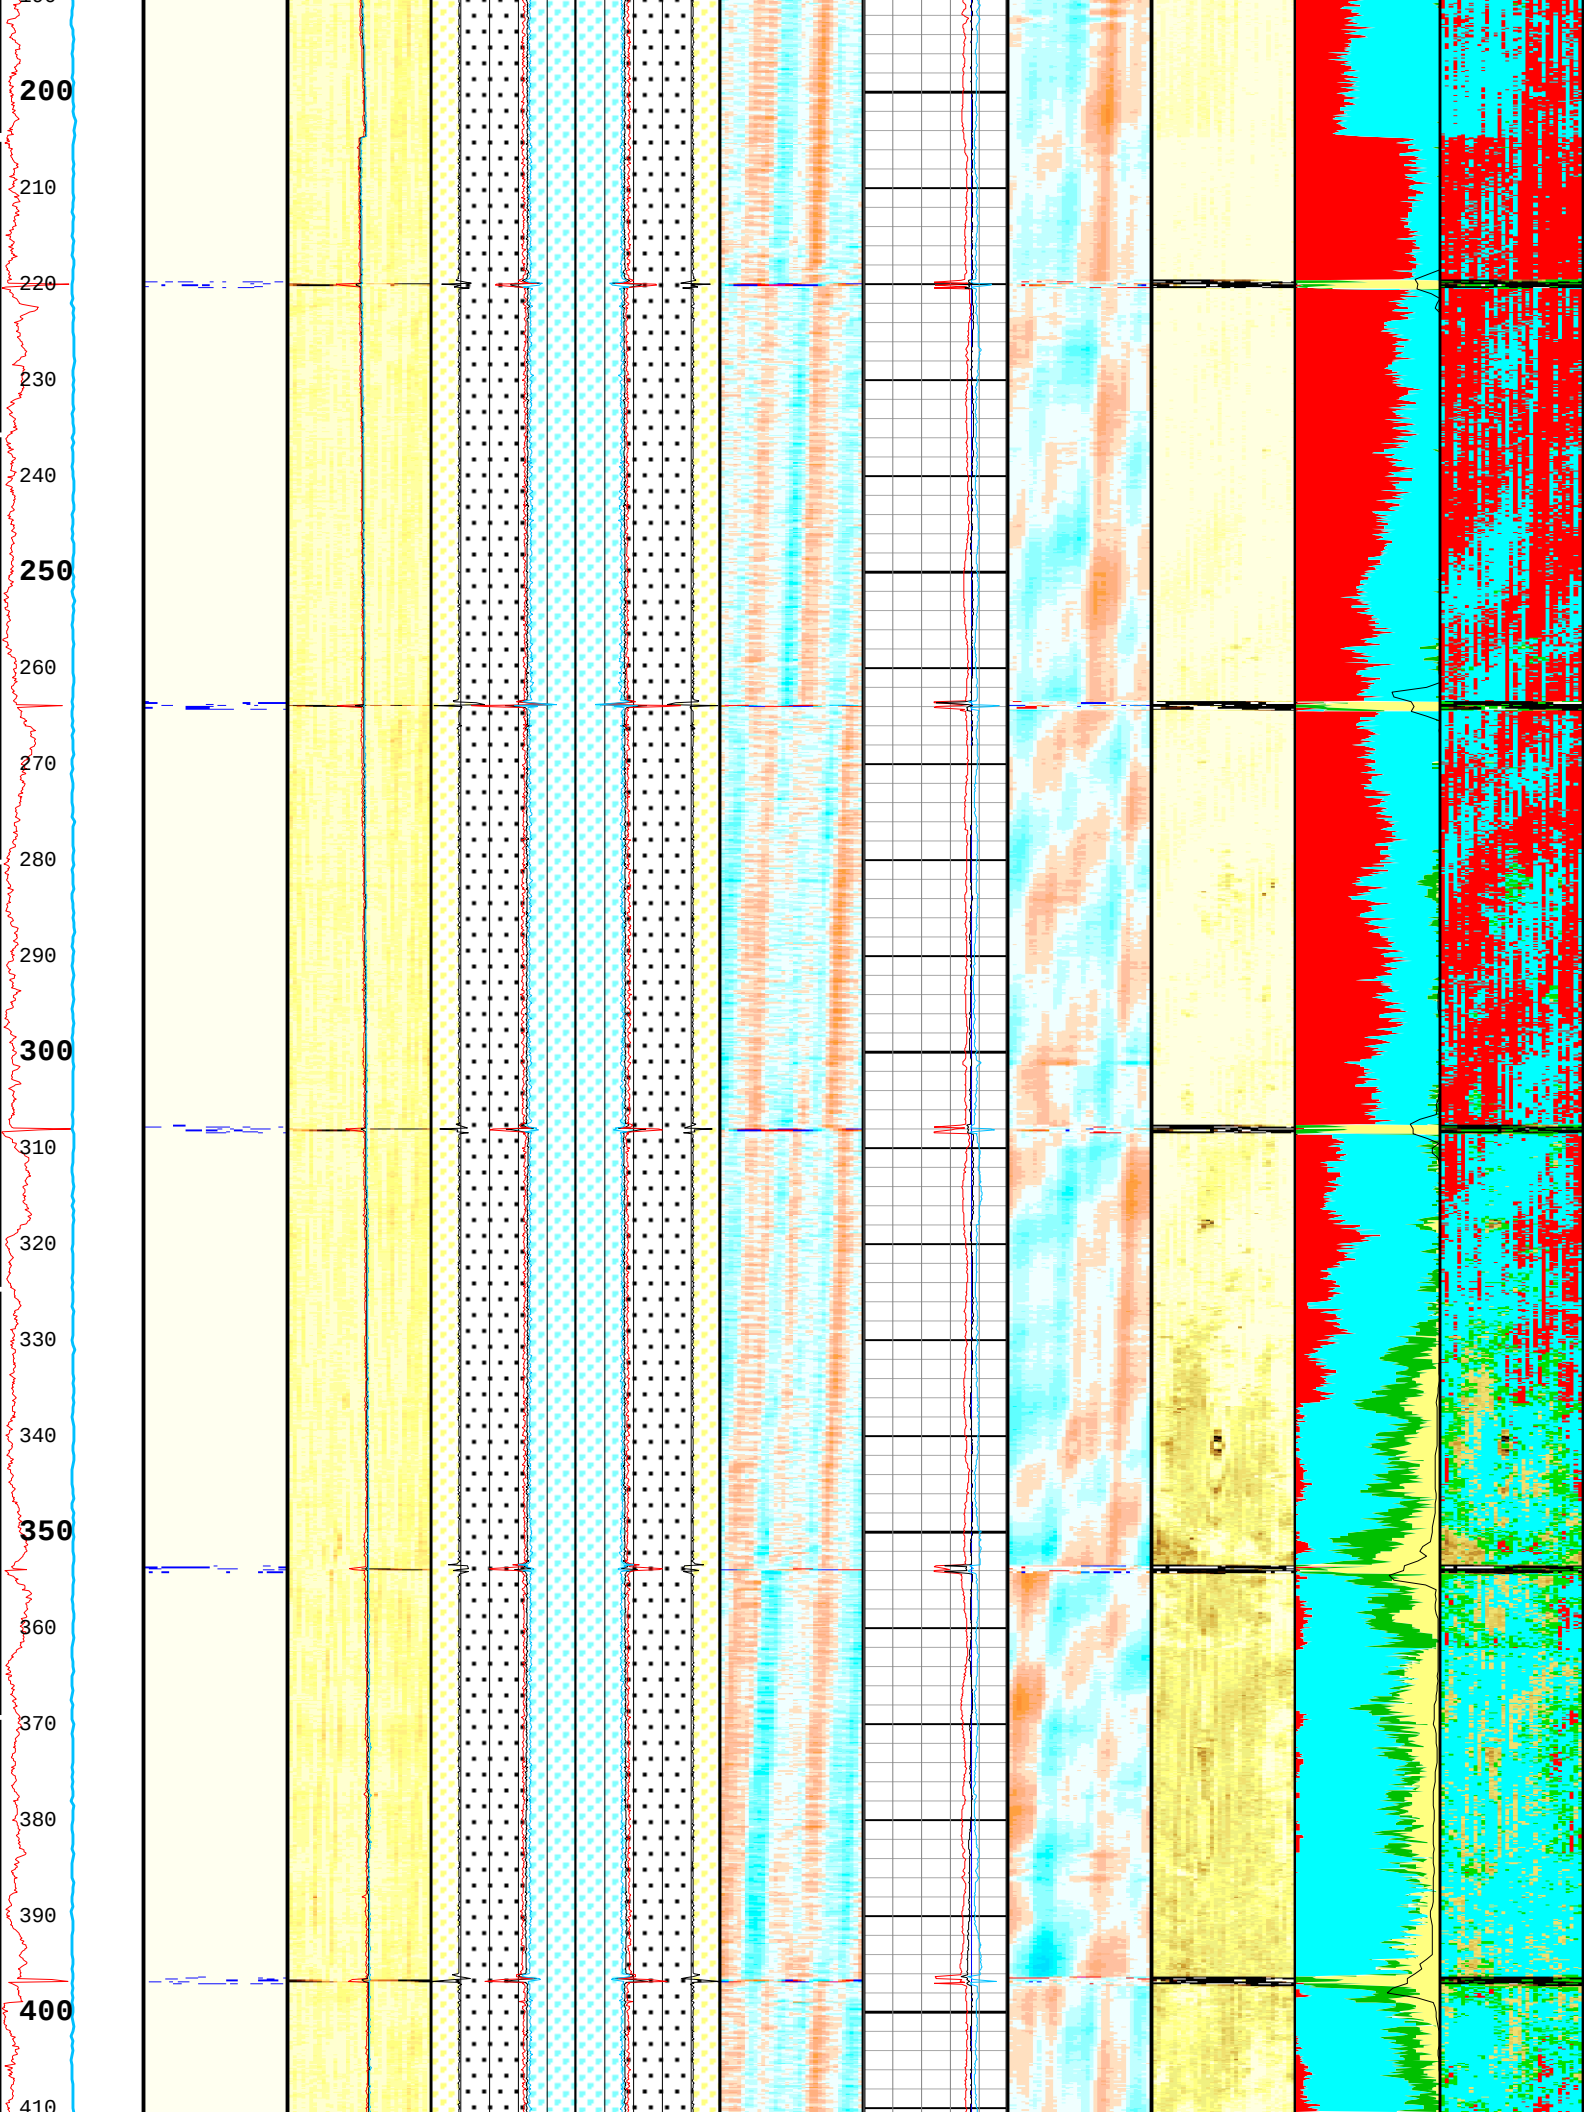
200
210
220
230
240
250
260
270
280
290
300
310
320
330
340
350
360
370
380
390
400
410

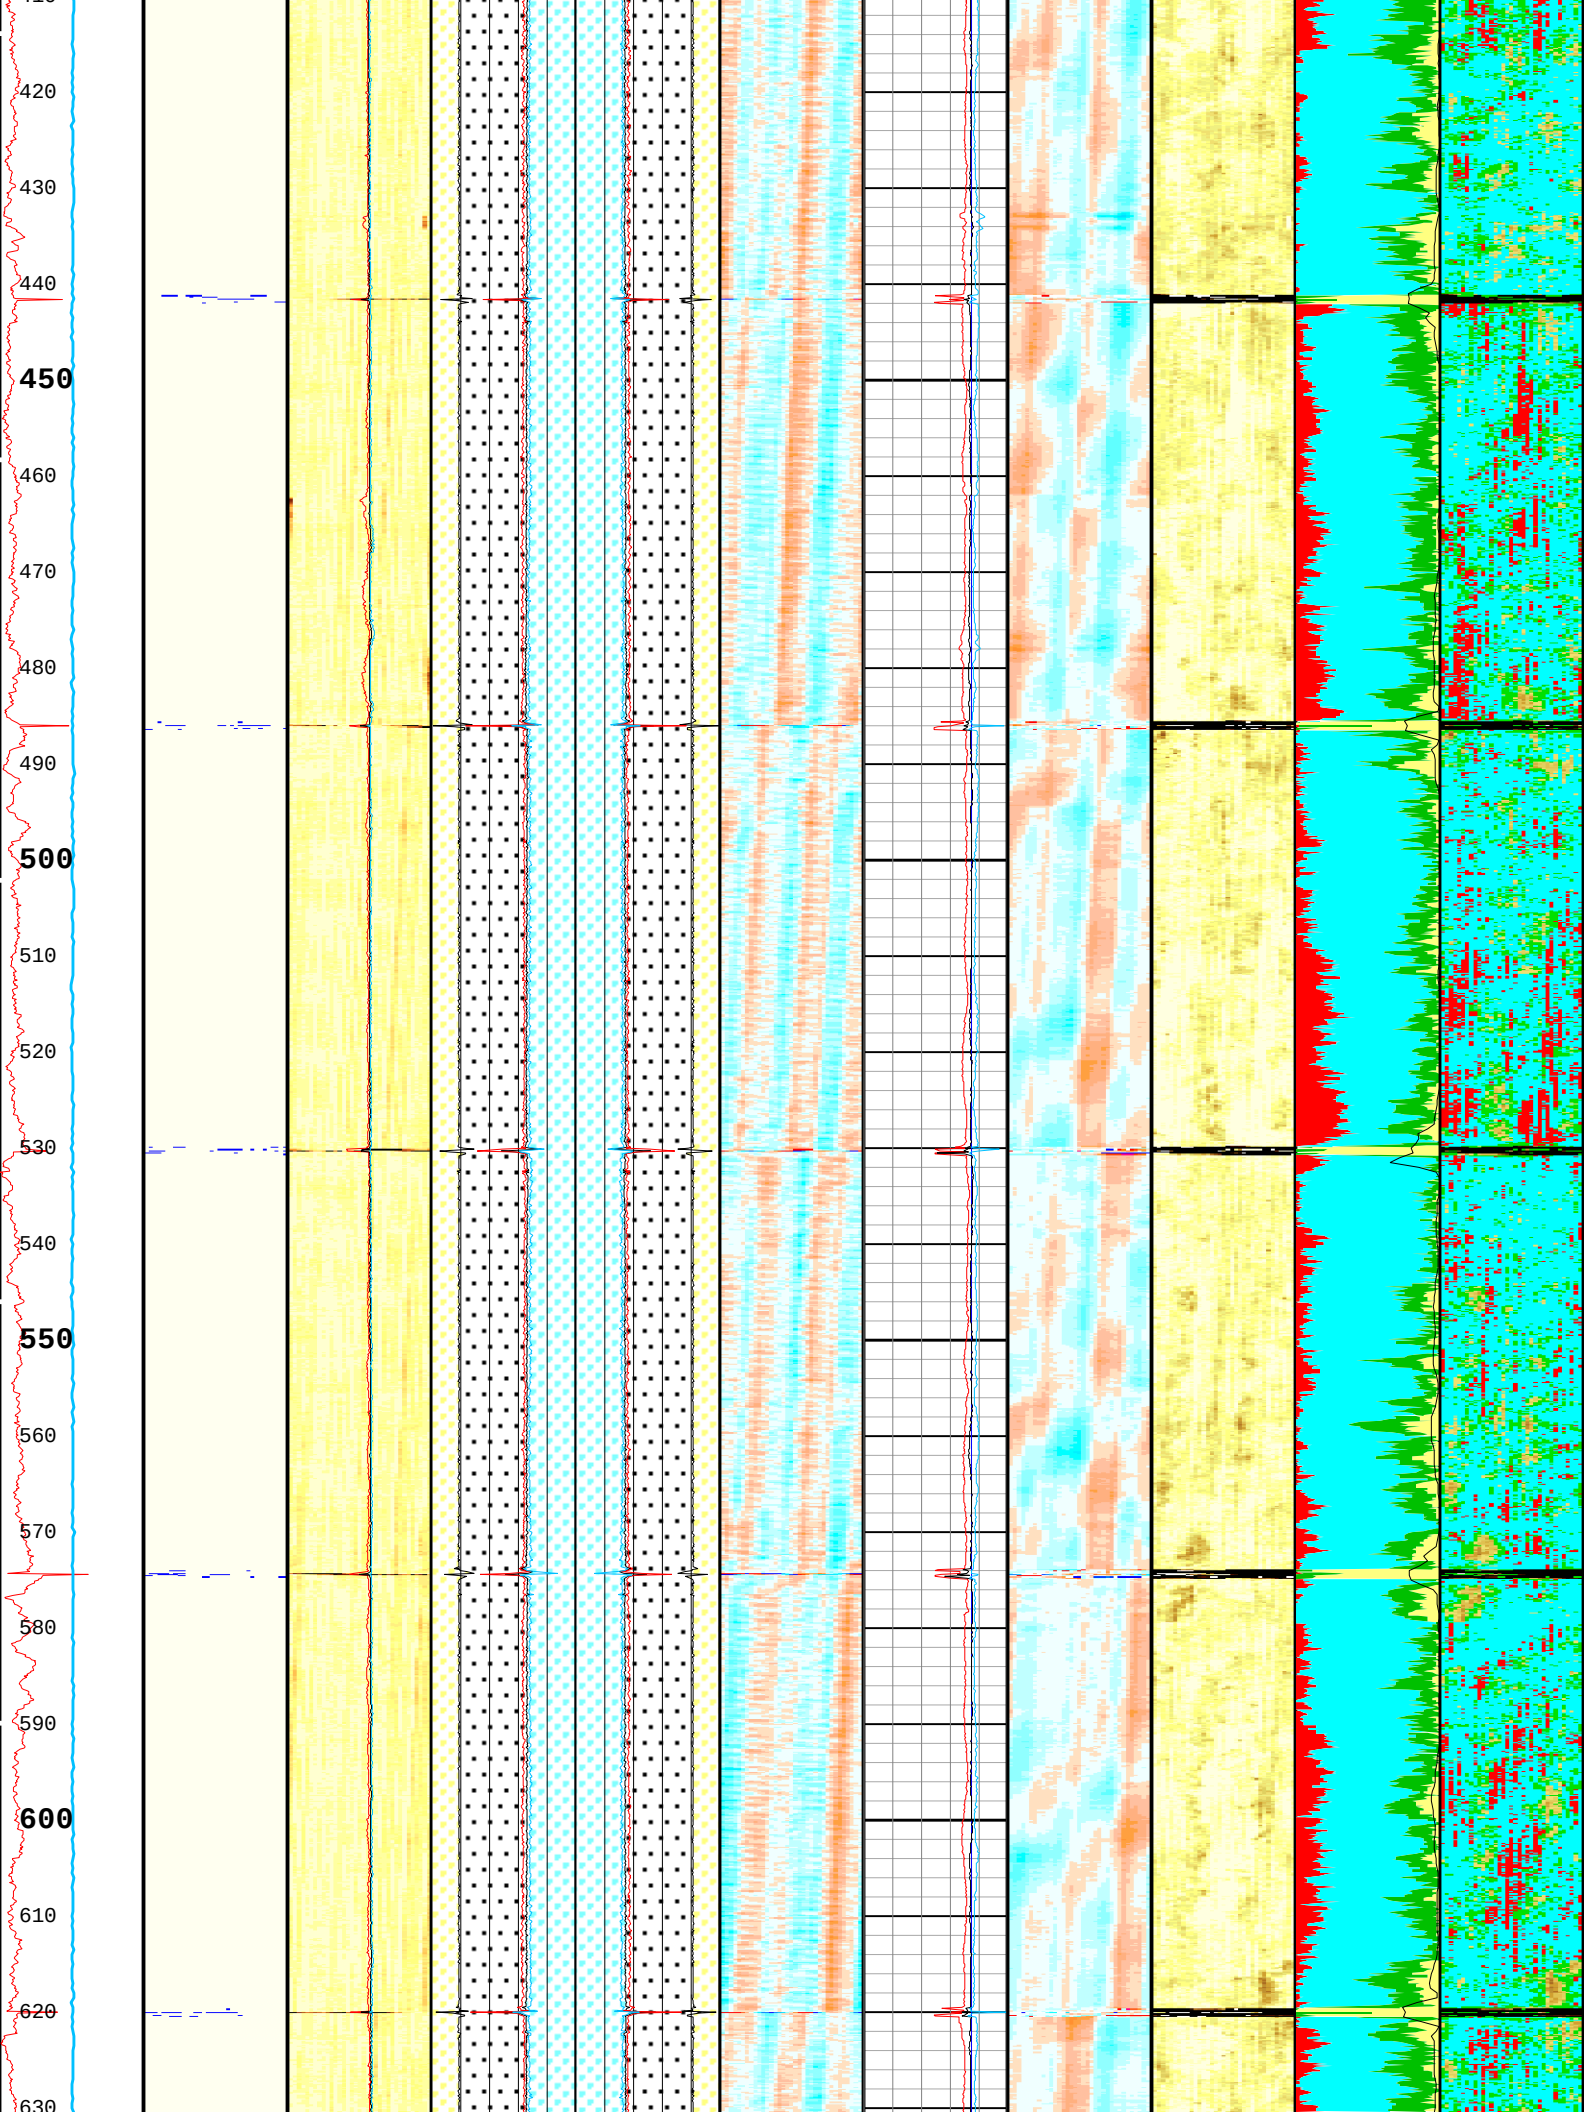
420
430
440
450
460
470
480
490
500
510
520
530
540
550
560
570
580
590
600
610
620
630

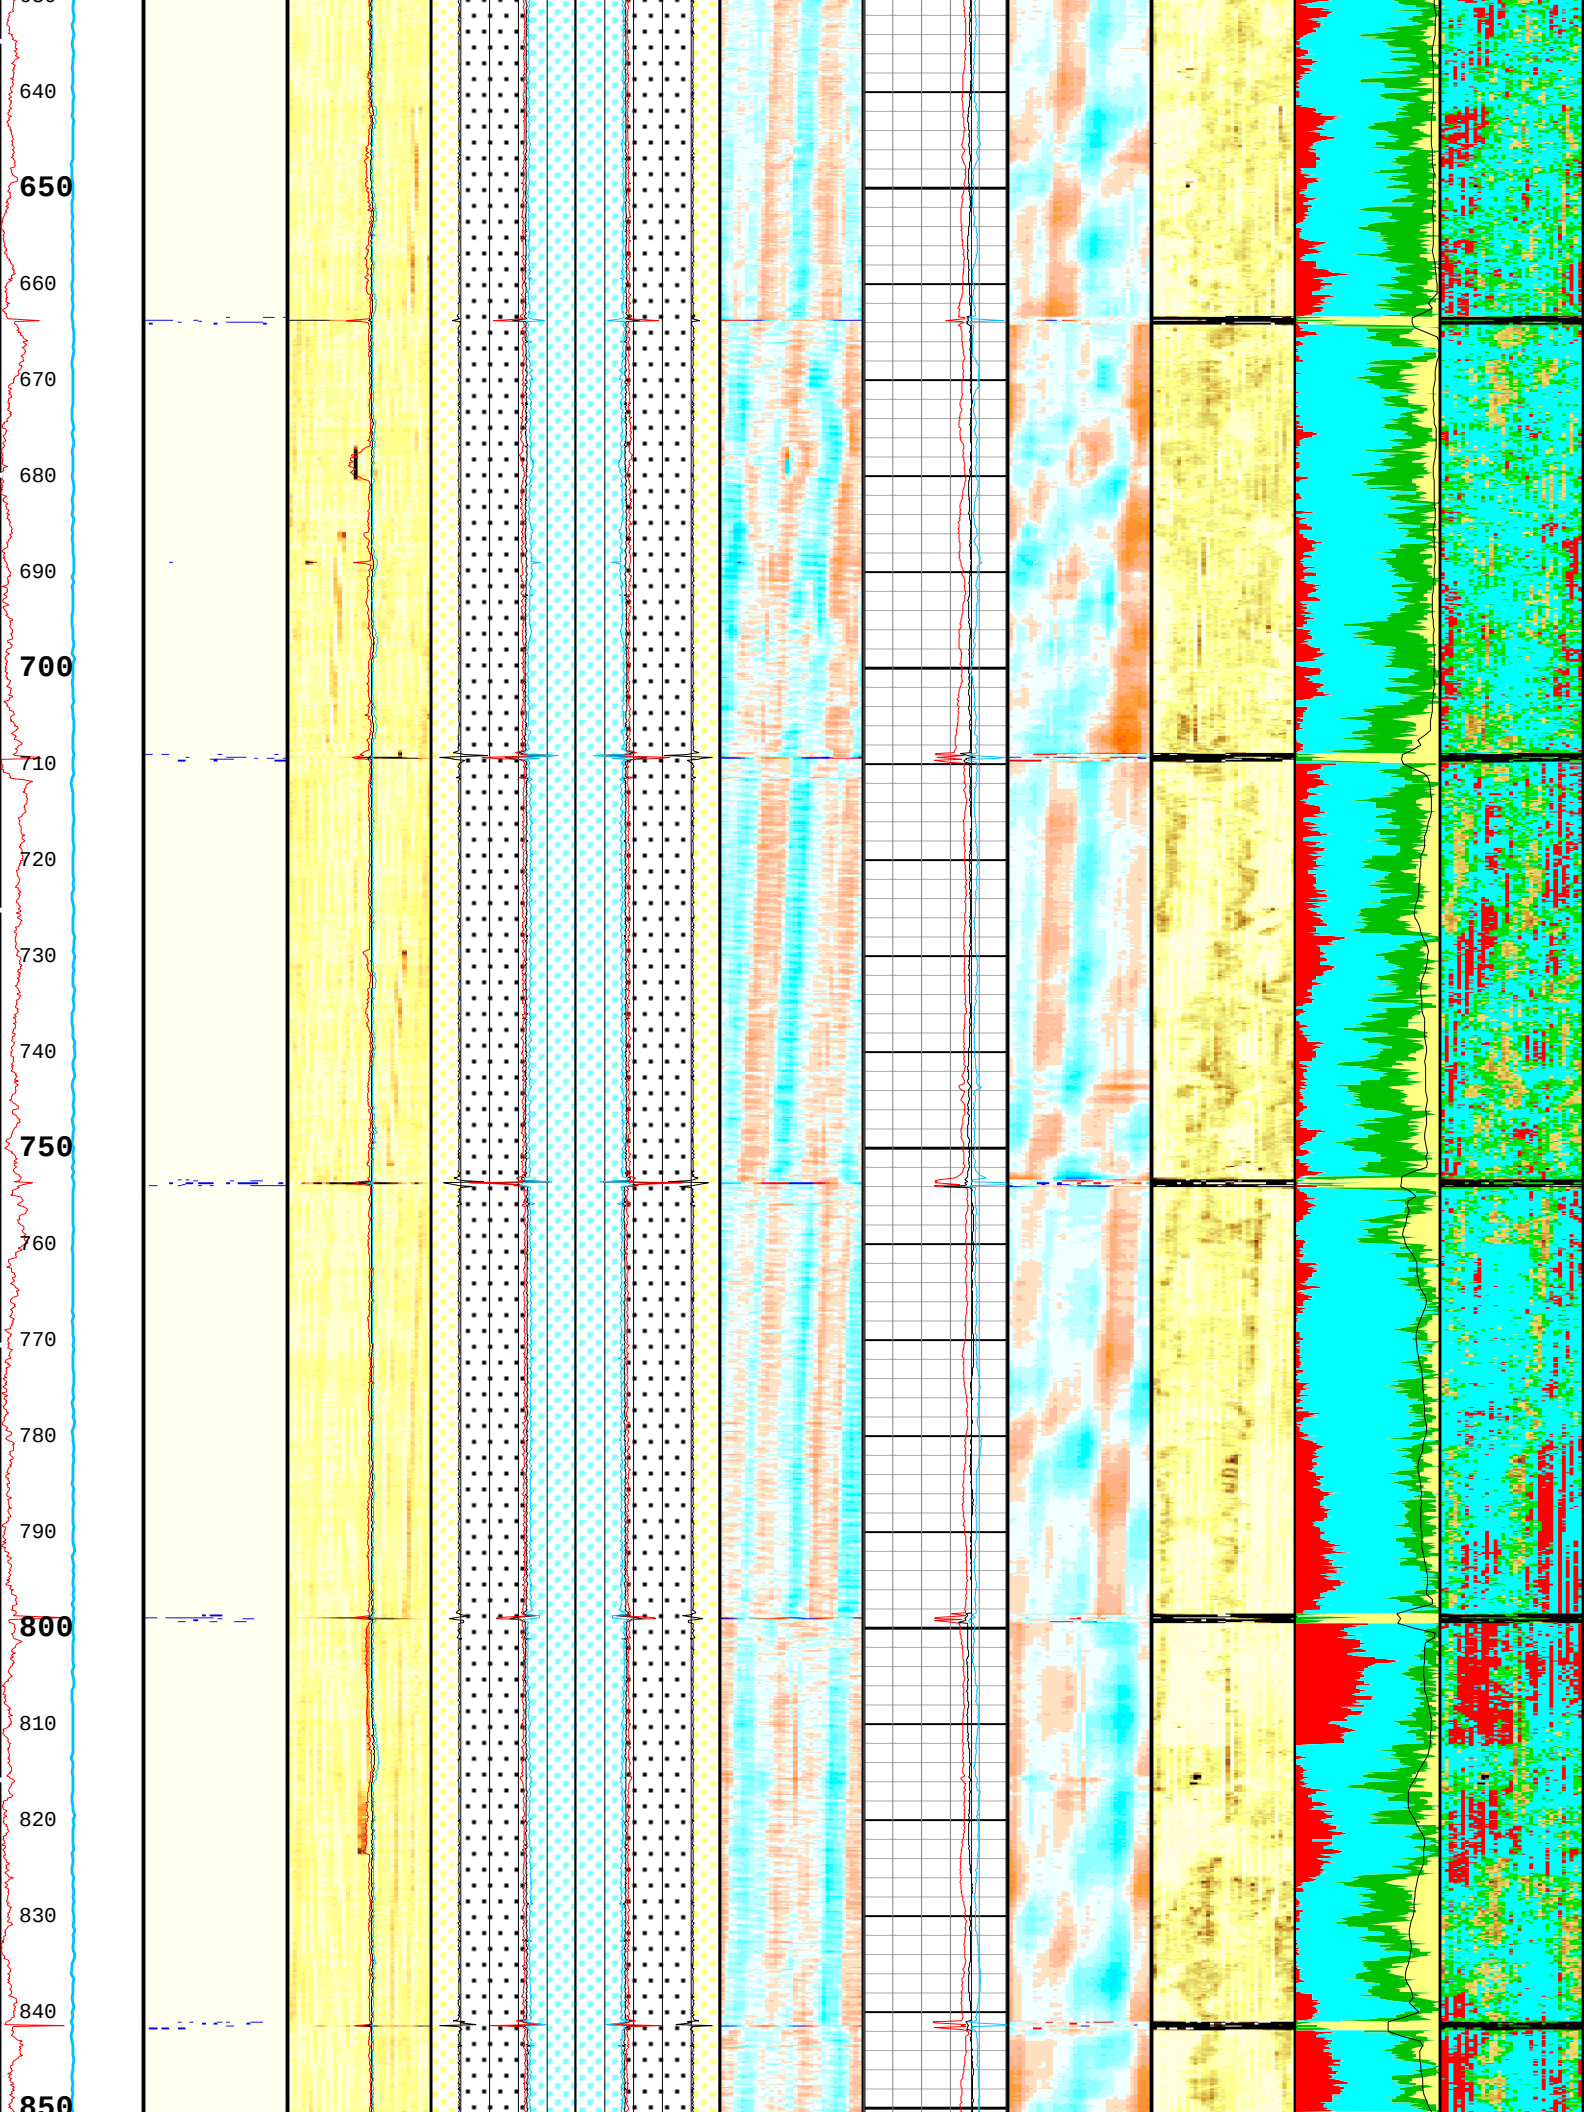
640
650
660
670
680
690
700
710
720
730
740
750
760
770
780
790
800
810
820
830
840
850

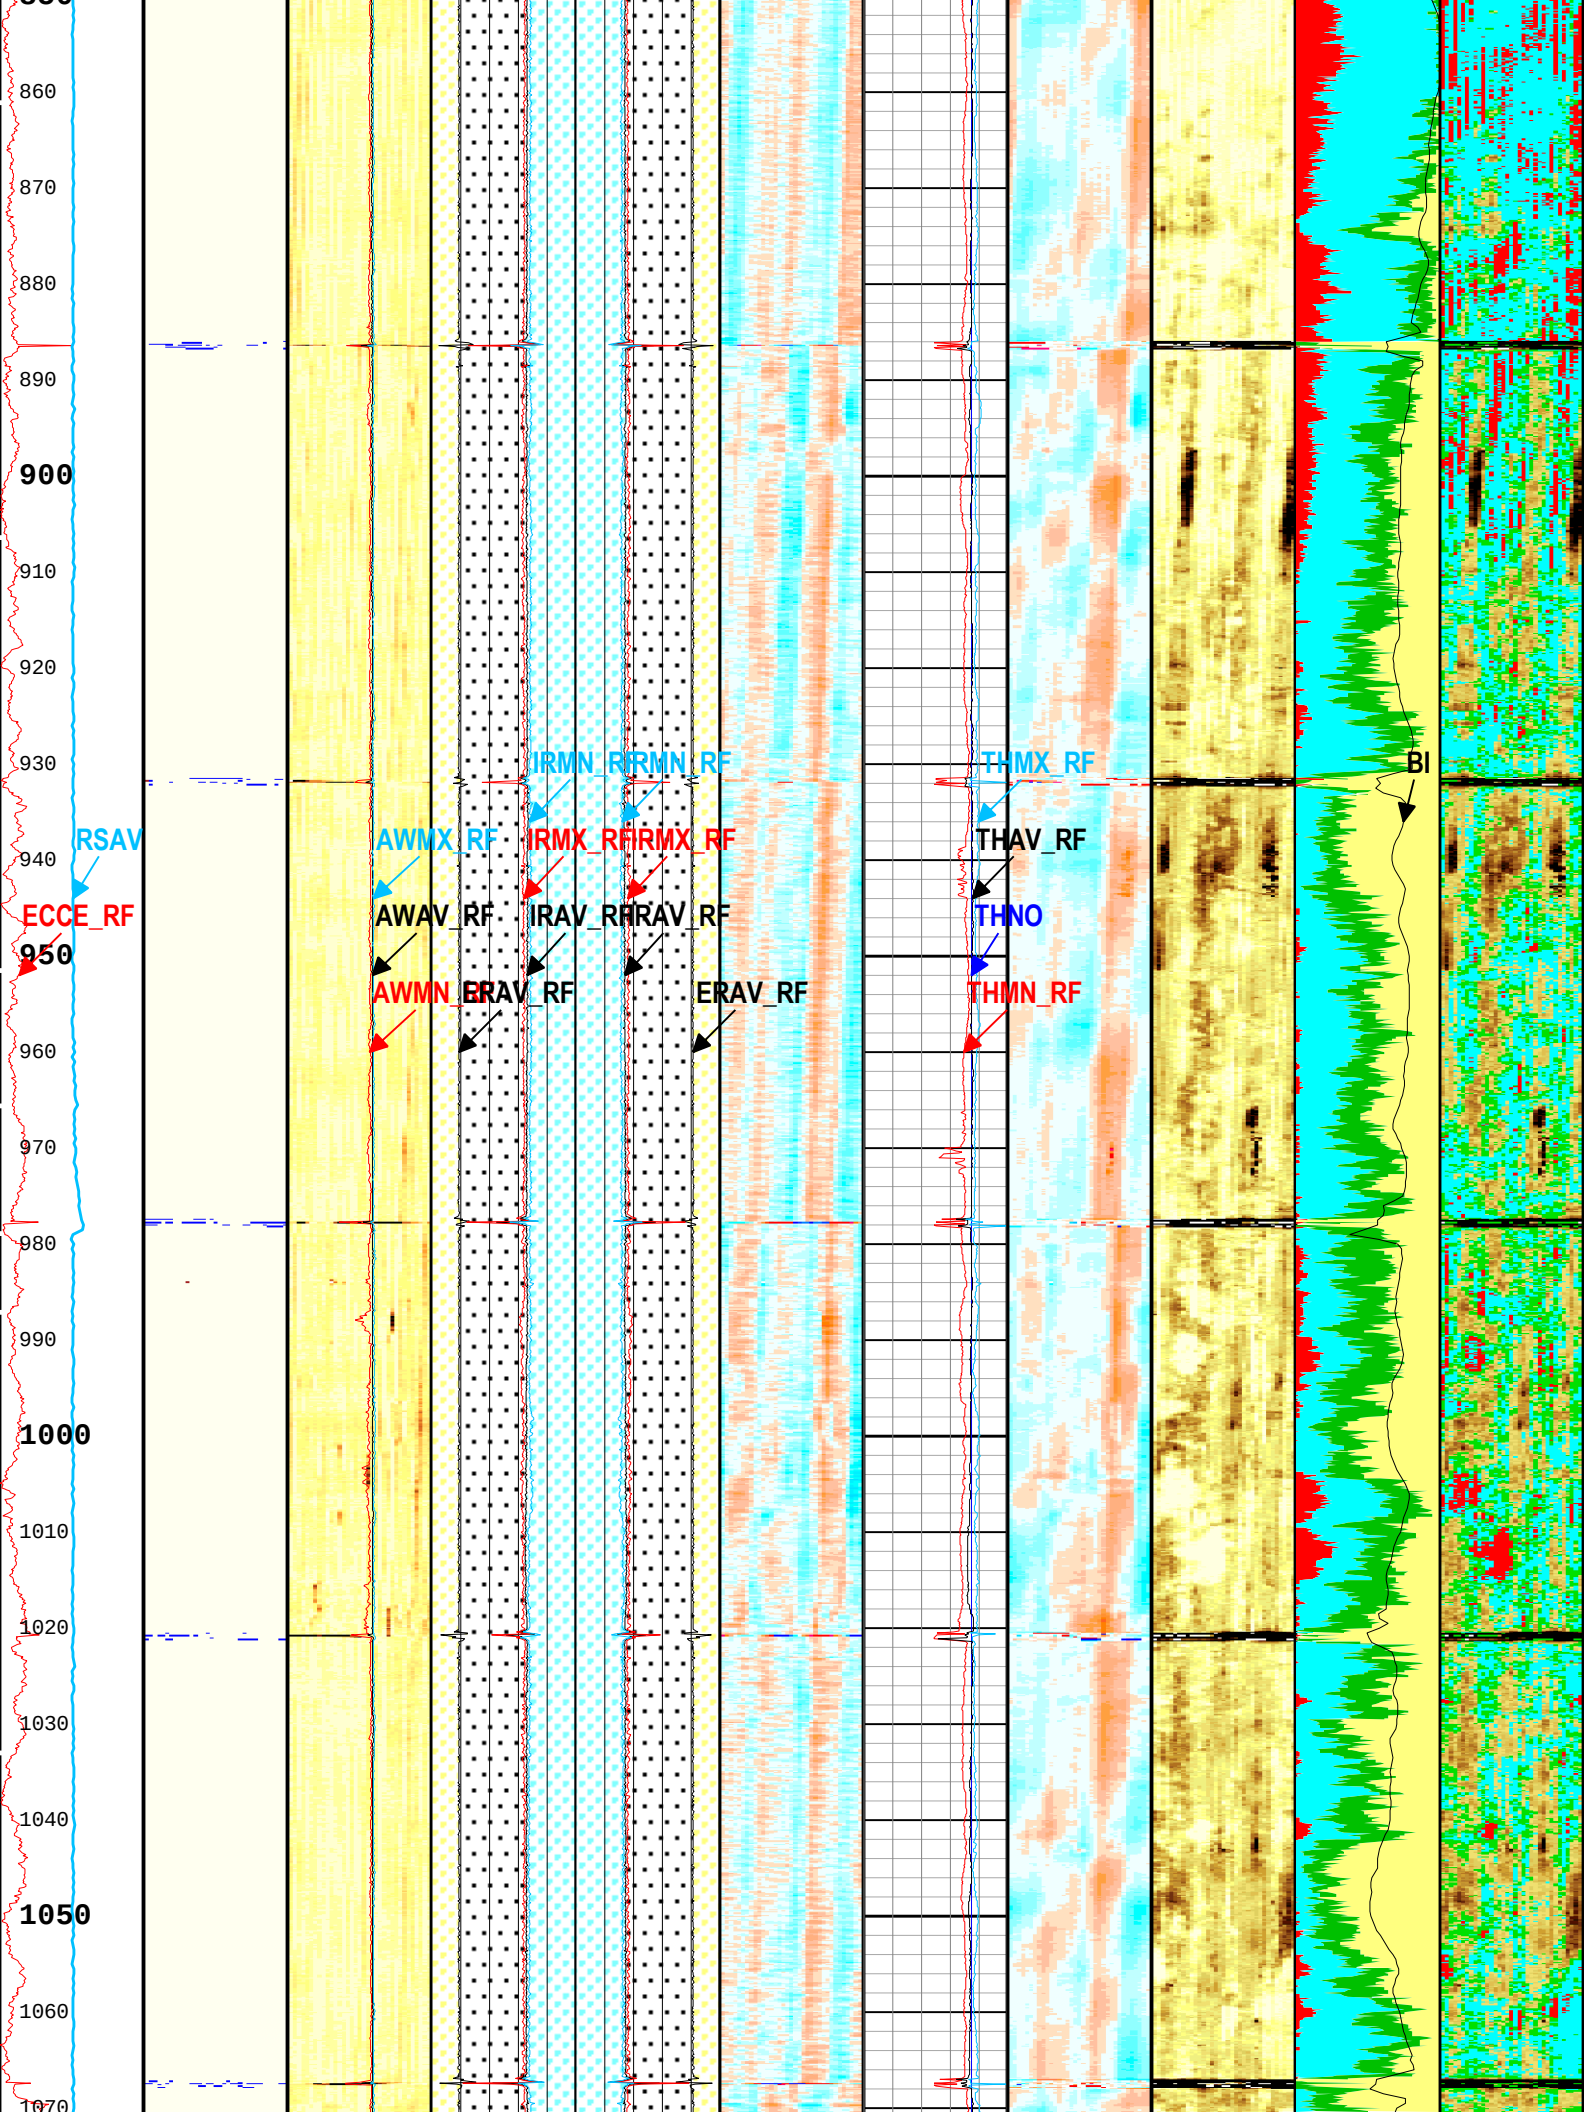
860
870
880
890
900
910
920
930
940
950
960
970
980
990
1000
1010
1020
1030
1040
1050
1060
1070
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
BI

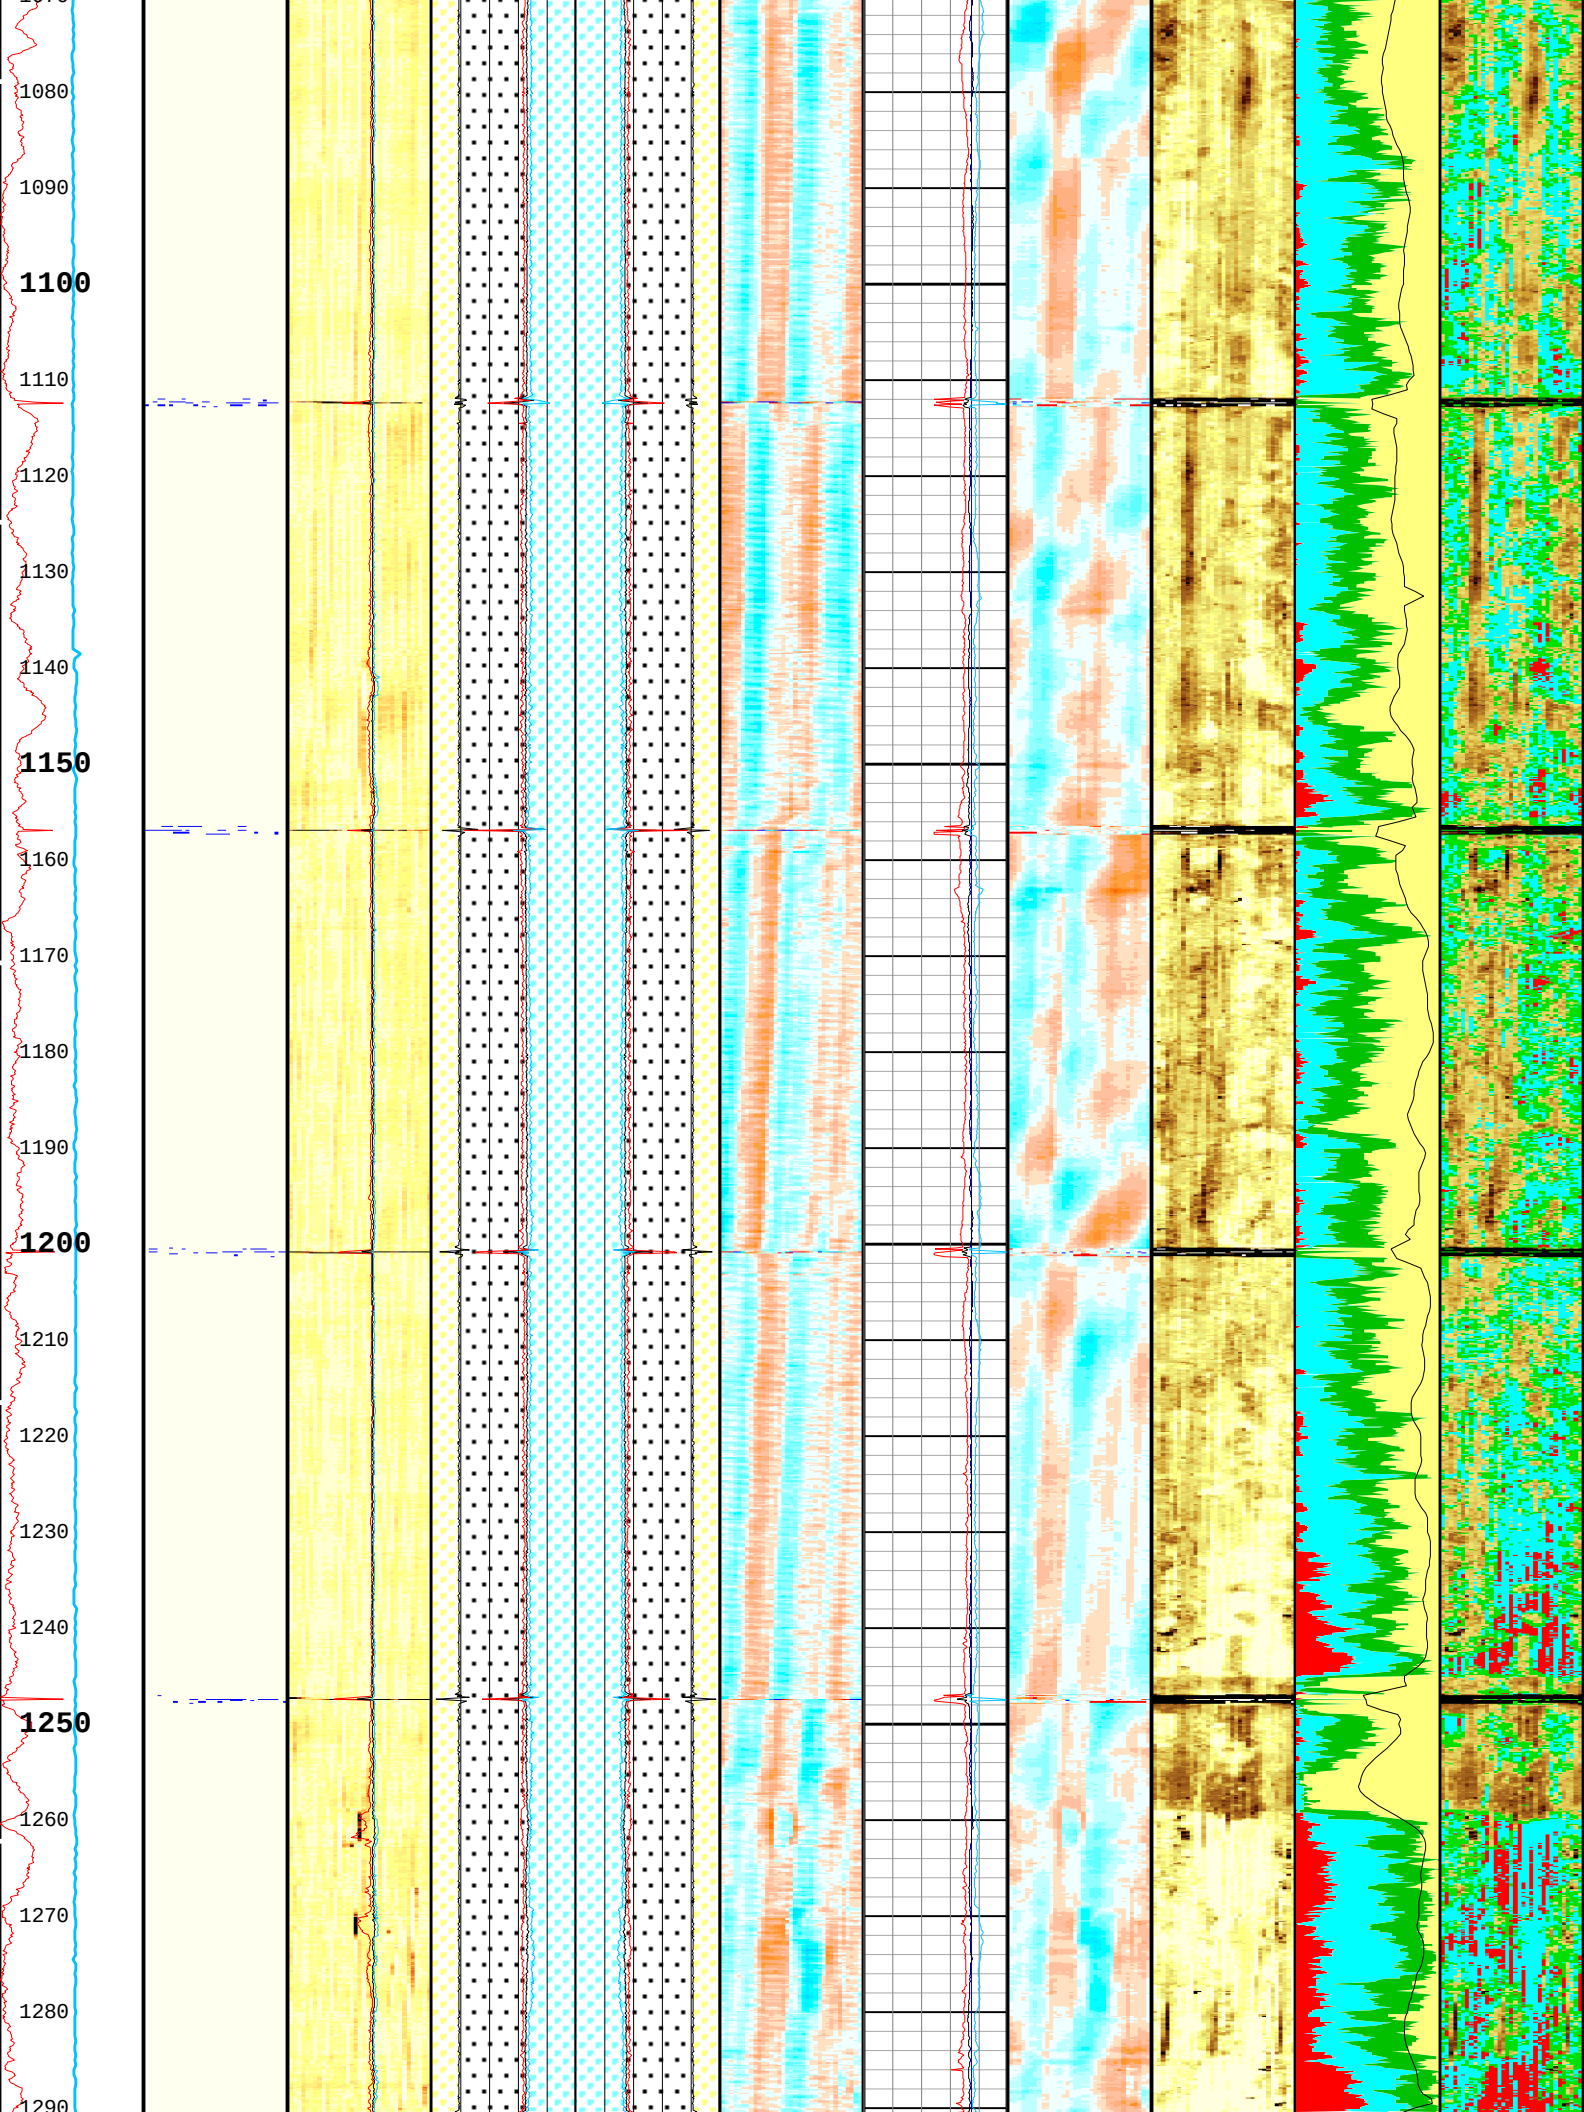
1080
1090
1100
1110
1120
1130
1140
1150
1160
1170
1180
1190
1200
1210
1220
1230
1240
1250
1260
1270
1280
1290

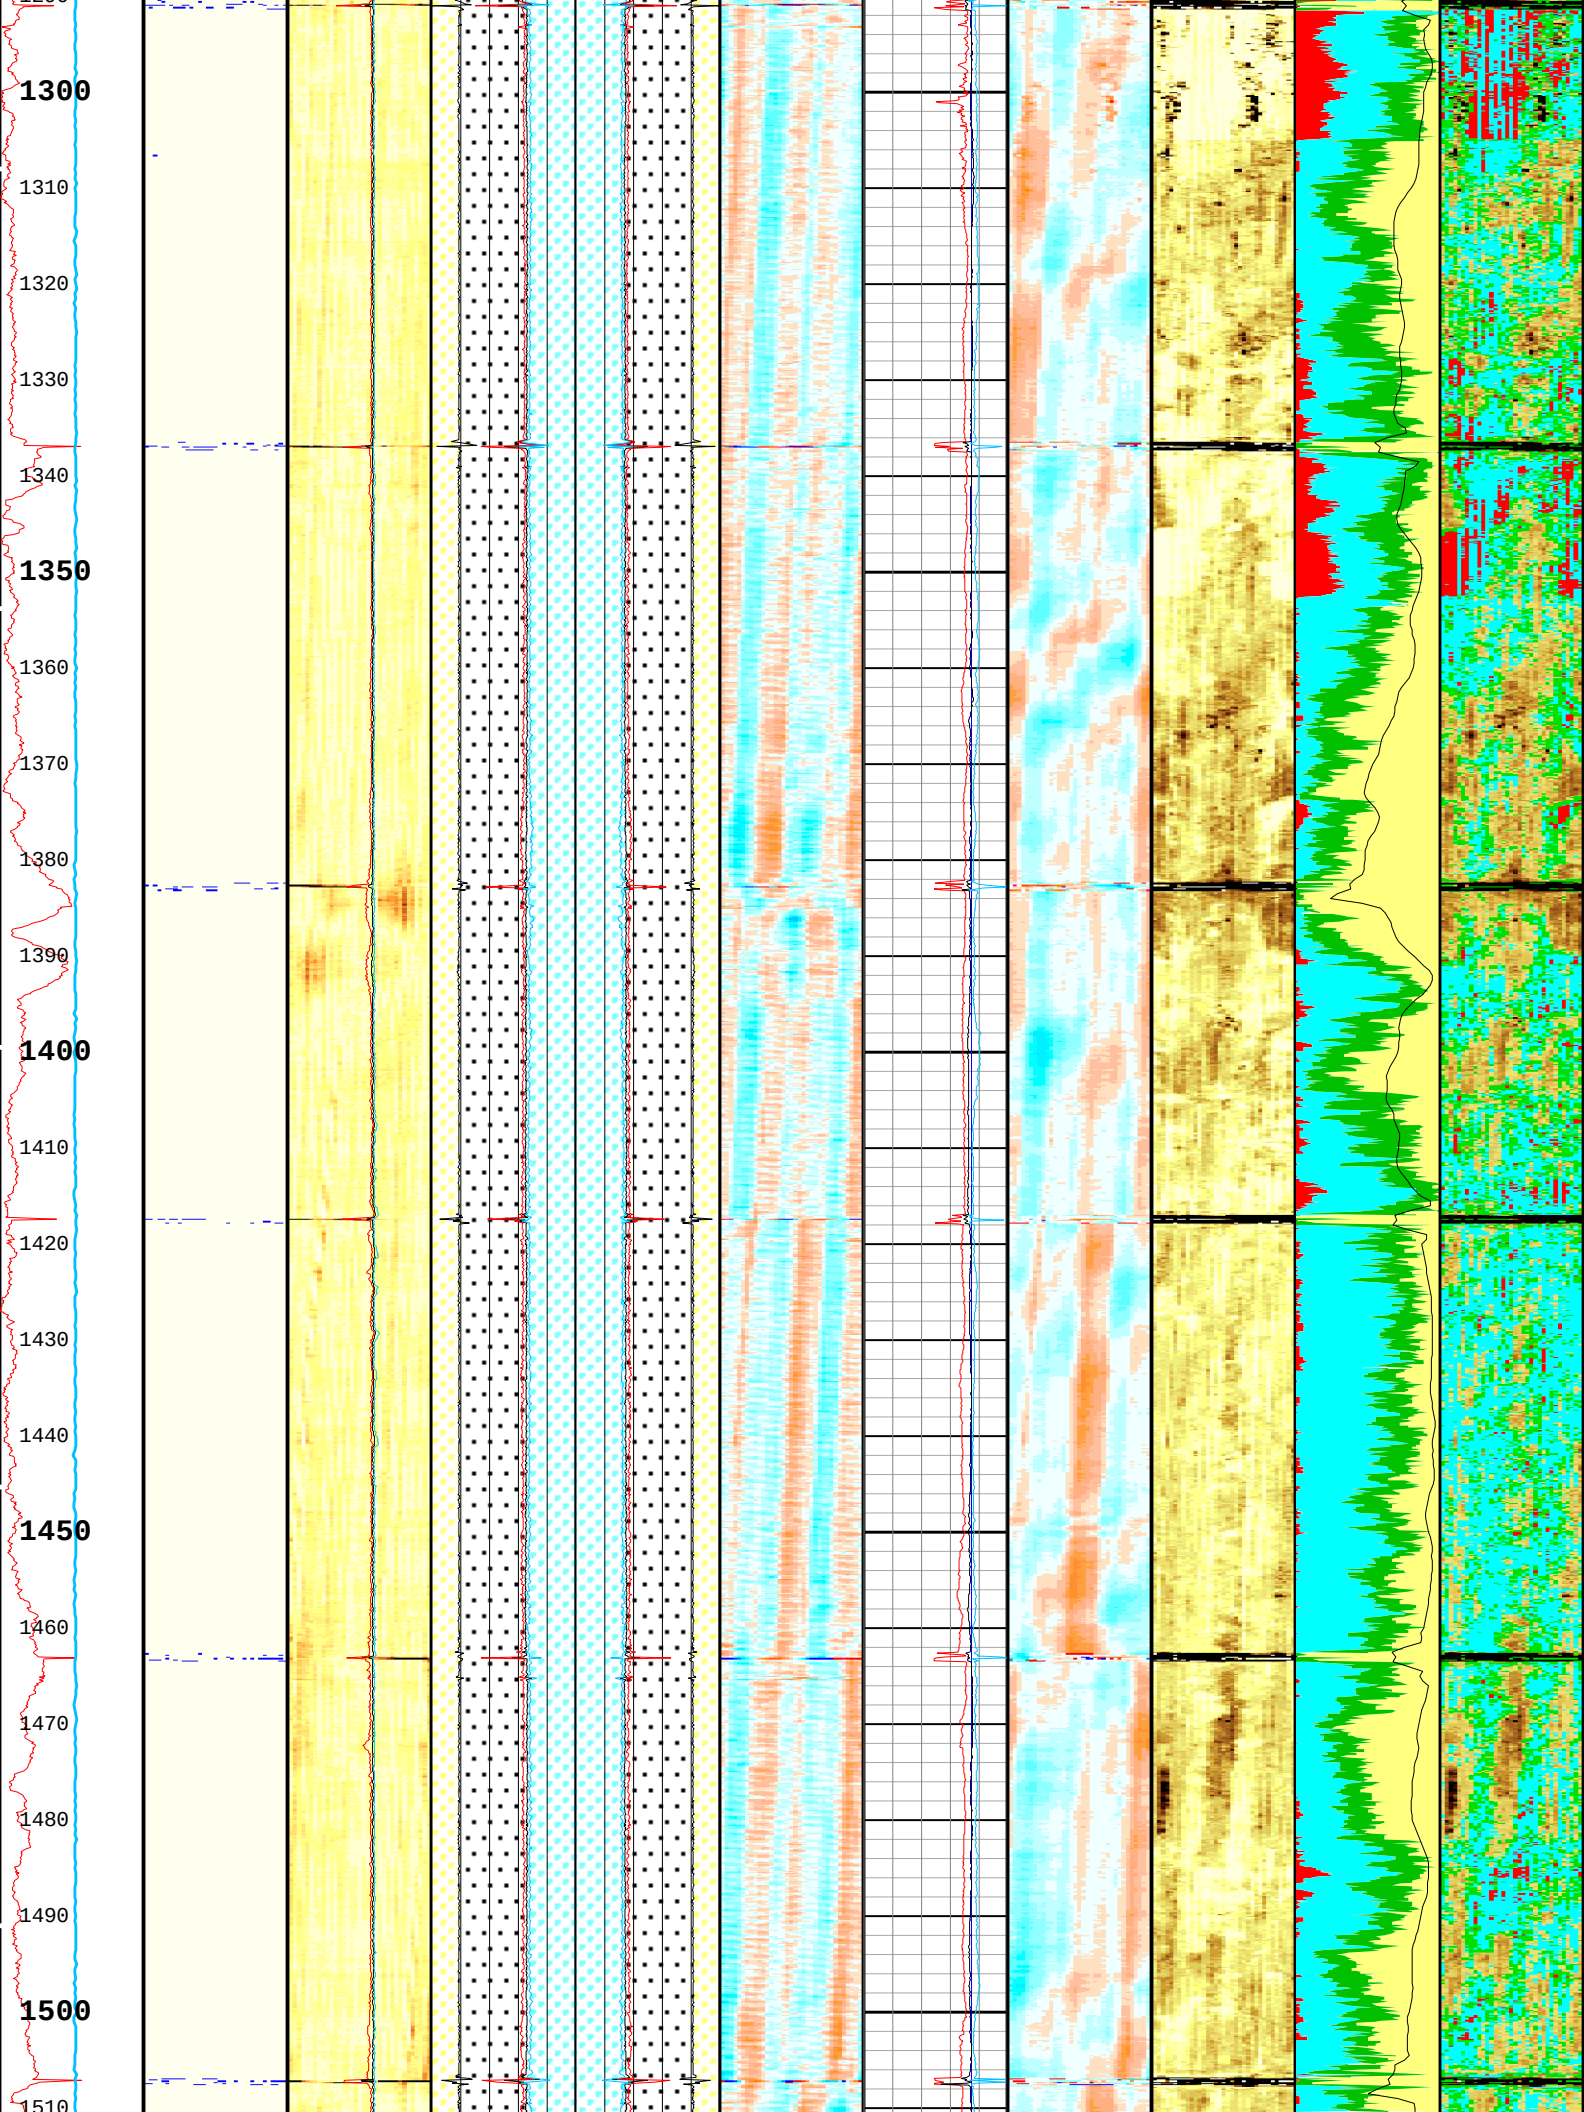
1300
1310
1320
1330
1340
1350
1360
1370
1380
1390
1400
1410
1420
1430
1440
1450
1460
1470
1480
1490
1500
1510

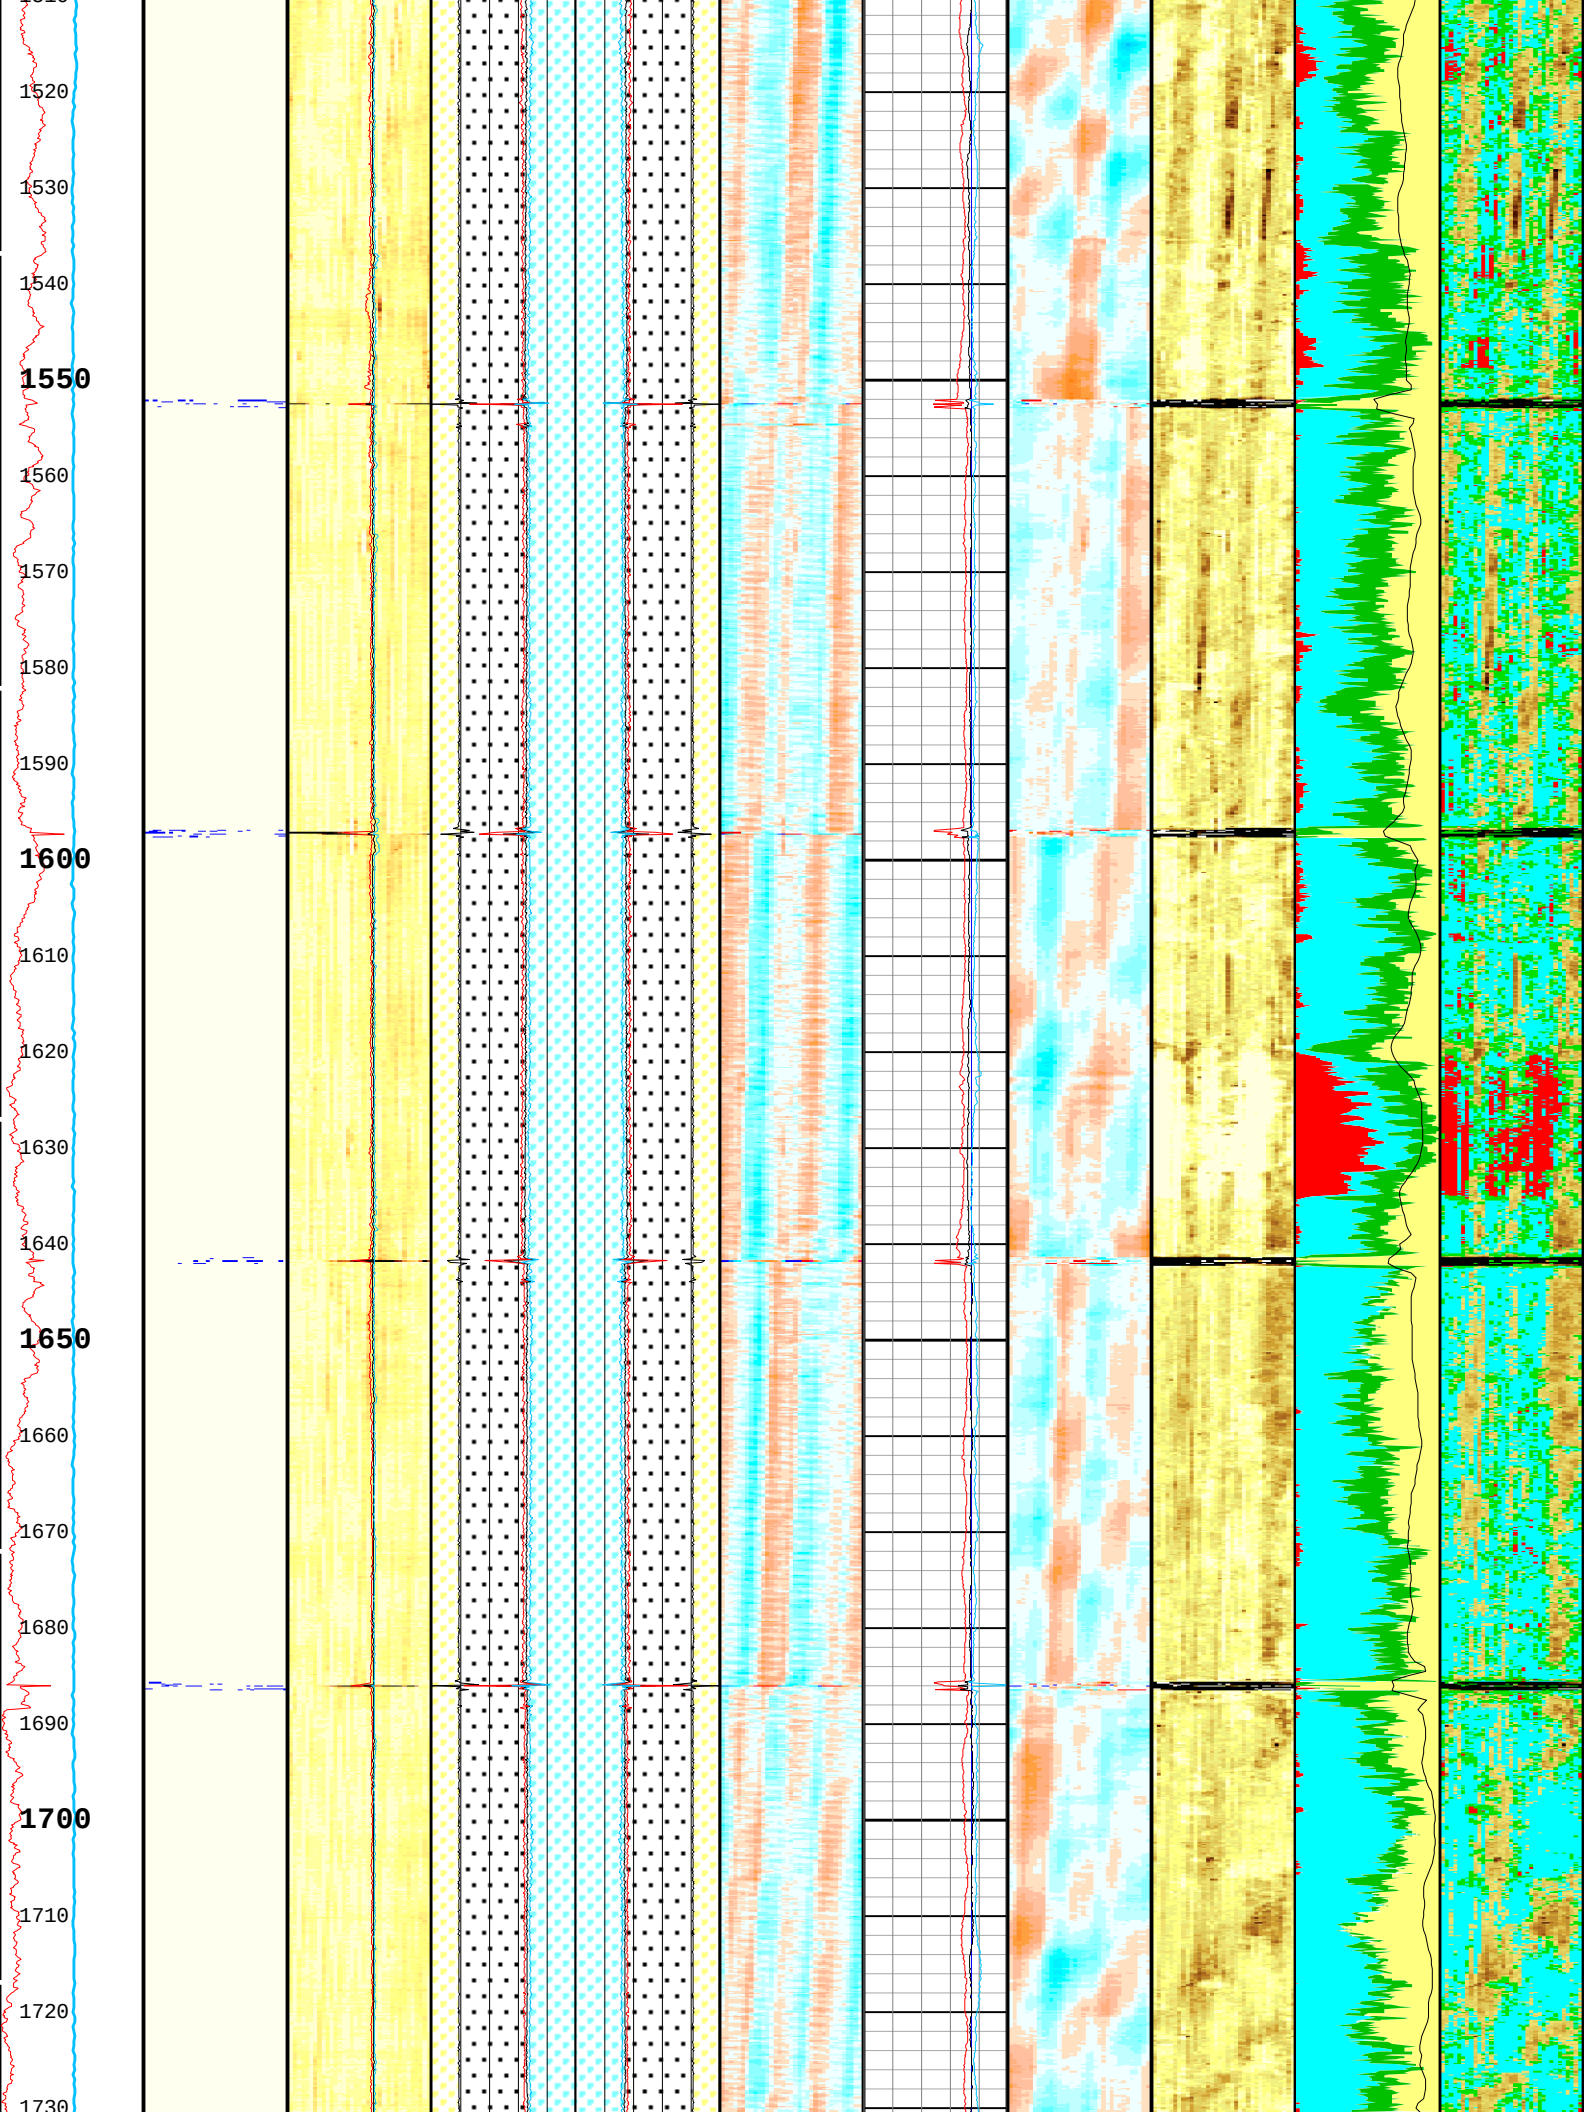
1520
1530
1540
1550
1560
1570
1580
1590
1600
1610
1620
1630
1640
1650
1660
1670
1680
1690
1700
1710
1720
1730

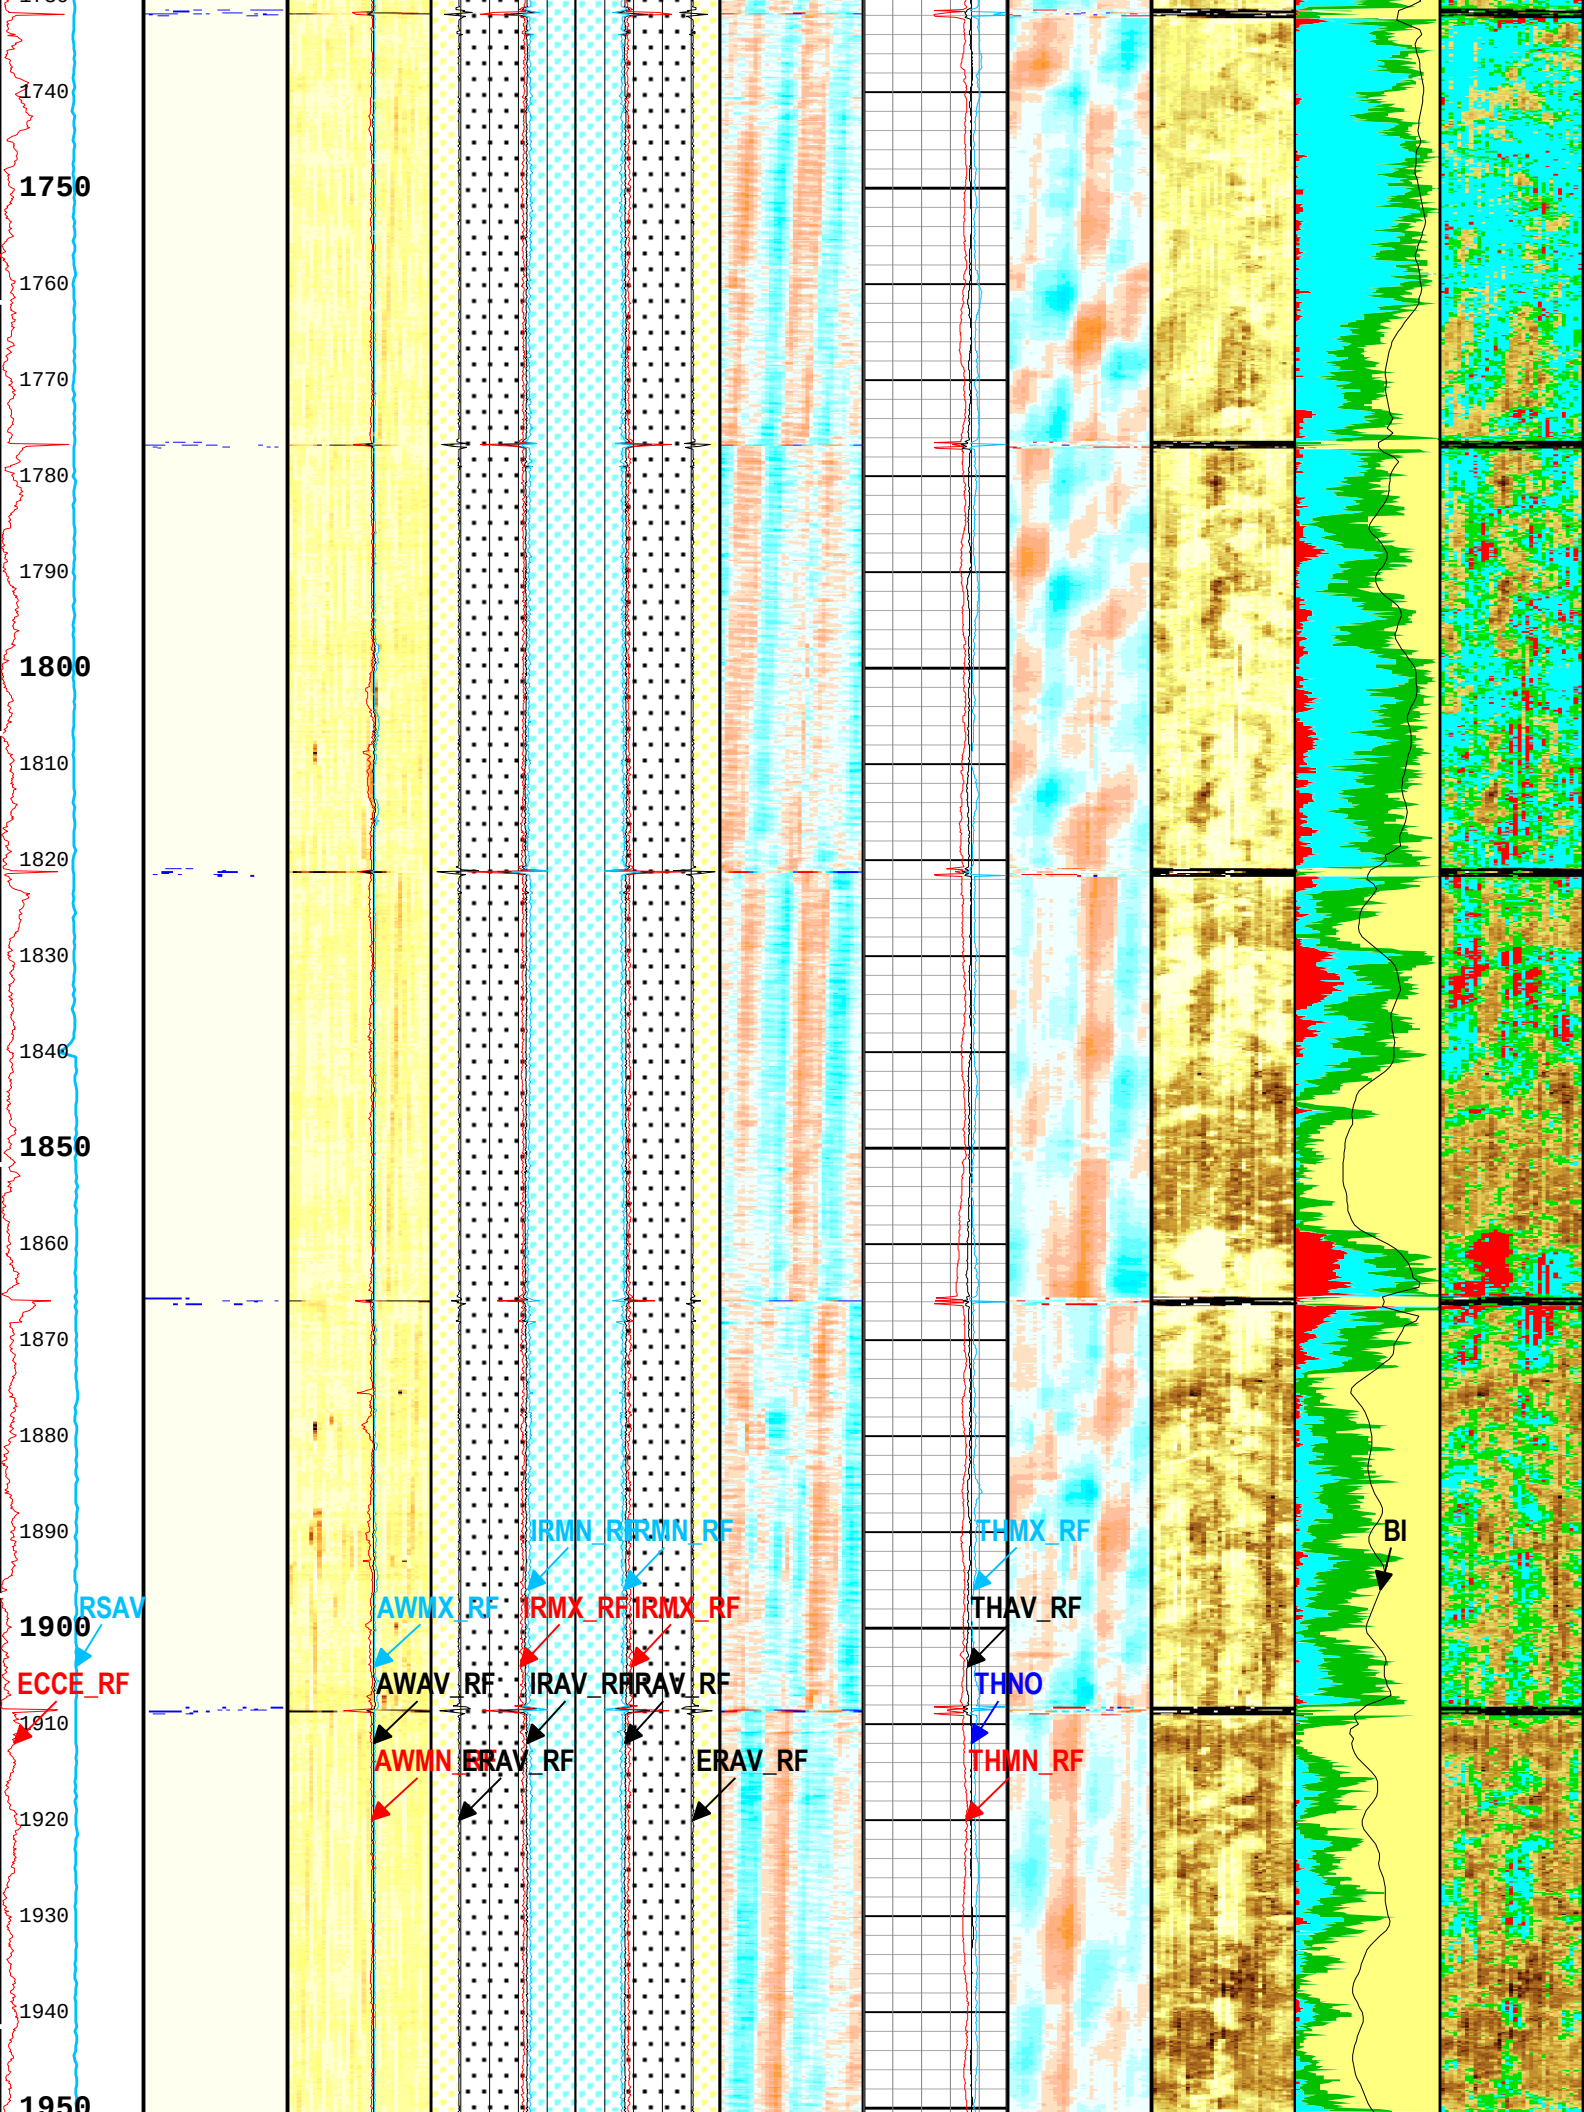
1740
1750
1760
1770
1780
1790
1800
1810
1820
1830
1840
1850
1860
1870
1880
1890
1900
1910
1920
1930
1940
1950
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
BI

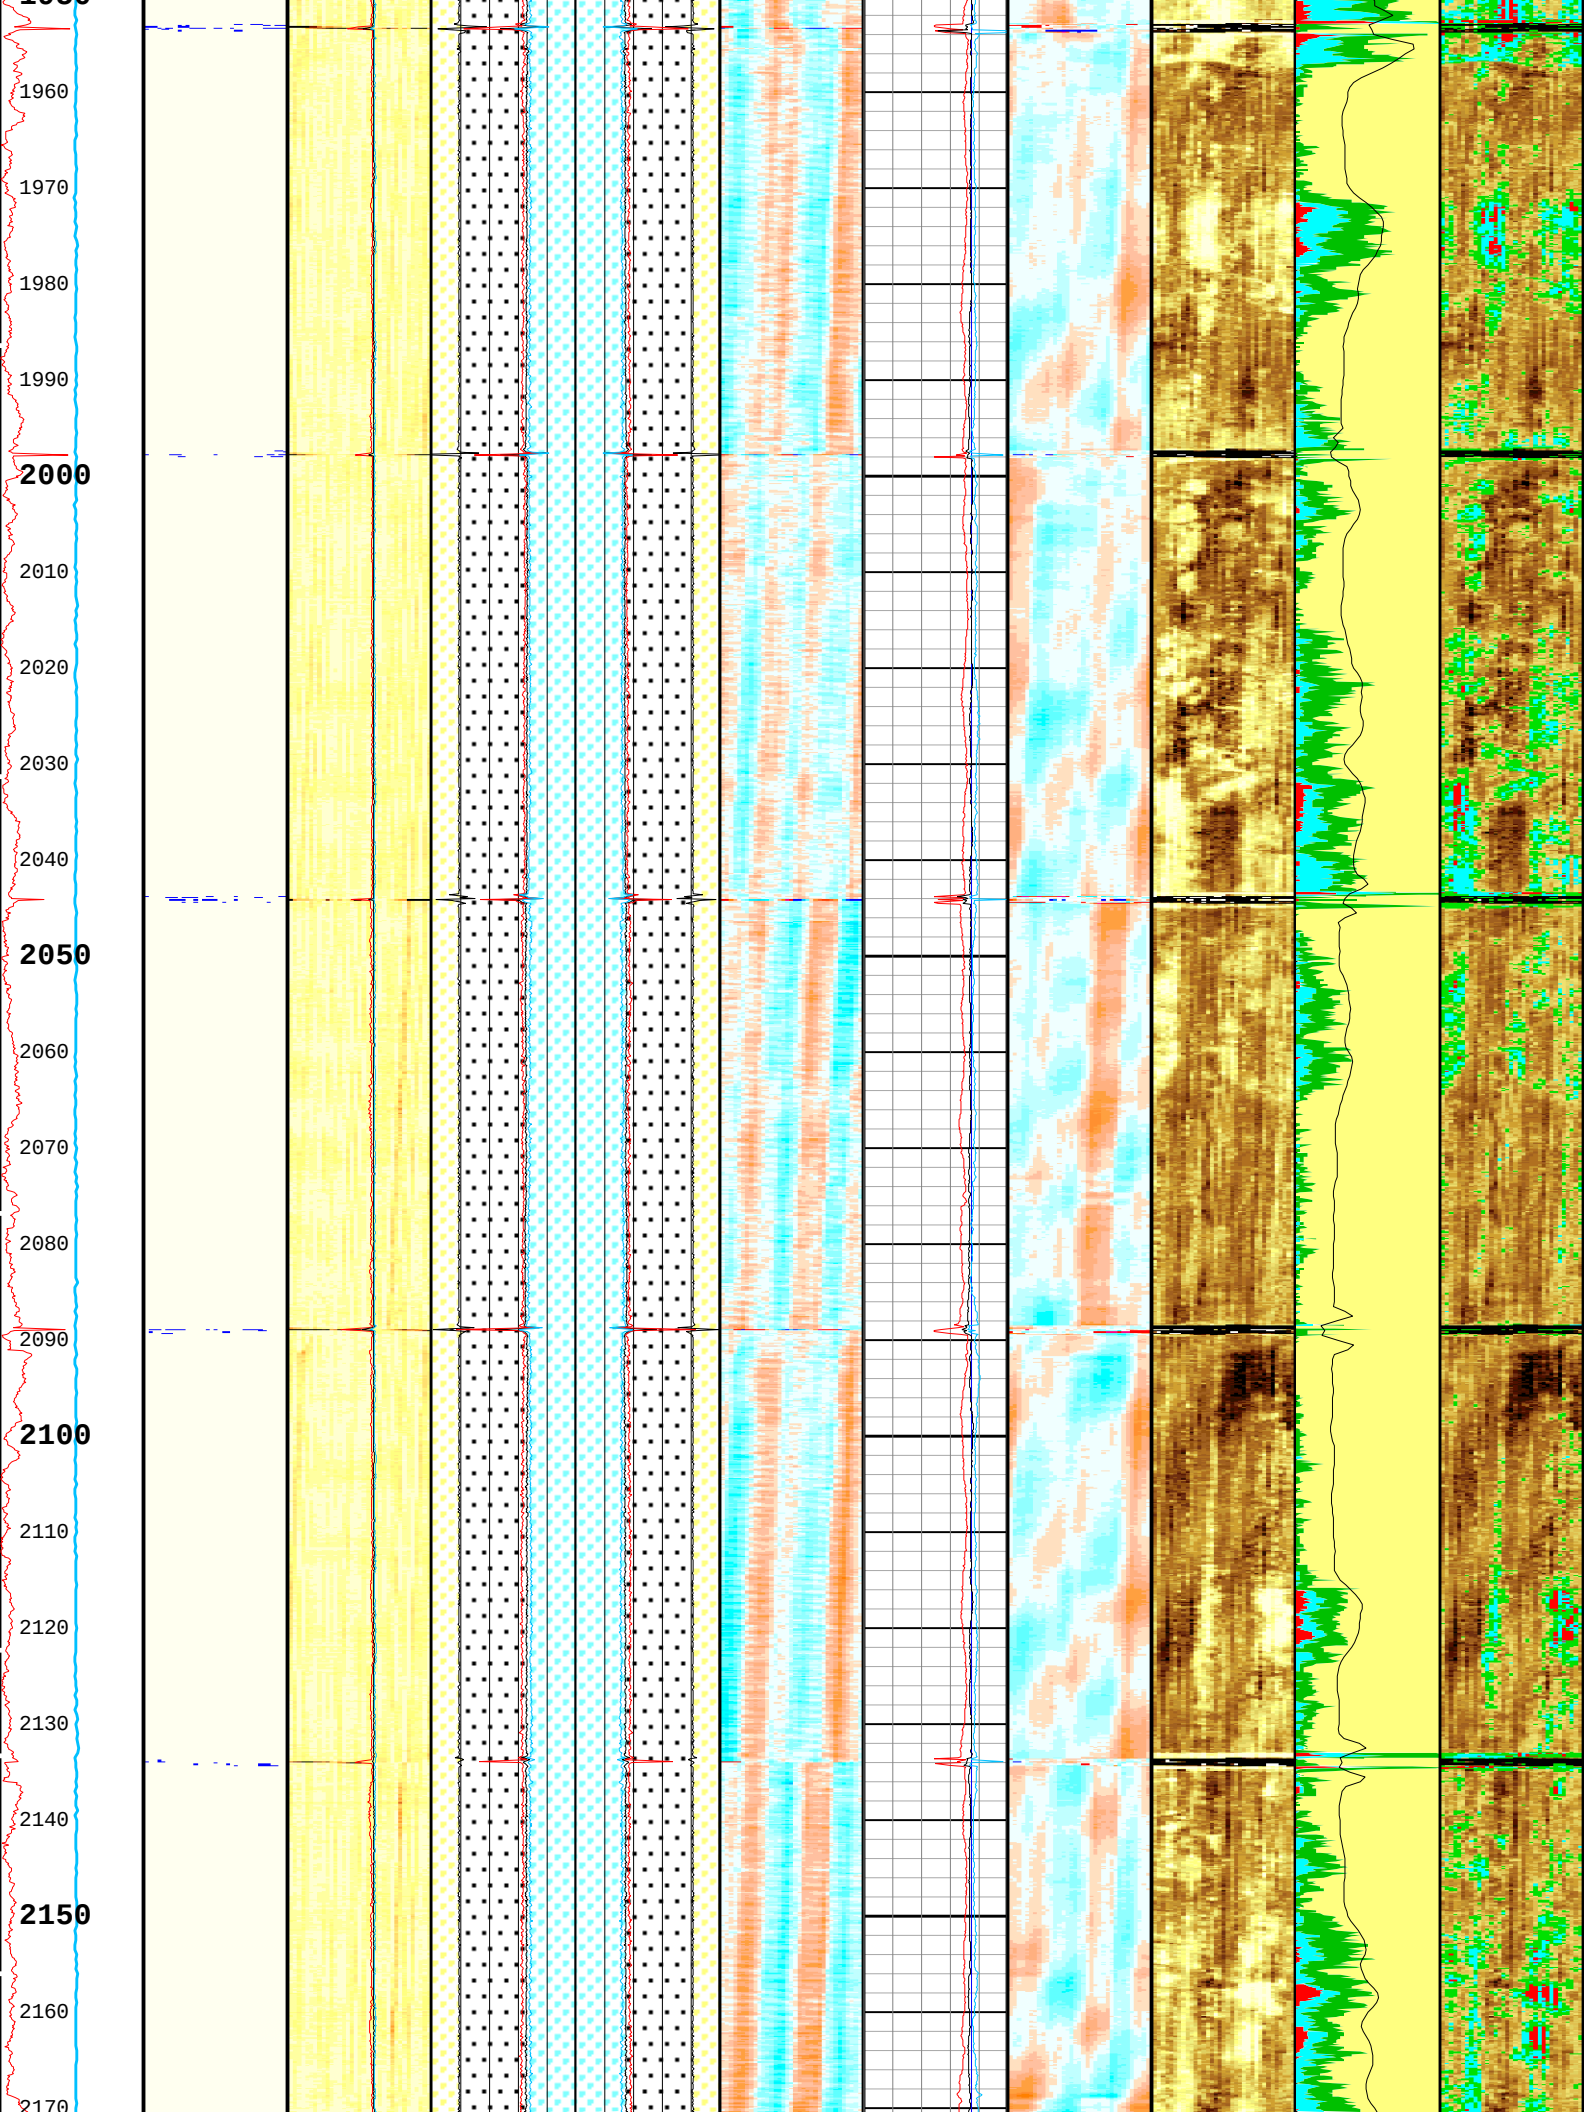
1960
1970
1980
1990
2000
2010
2020
2030
2040
2050
2060
2070
2080
2090
2100
2110
2120
2130
2140
2150
2160
2170

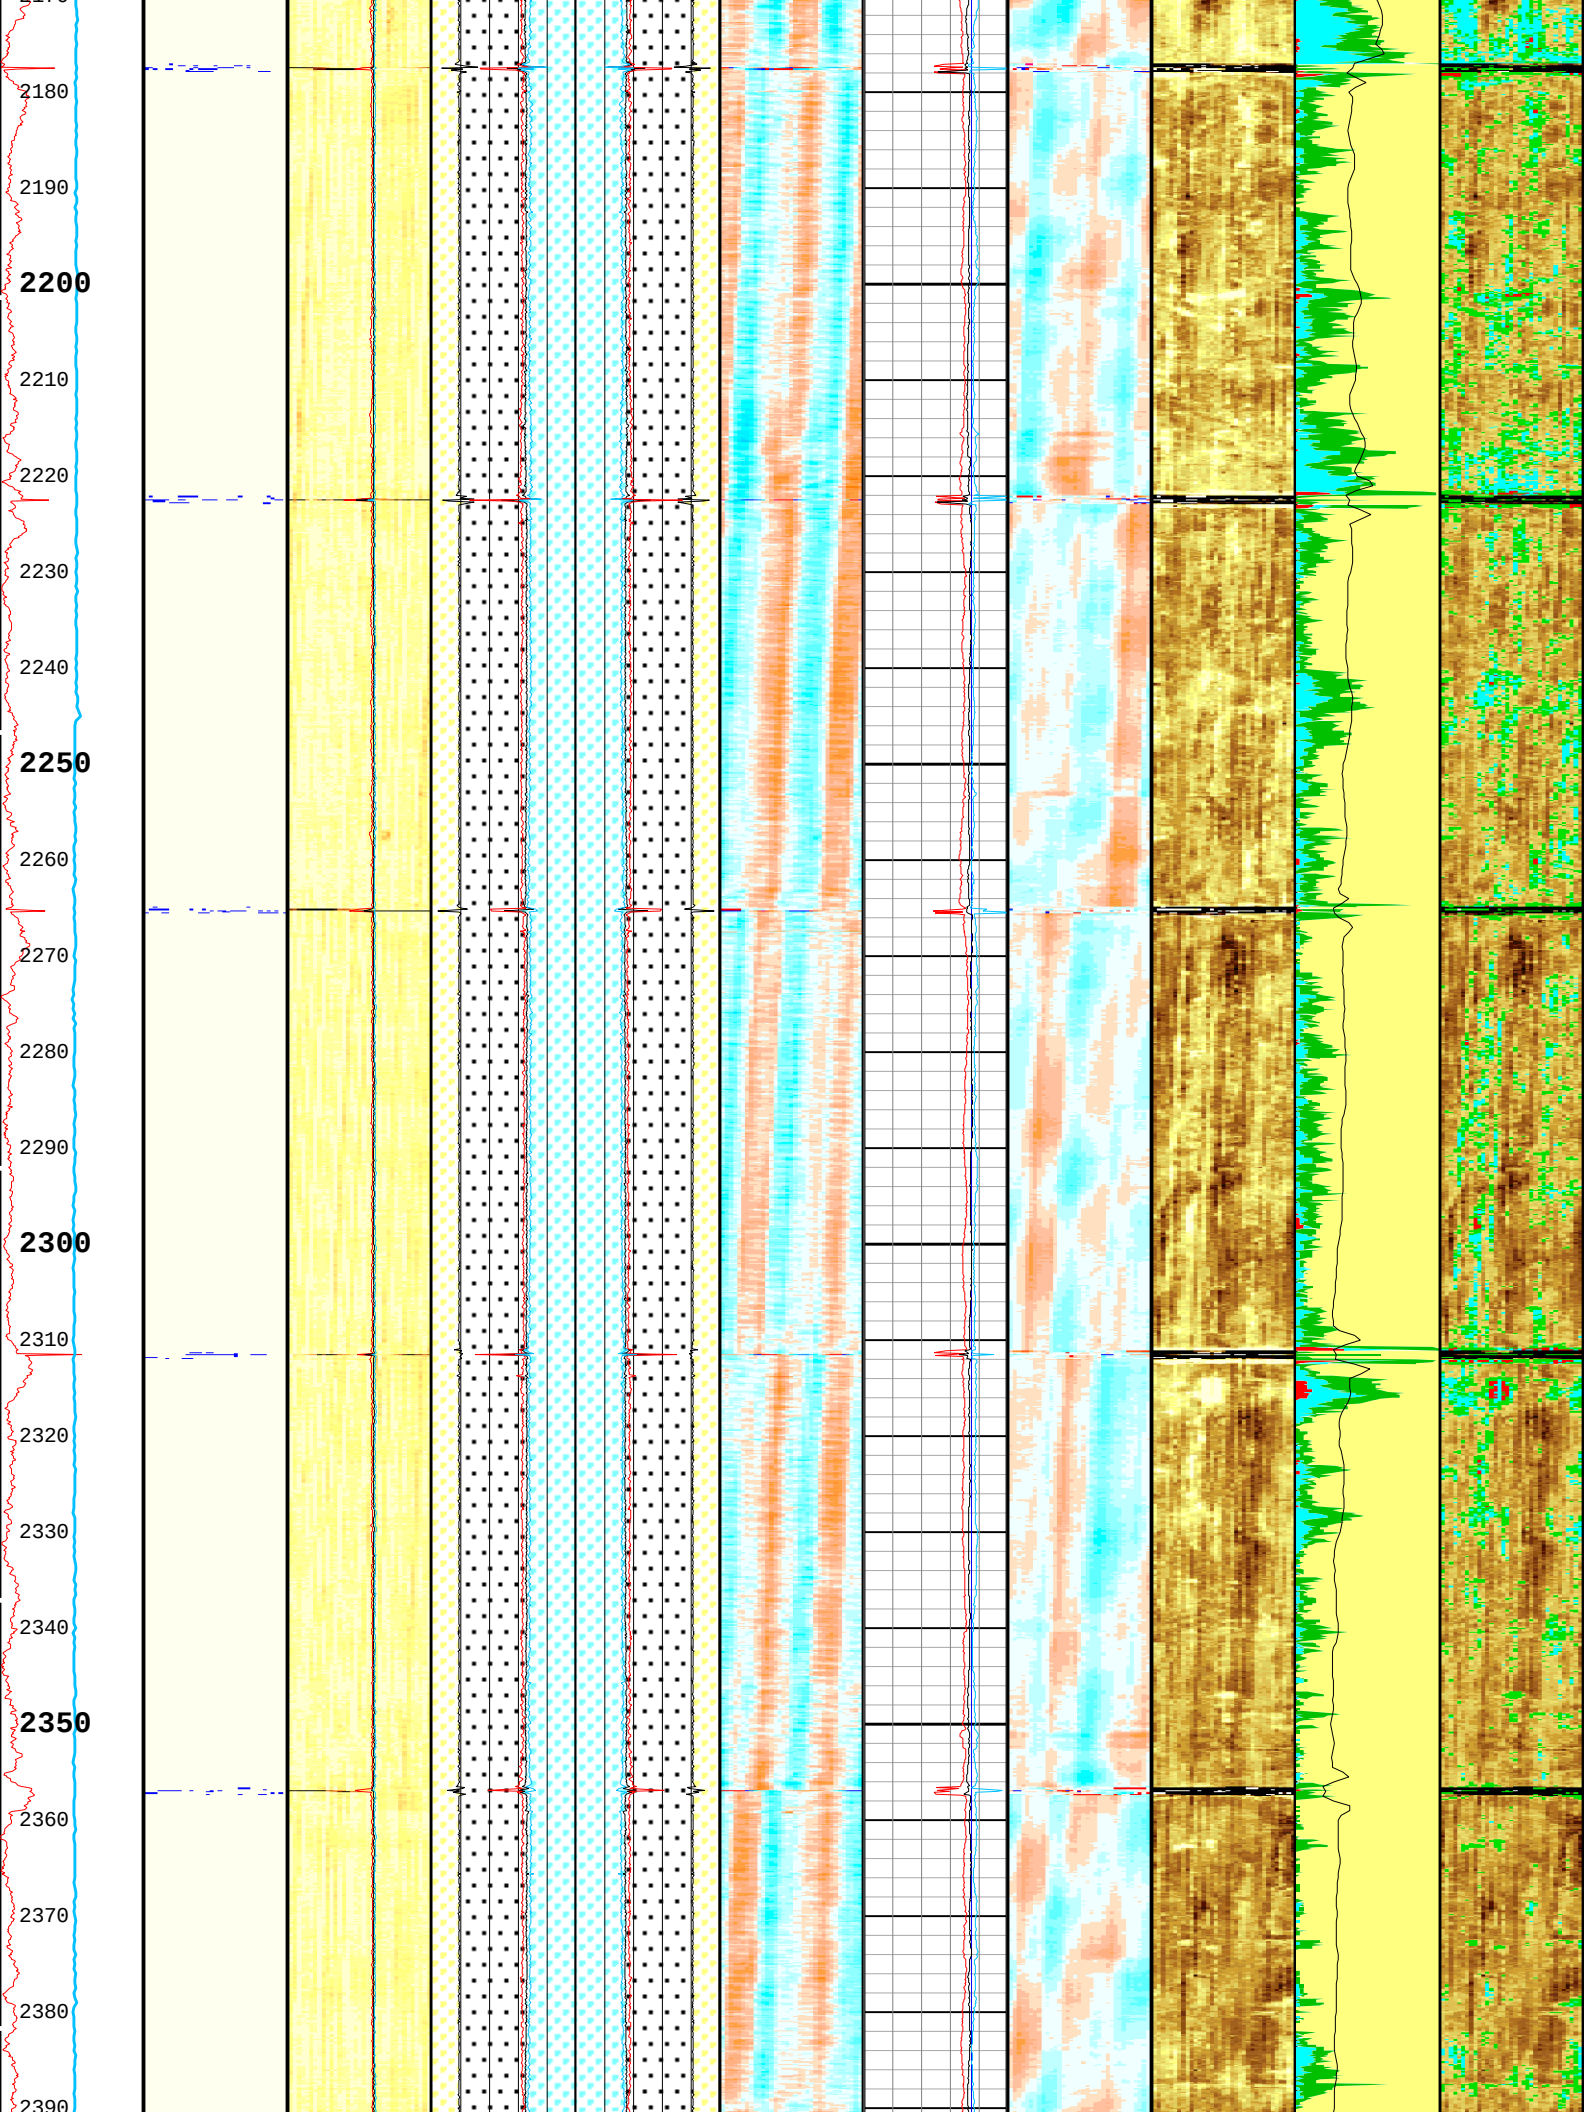
2180
2190
2200
2210
2220
2230
2240
2250
2260
2270
2280
2290
2300
2310
2320
2330
2340
2350
2360
2370
2380
2390

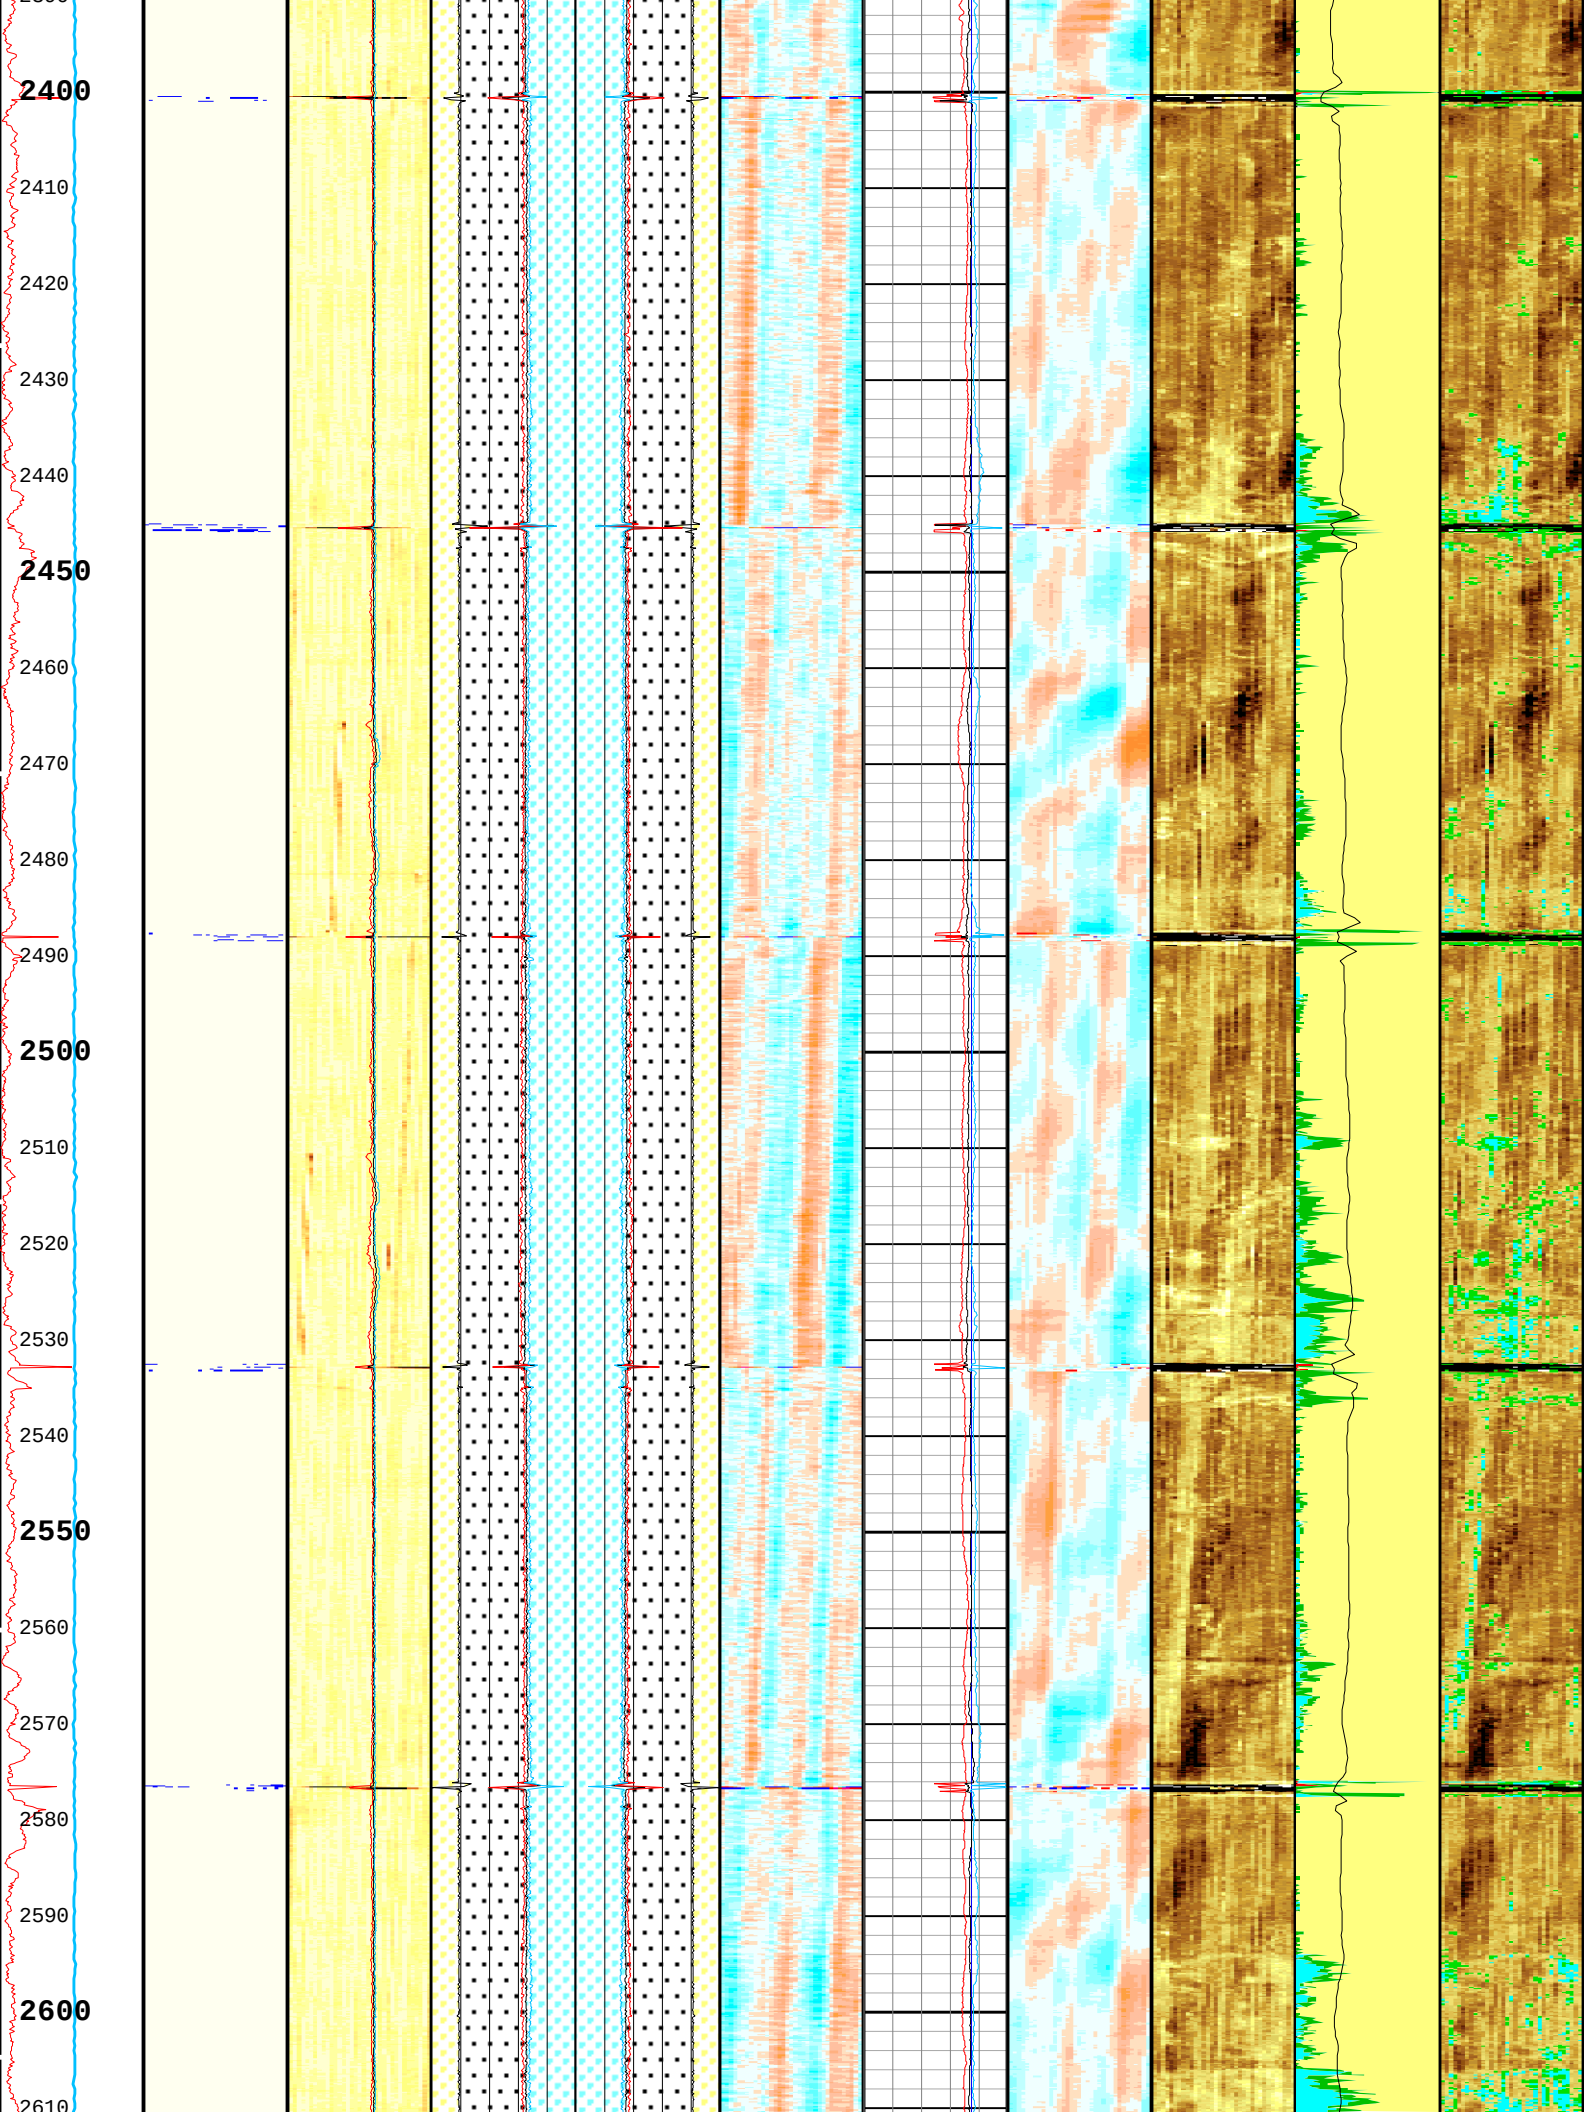
2400
2410
2420
2430
2440
2450
2460
2470
2480
2490
2500
2510
2520
2530
2540
2550
2560
2570
2580
2590
2600
2610

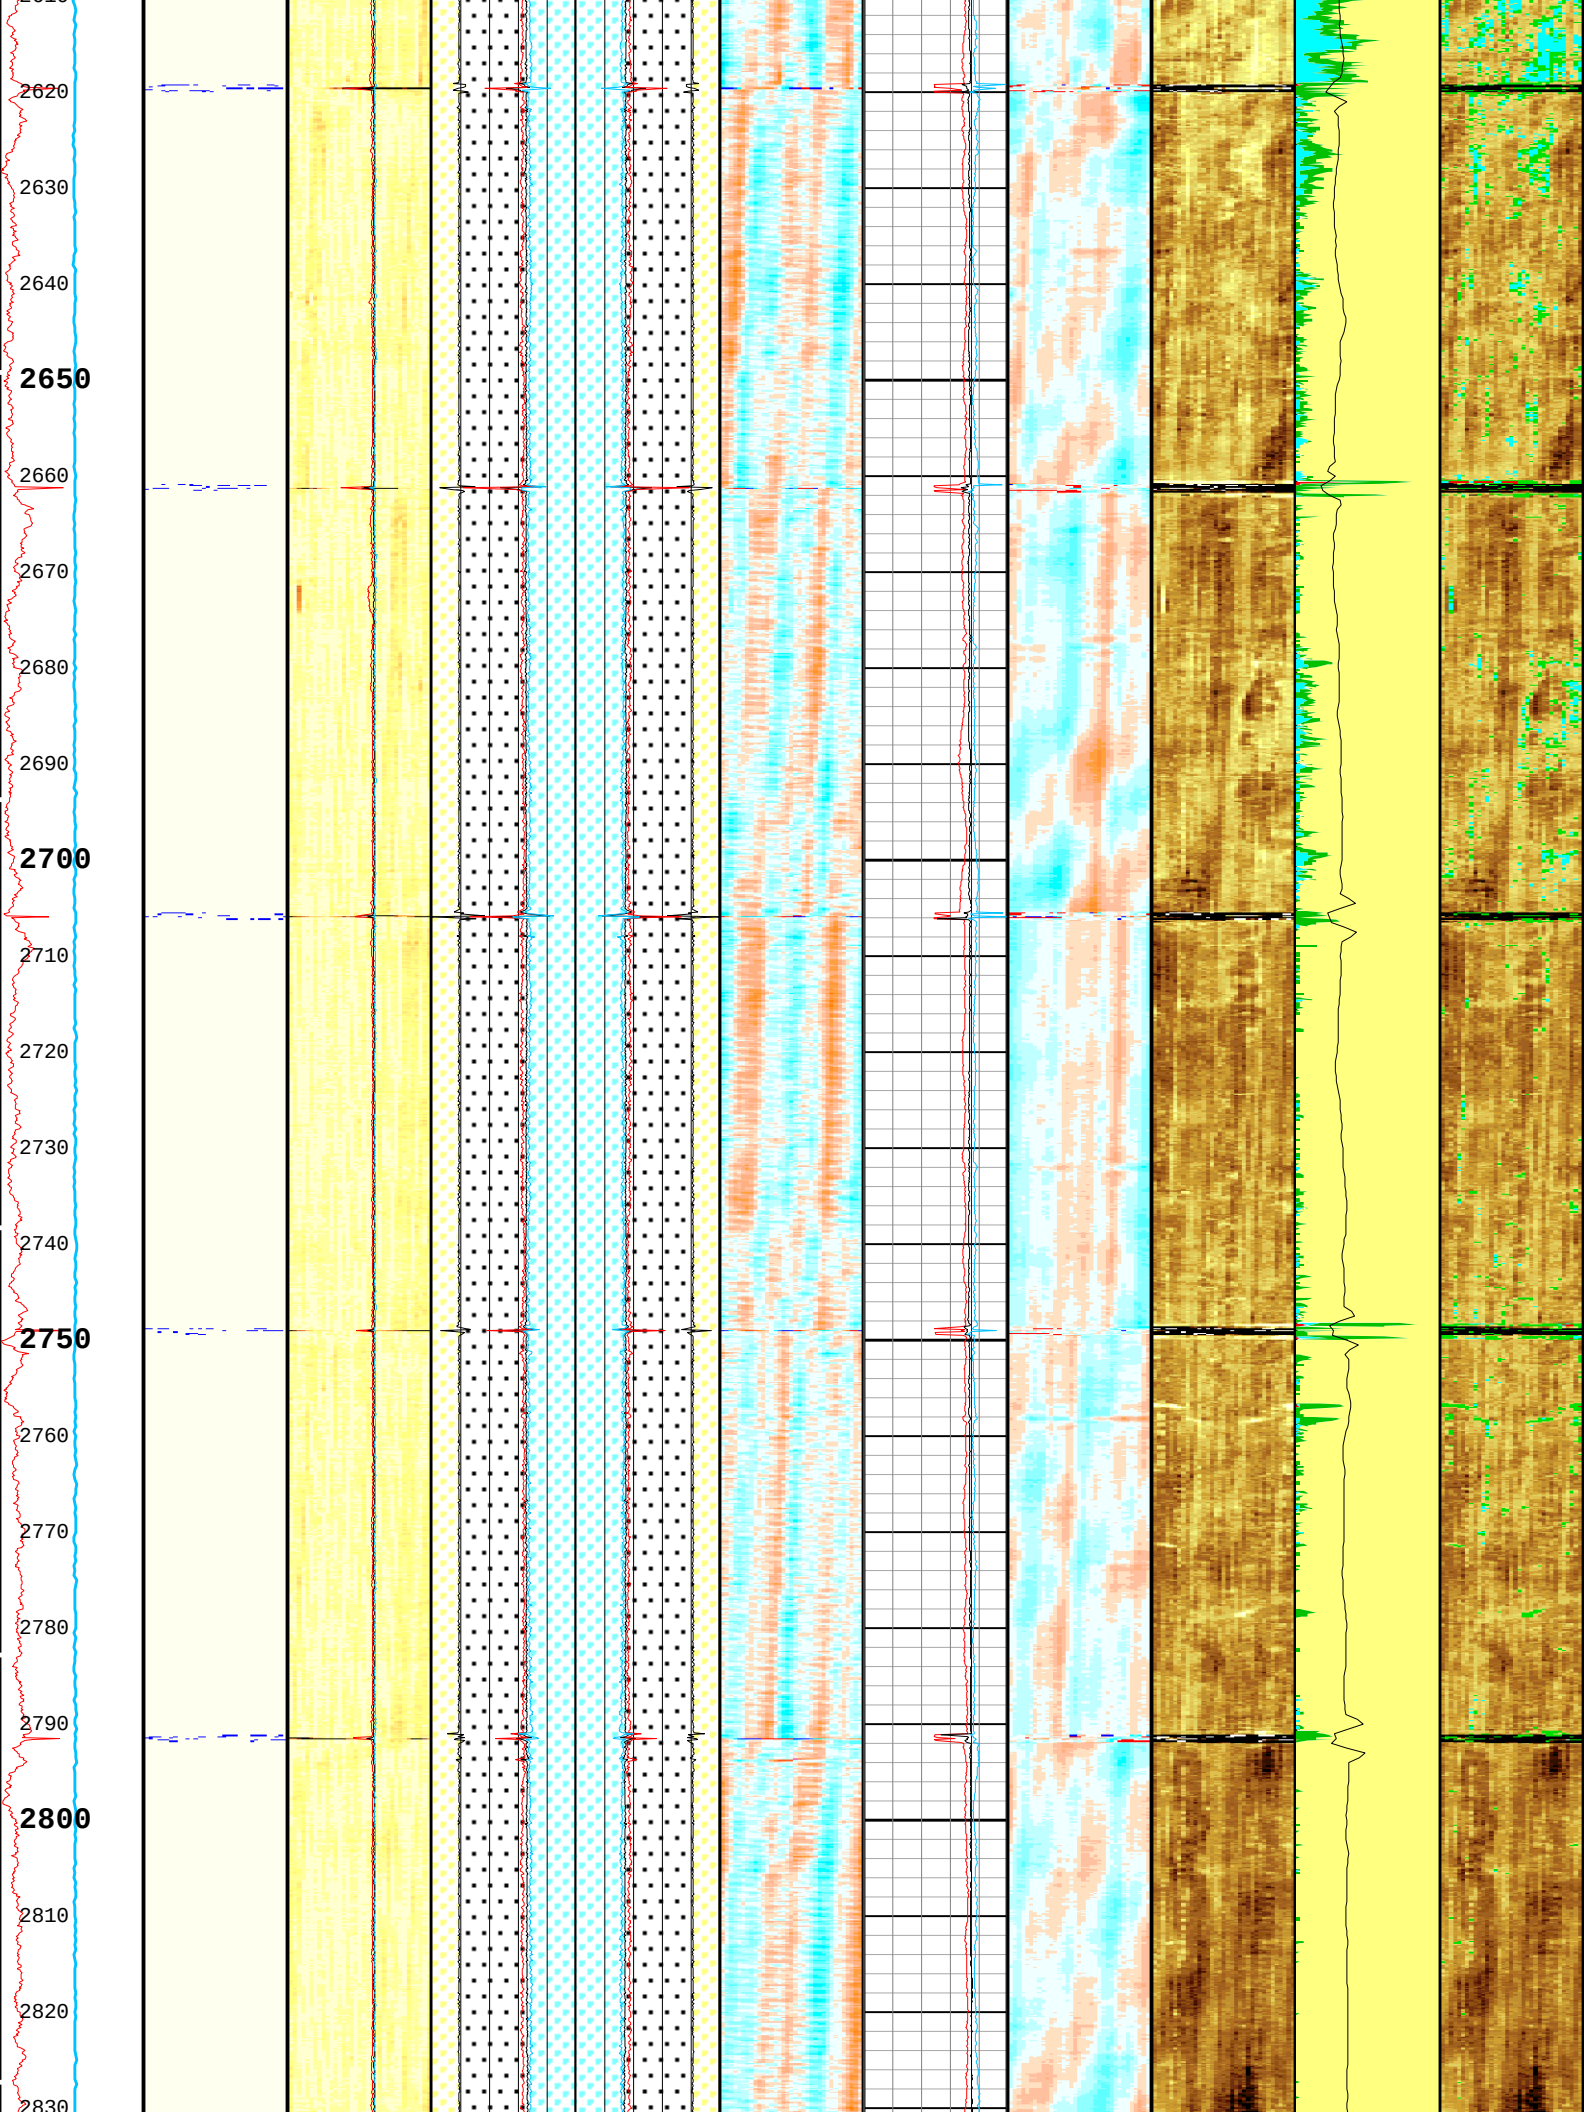
2620
2630
2640
2650
2660
2670
2680
2690
2700
2710
2720
2730
2740
2750
2760
2770
2780
2790
2800
2810
2820
2830

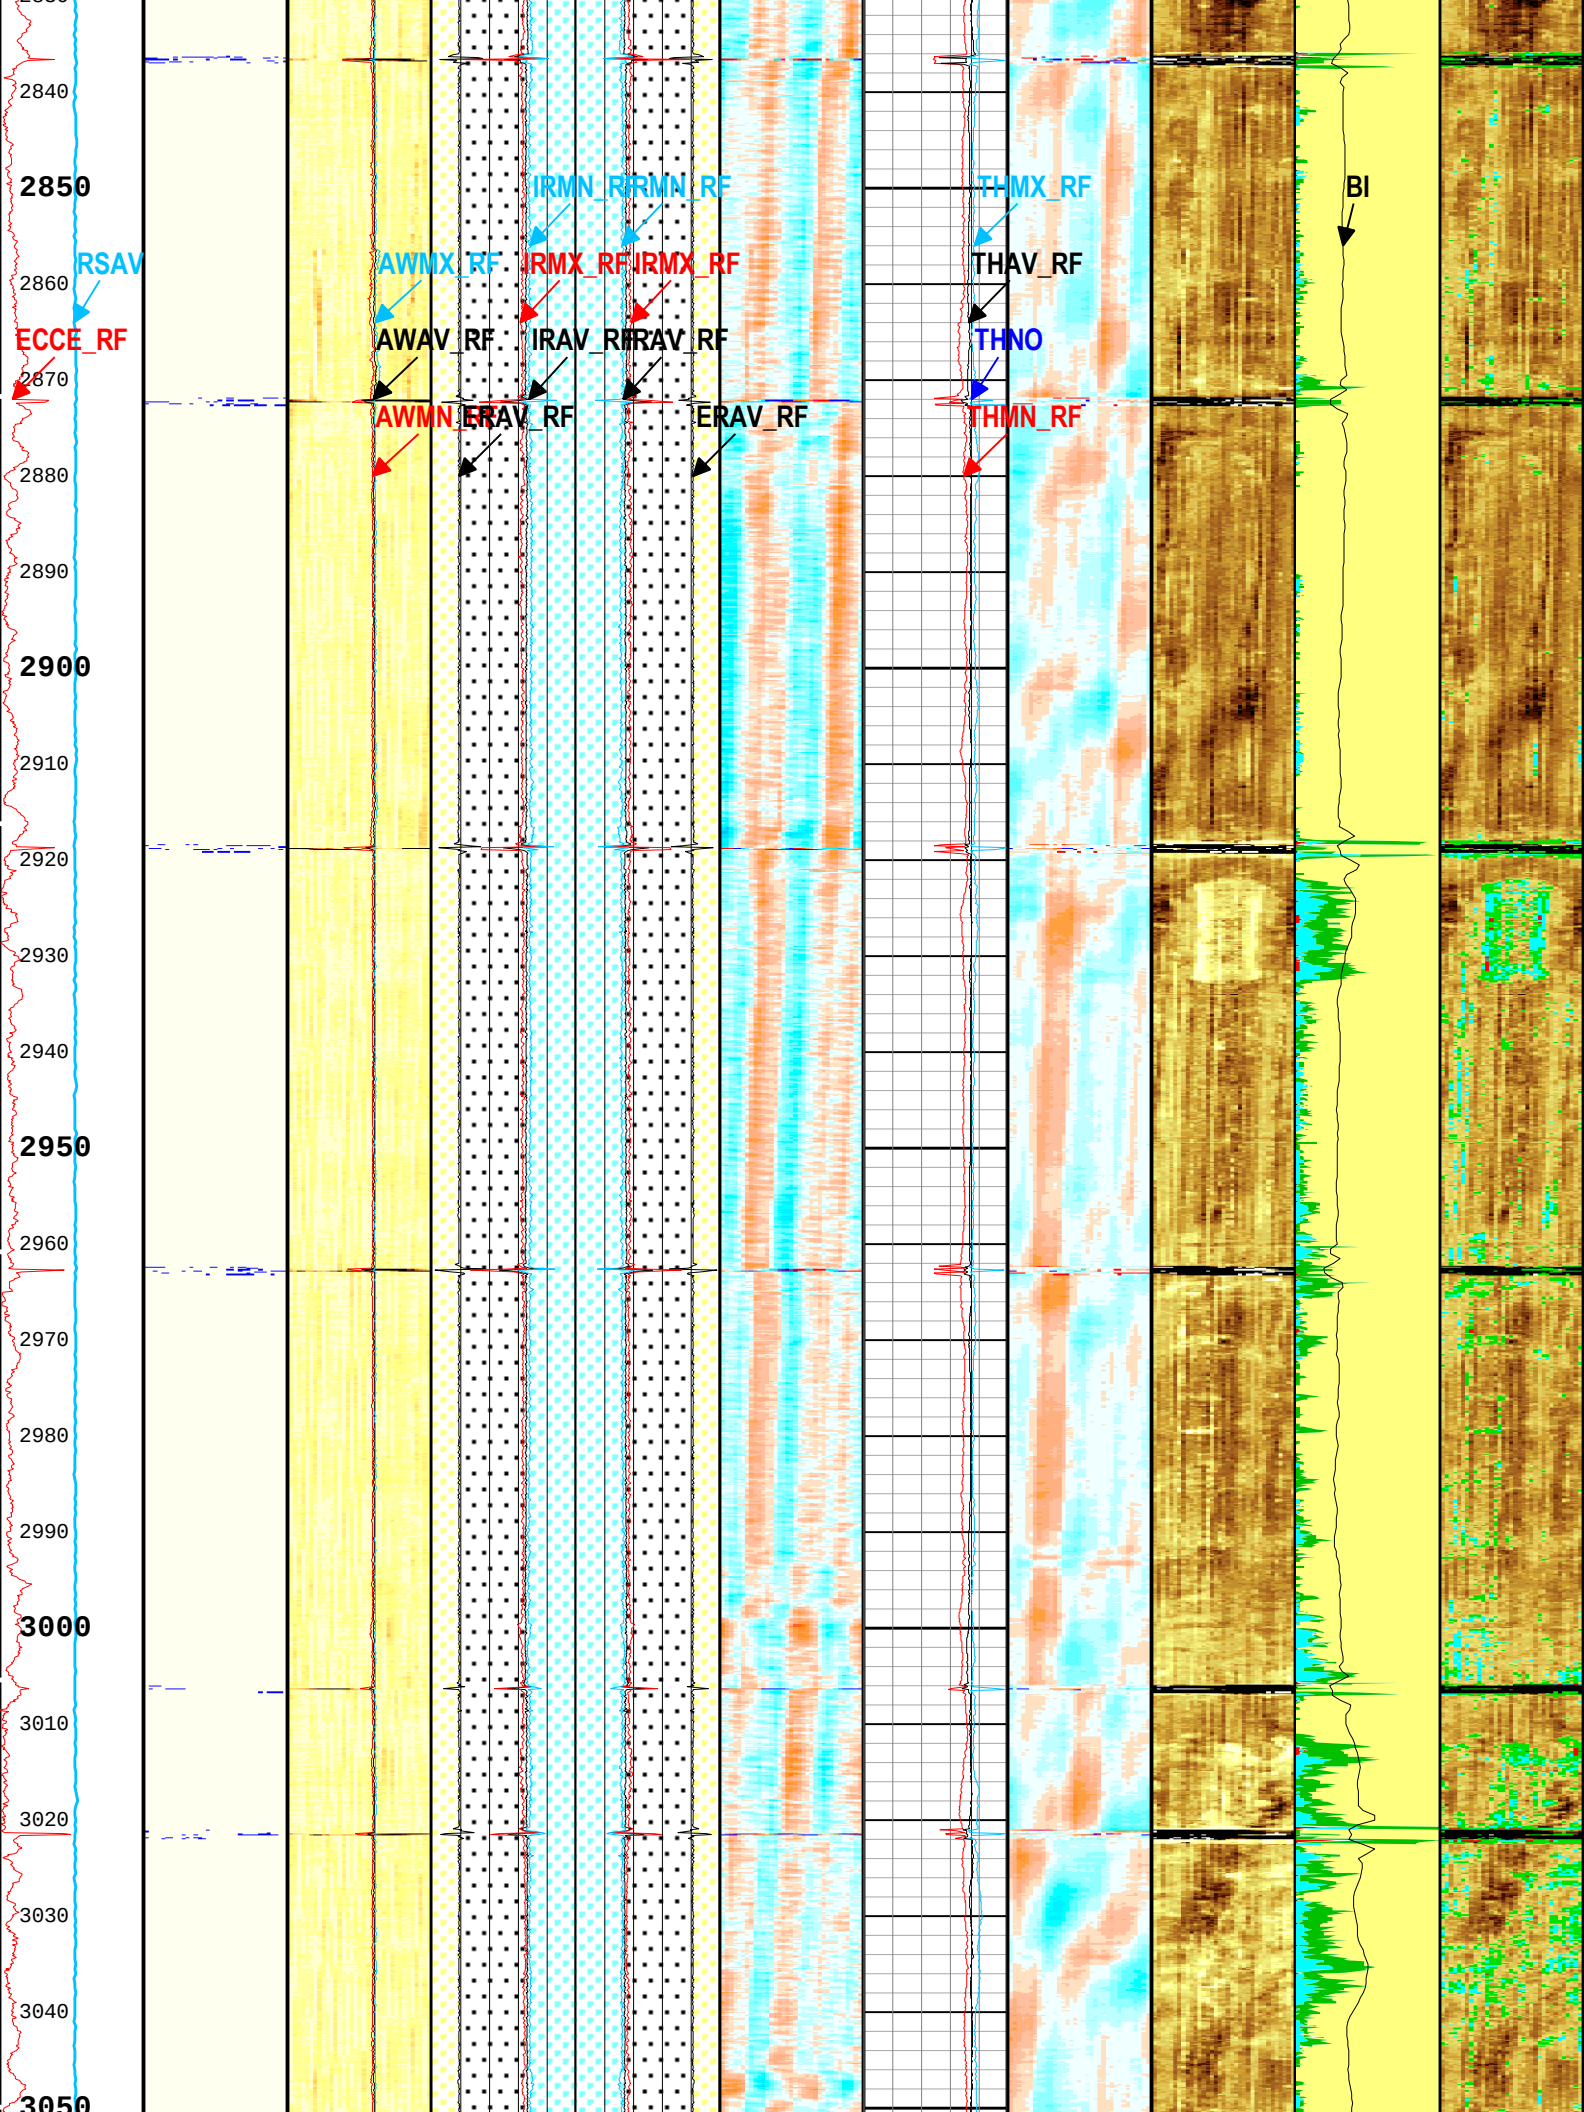
2840
2850
2860
2870
2880
2890
2900
2910
2920
2930
2940
2950
2960
2970
2980
2990
3000
3010
3020
3030
3040
3050
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
BI

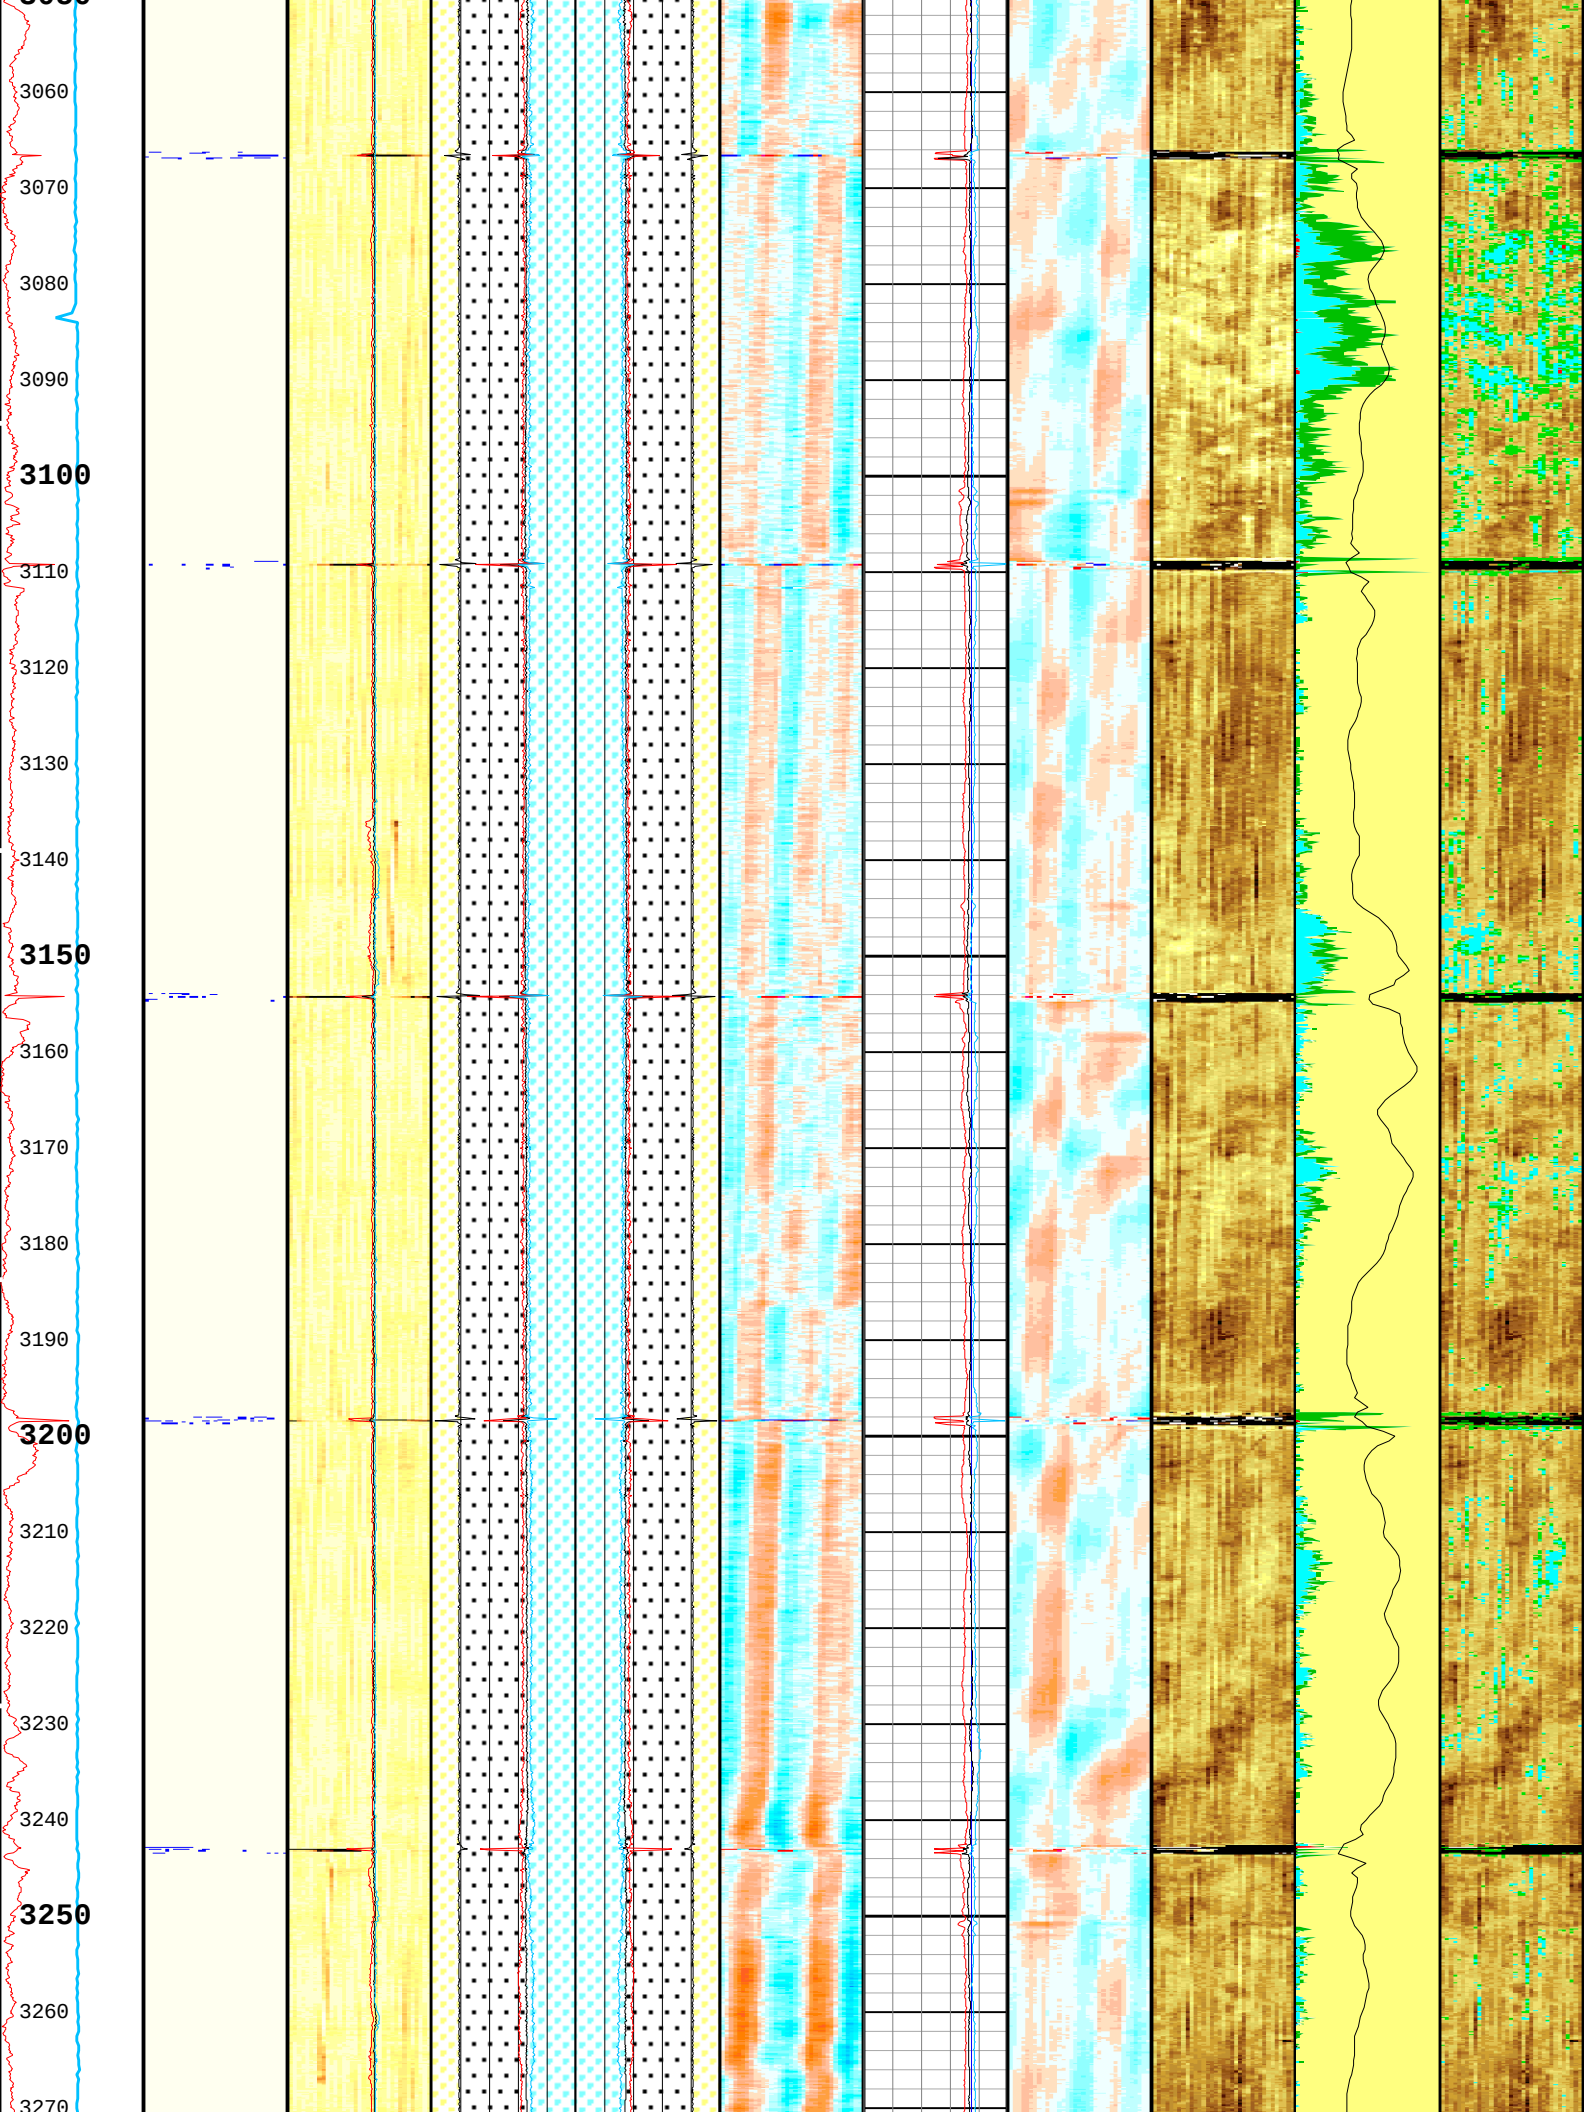
3060
3070
3080
3090
3100
3110
3120
3130
3140
3150
3160
3170
3180
3190
3200
3210
3220
3230
3240
3250
3260
3270

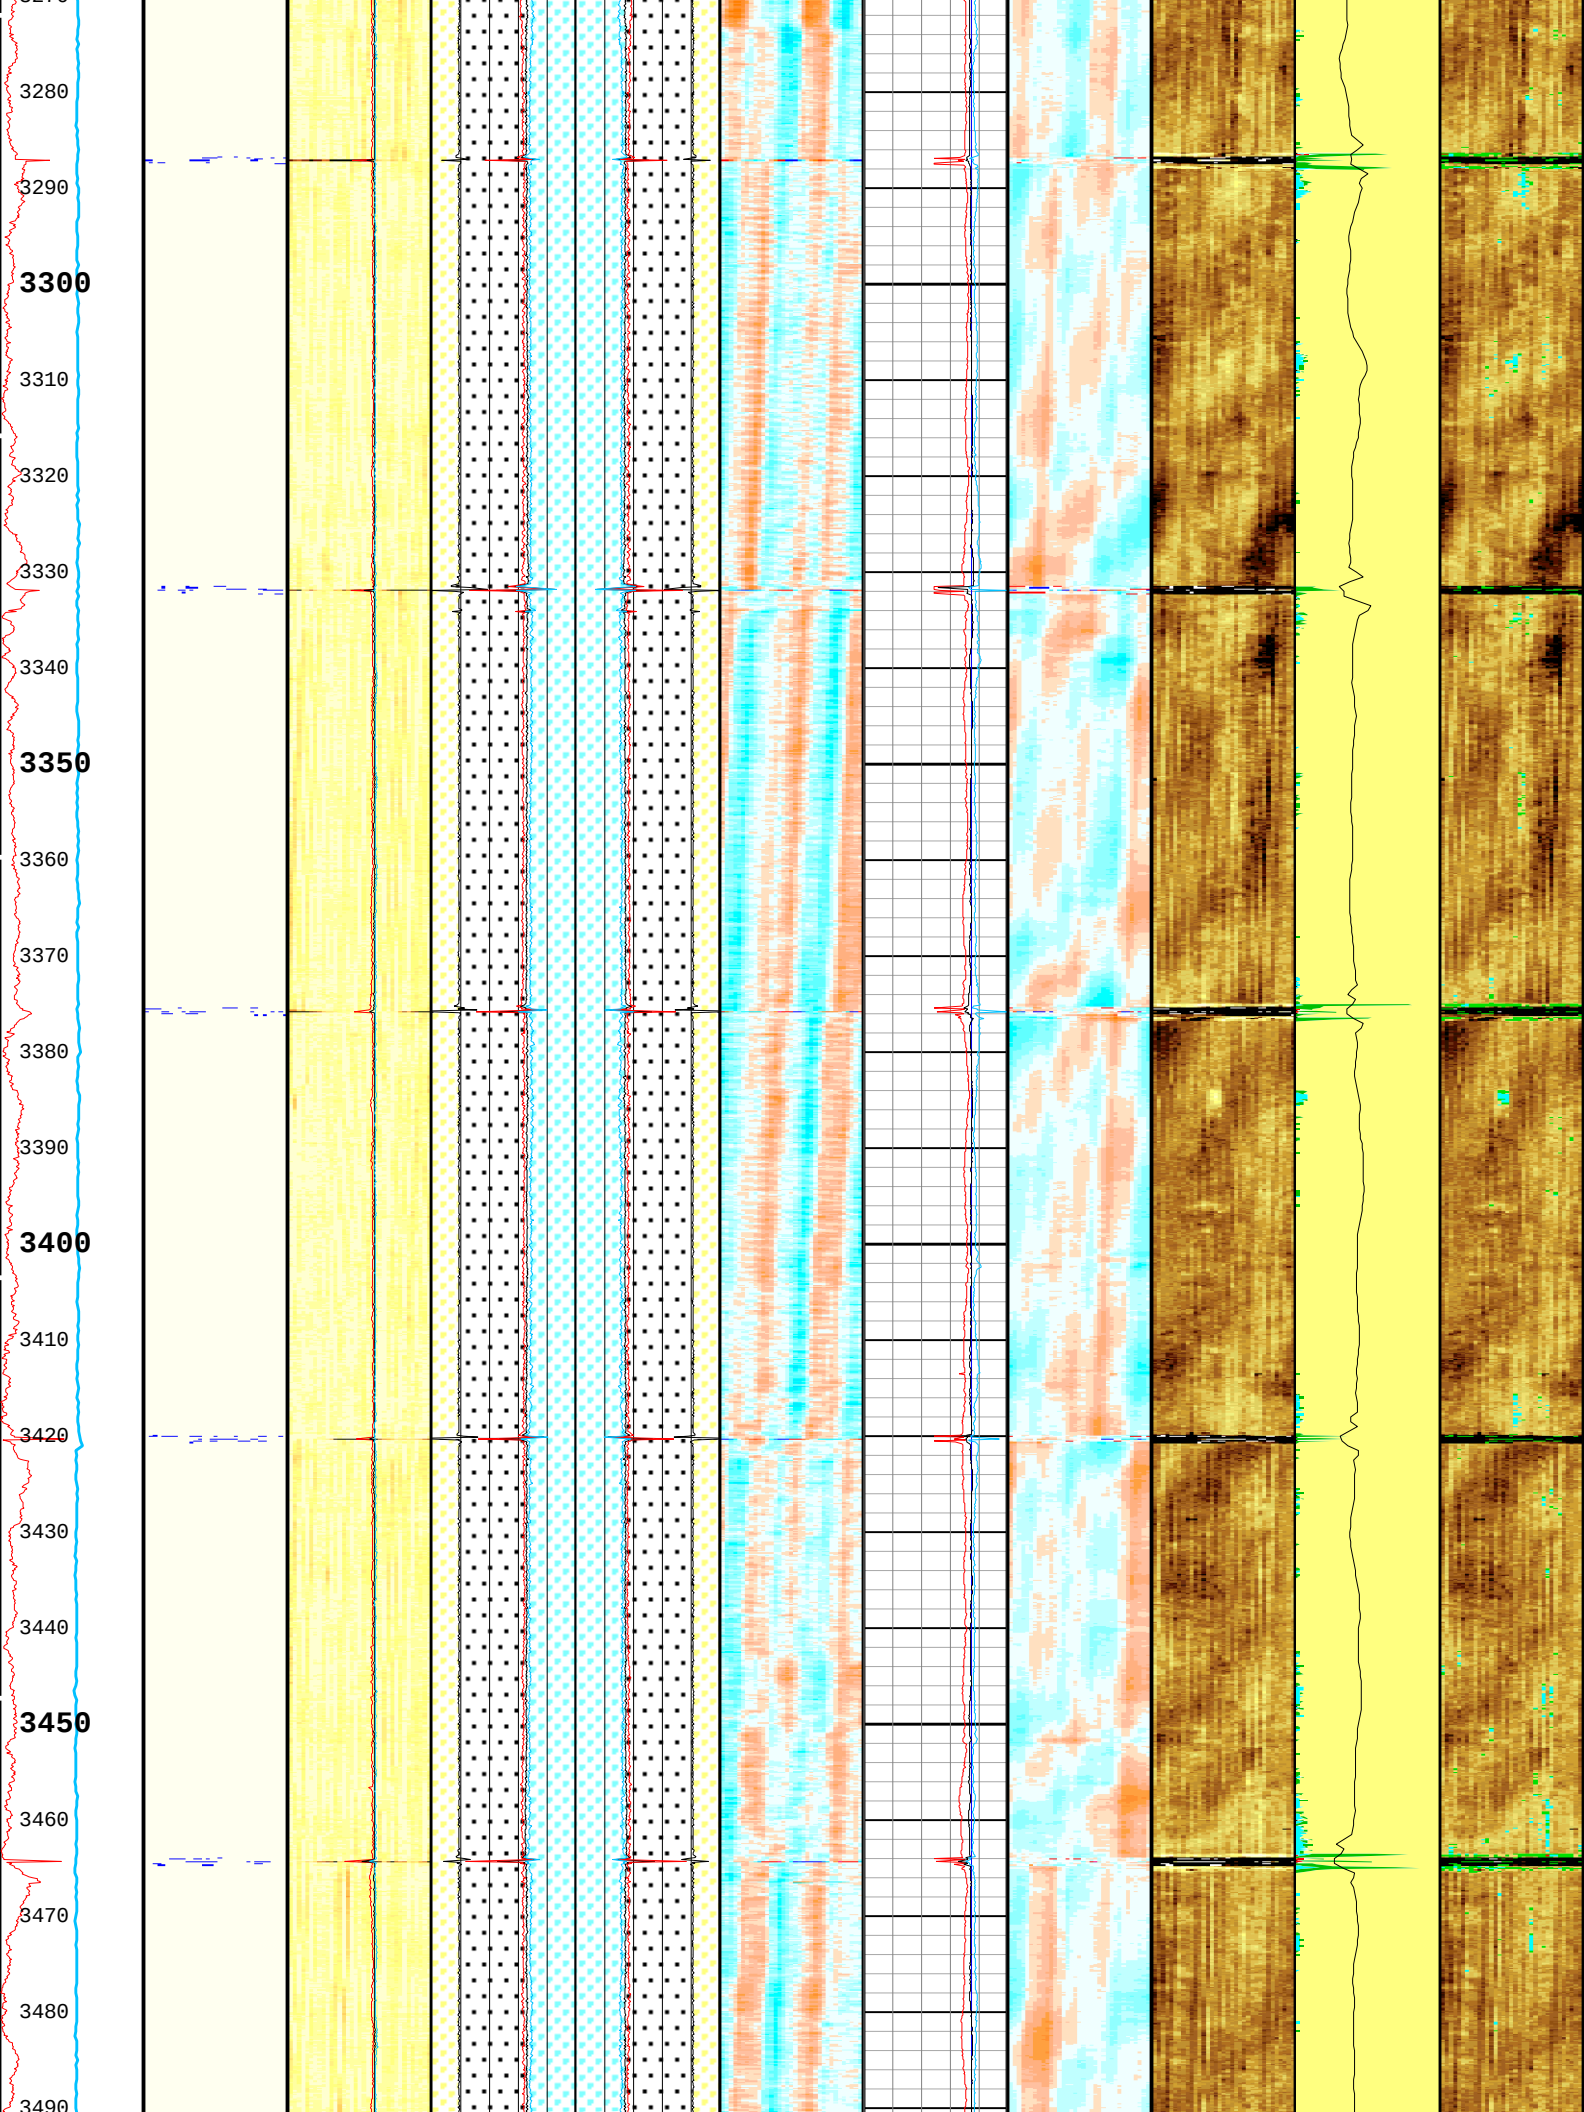
3280
3290
3300
3310
3320
3330
3340
3350
3360
3370
3380
3390
3400
3410
3420
3430
3440
3450
3460
3470
3480
3490

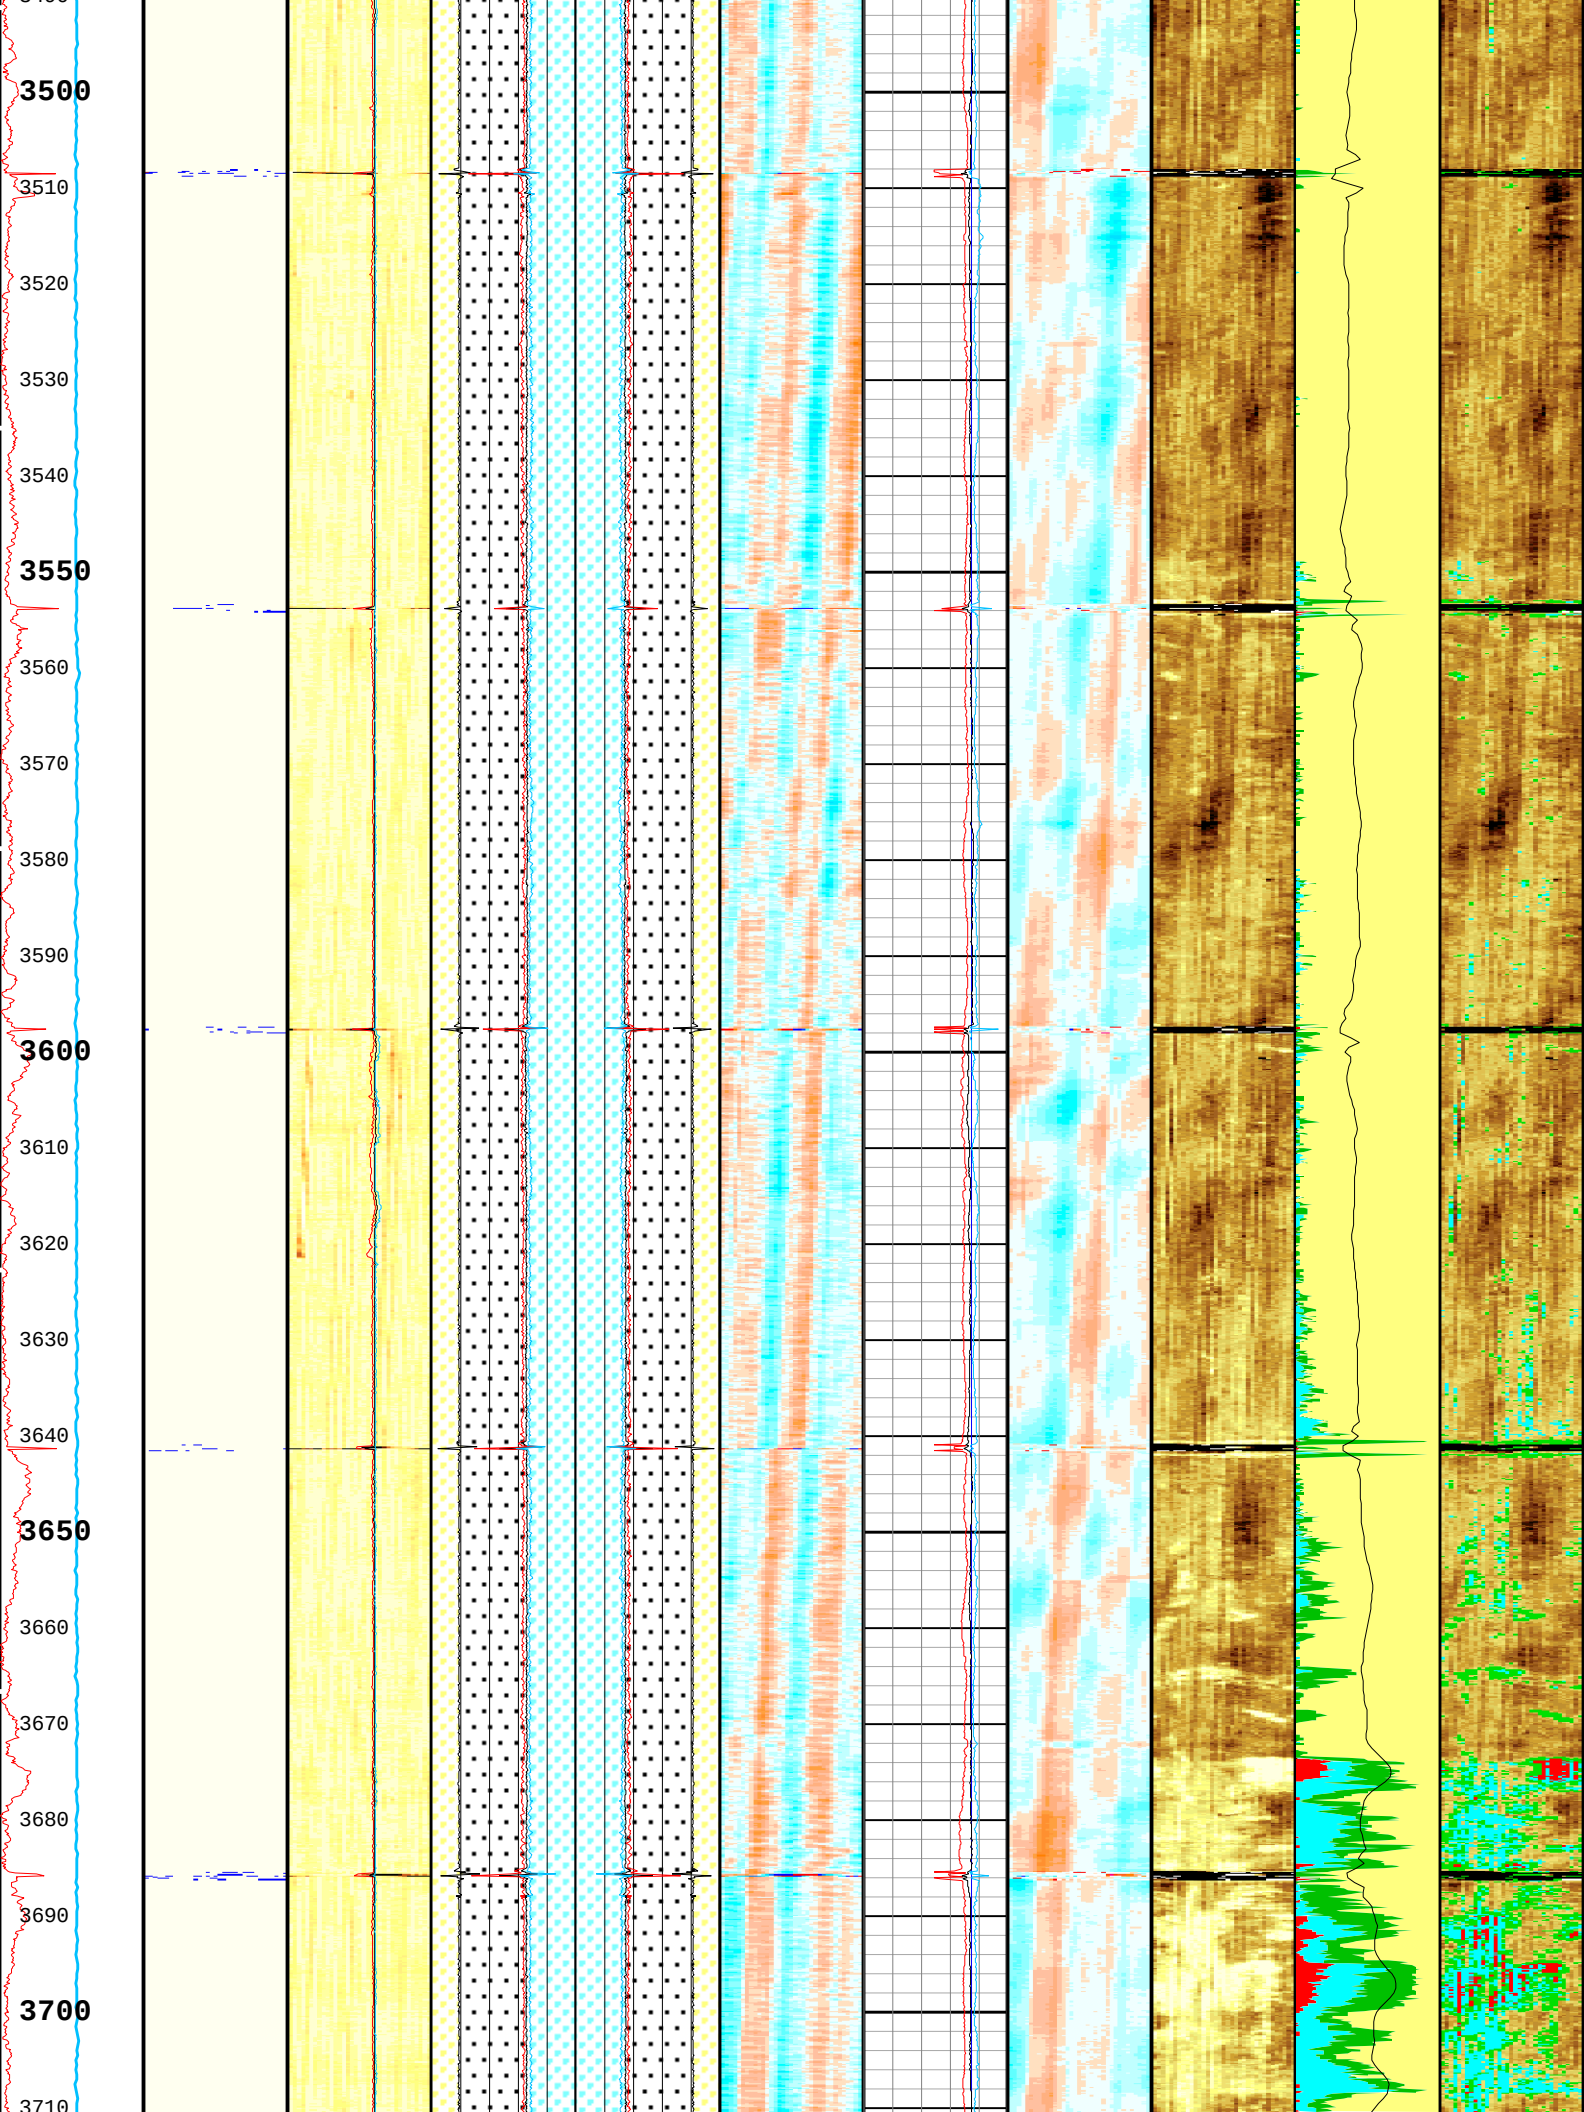
3500
3510
3520
3530
3540
3550
3560
3570
3580
3590
3600
3610
3620
3630
3640
3650
3660
3670
3680
3690
3700
3710

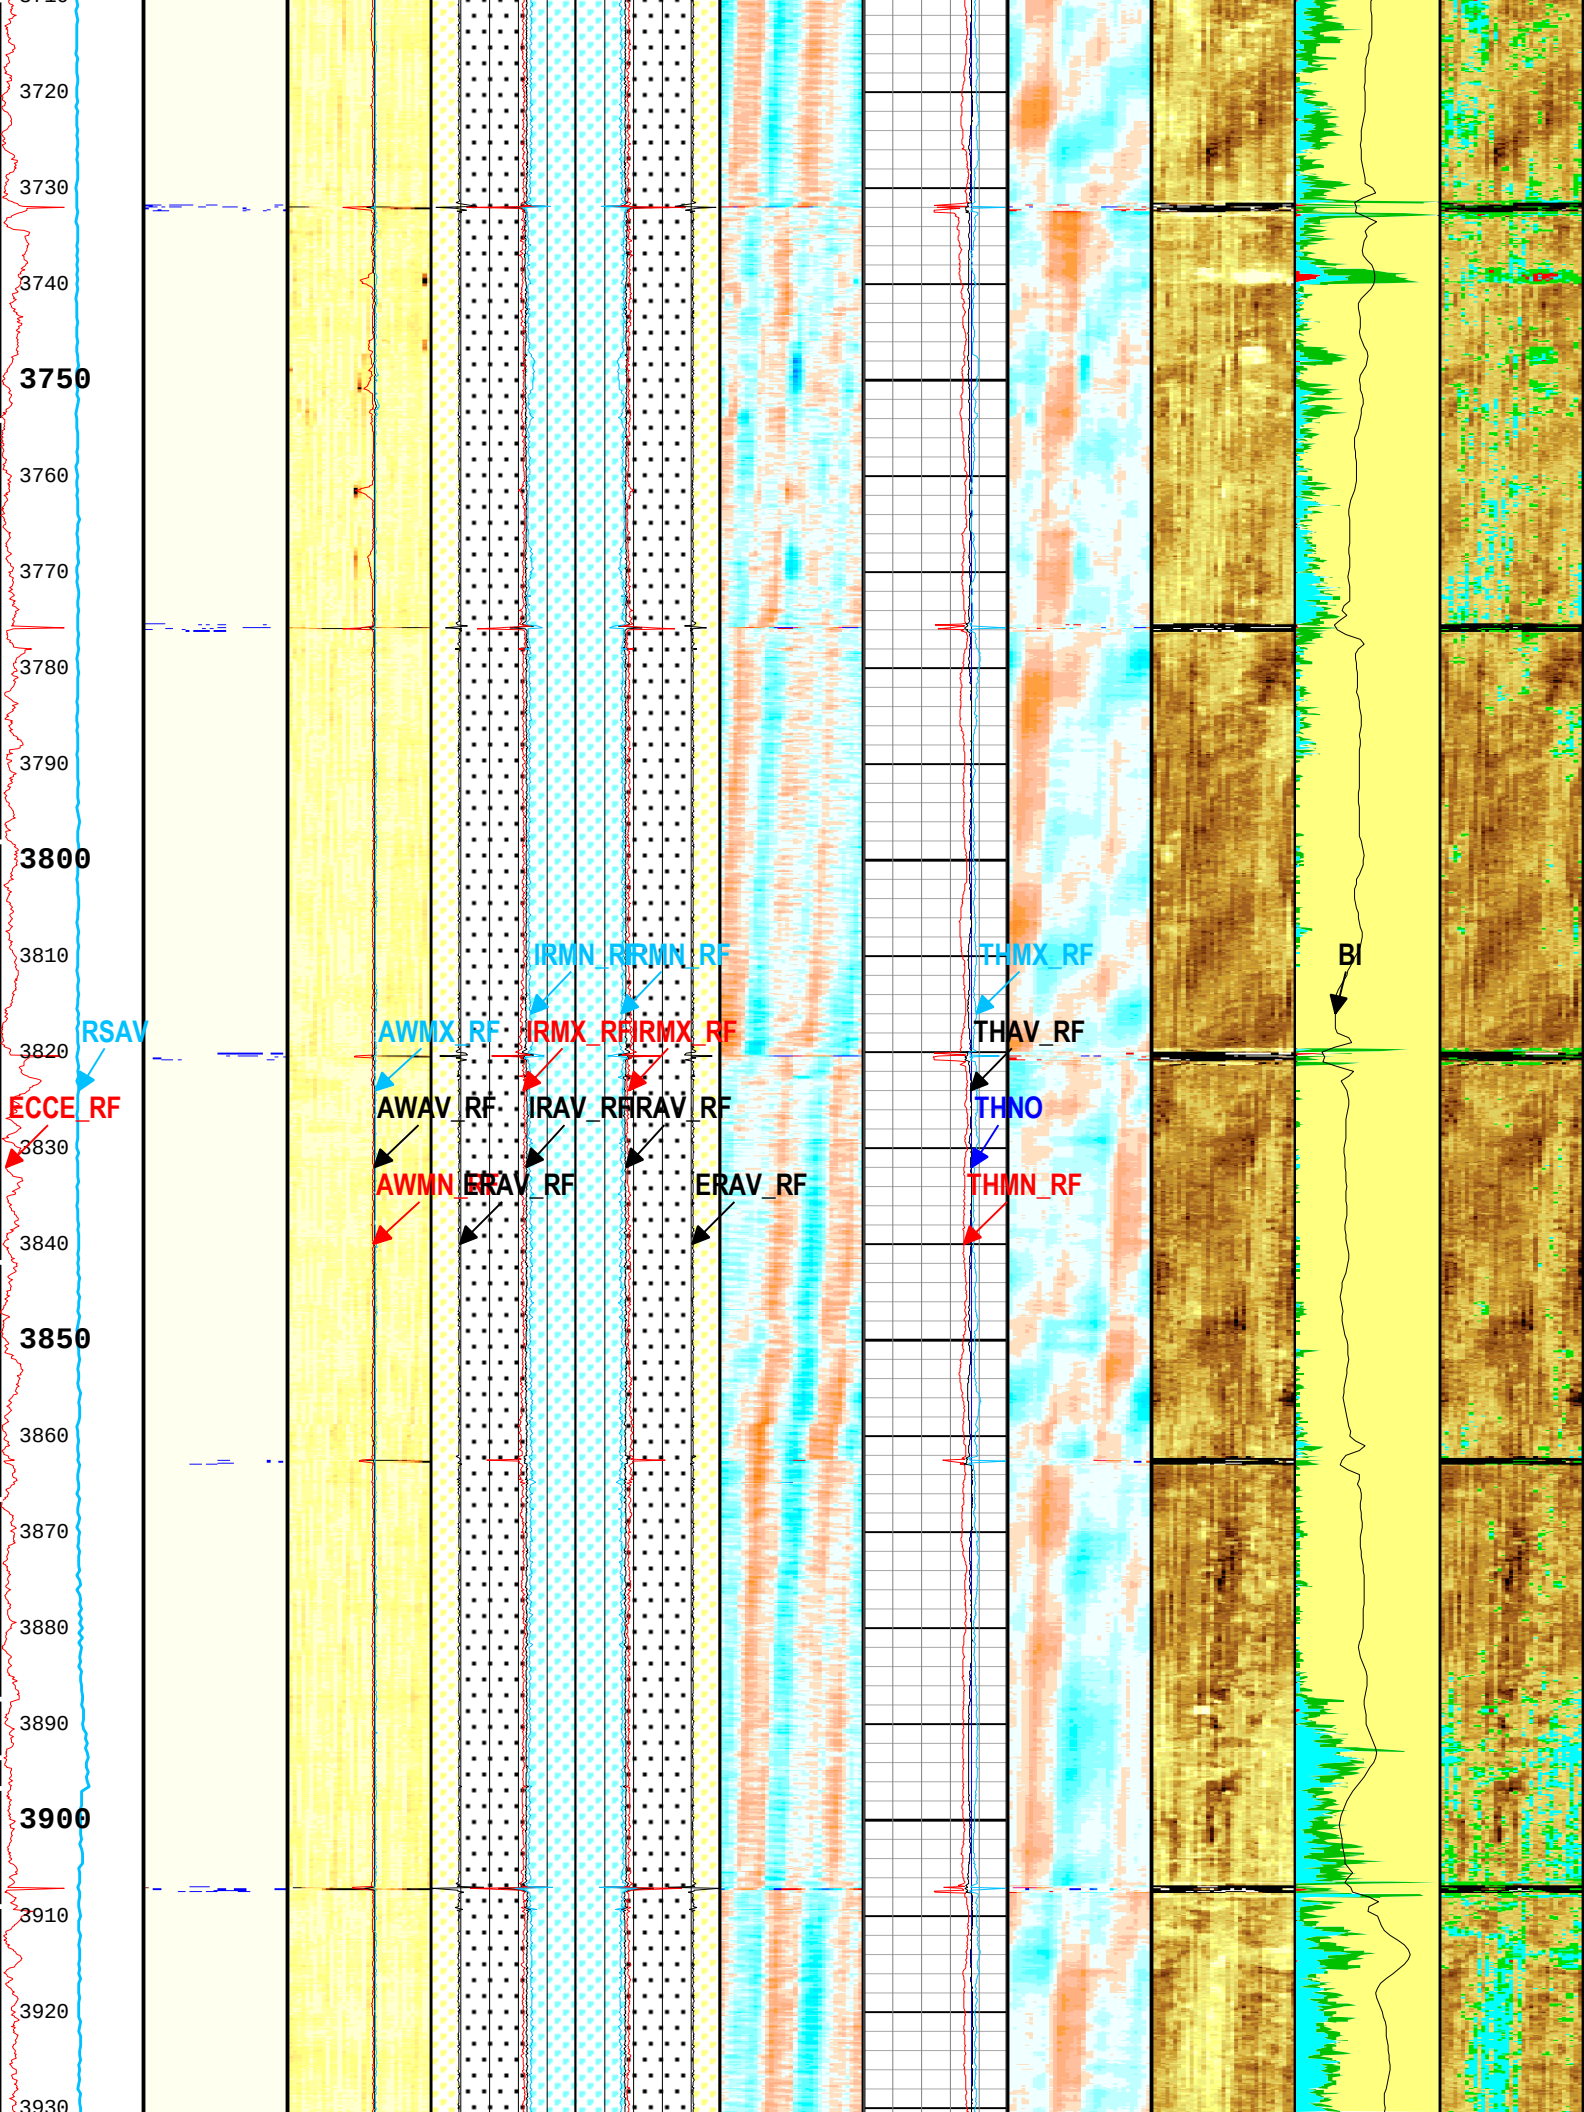
3720
3730
3740
3750
3760
3770
3780
3790
3800
3810
3820
3830
3840
3850
3860
3870
3880
3890
3900
3910
3920
3930
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
BI

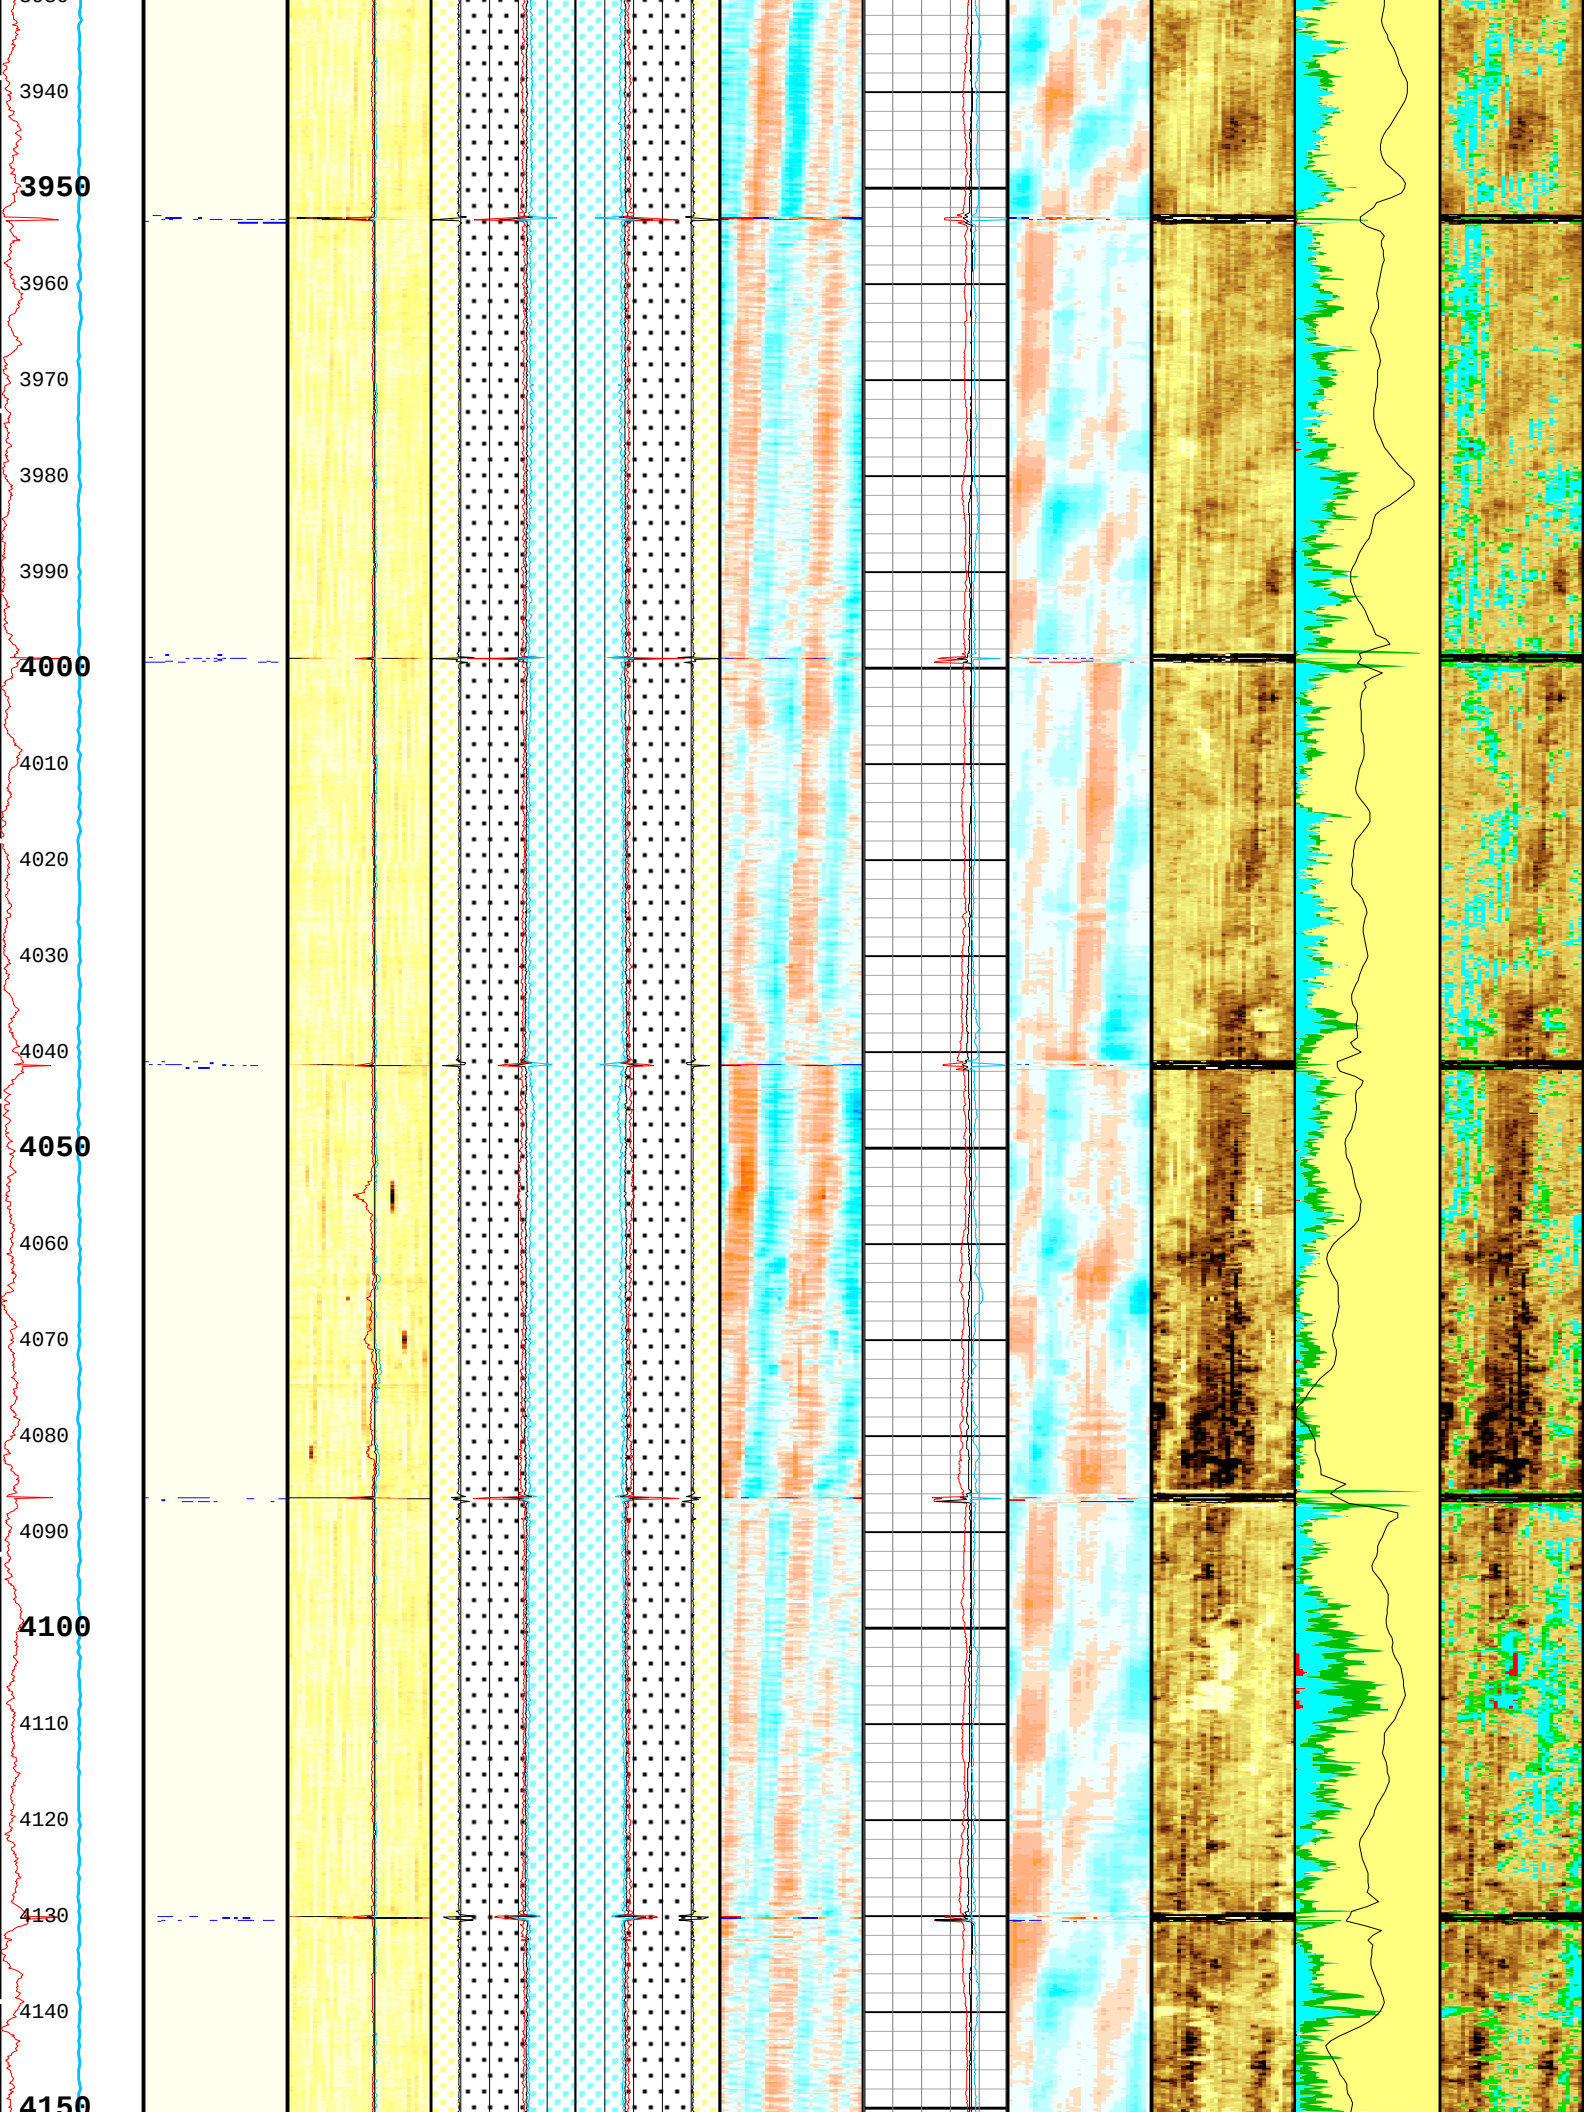
3940
3950
3960
3970
3980
3990
4000
4010
4020
4030
4040
4050
4060
4070
4080
4090
4100
4110
4120
4130
4140
4150

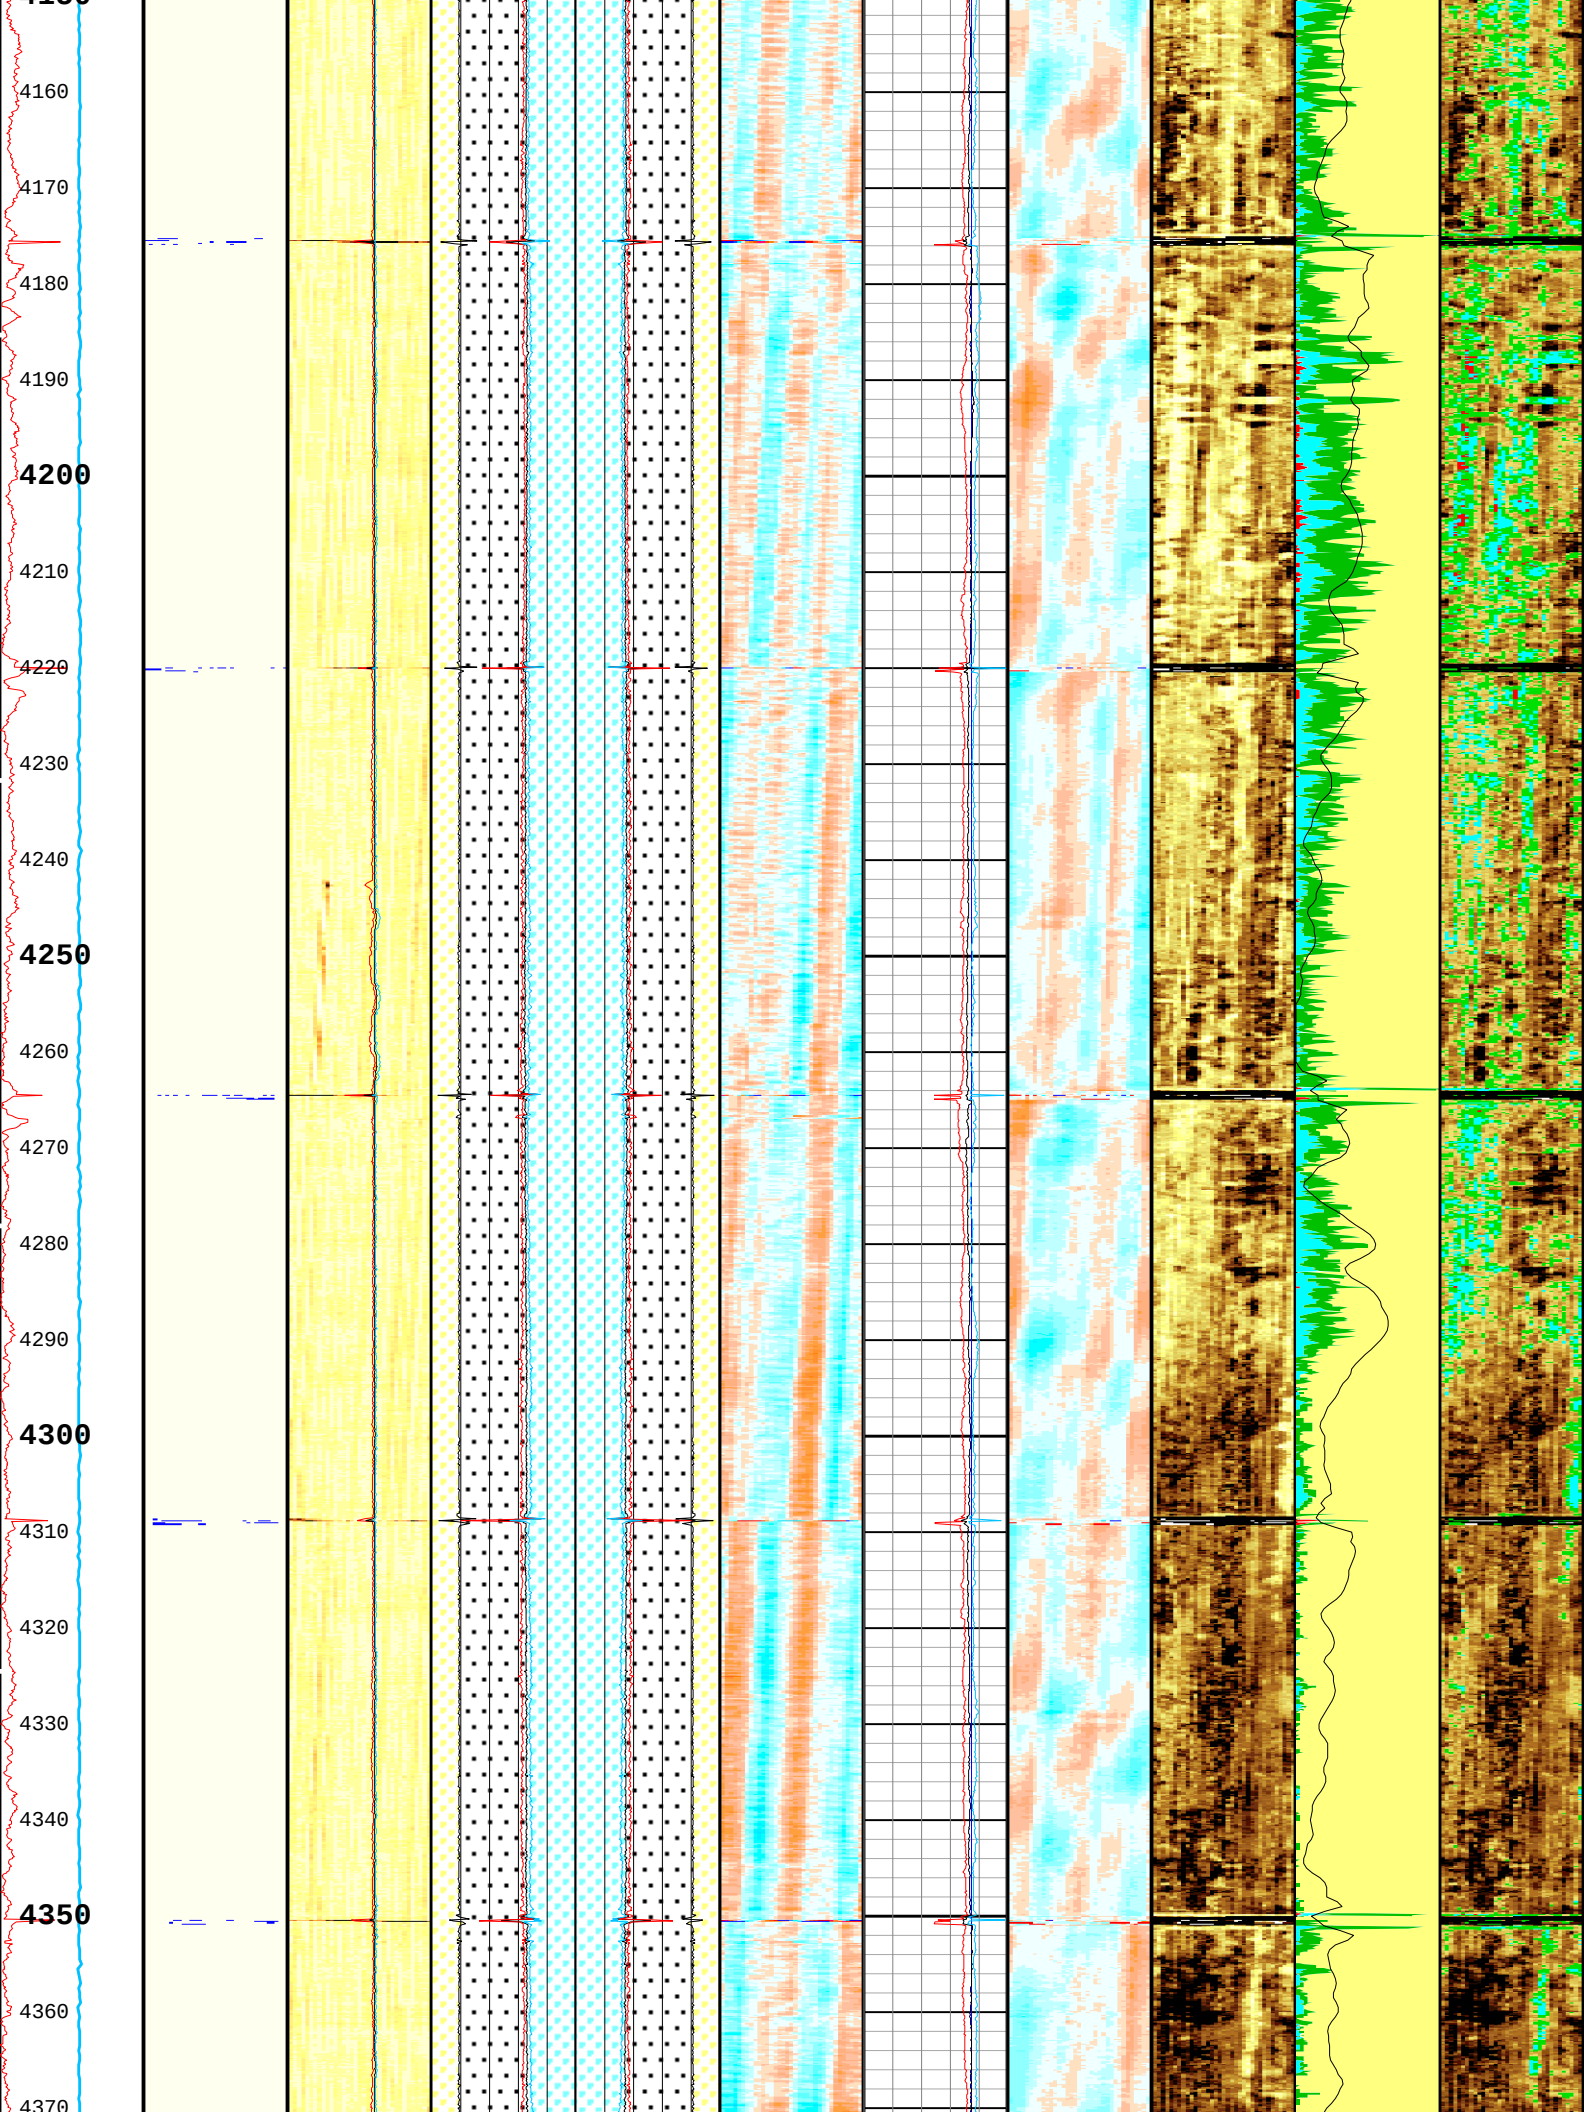
4160
4170
4180
4190
4200
4210
4220
4230
4240
4250
4260
4270
4280
4290
4300
4310
4320
4330
4340
4350
4360
4370

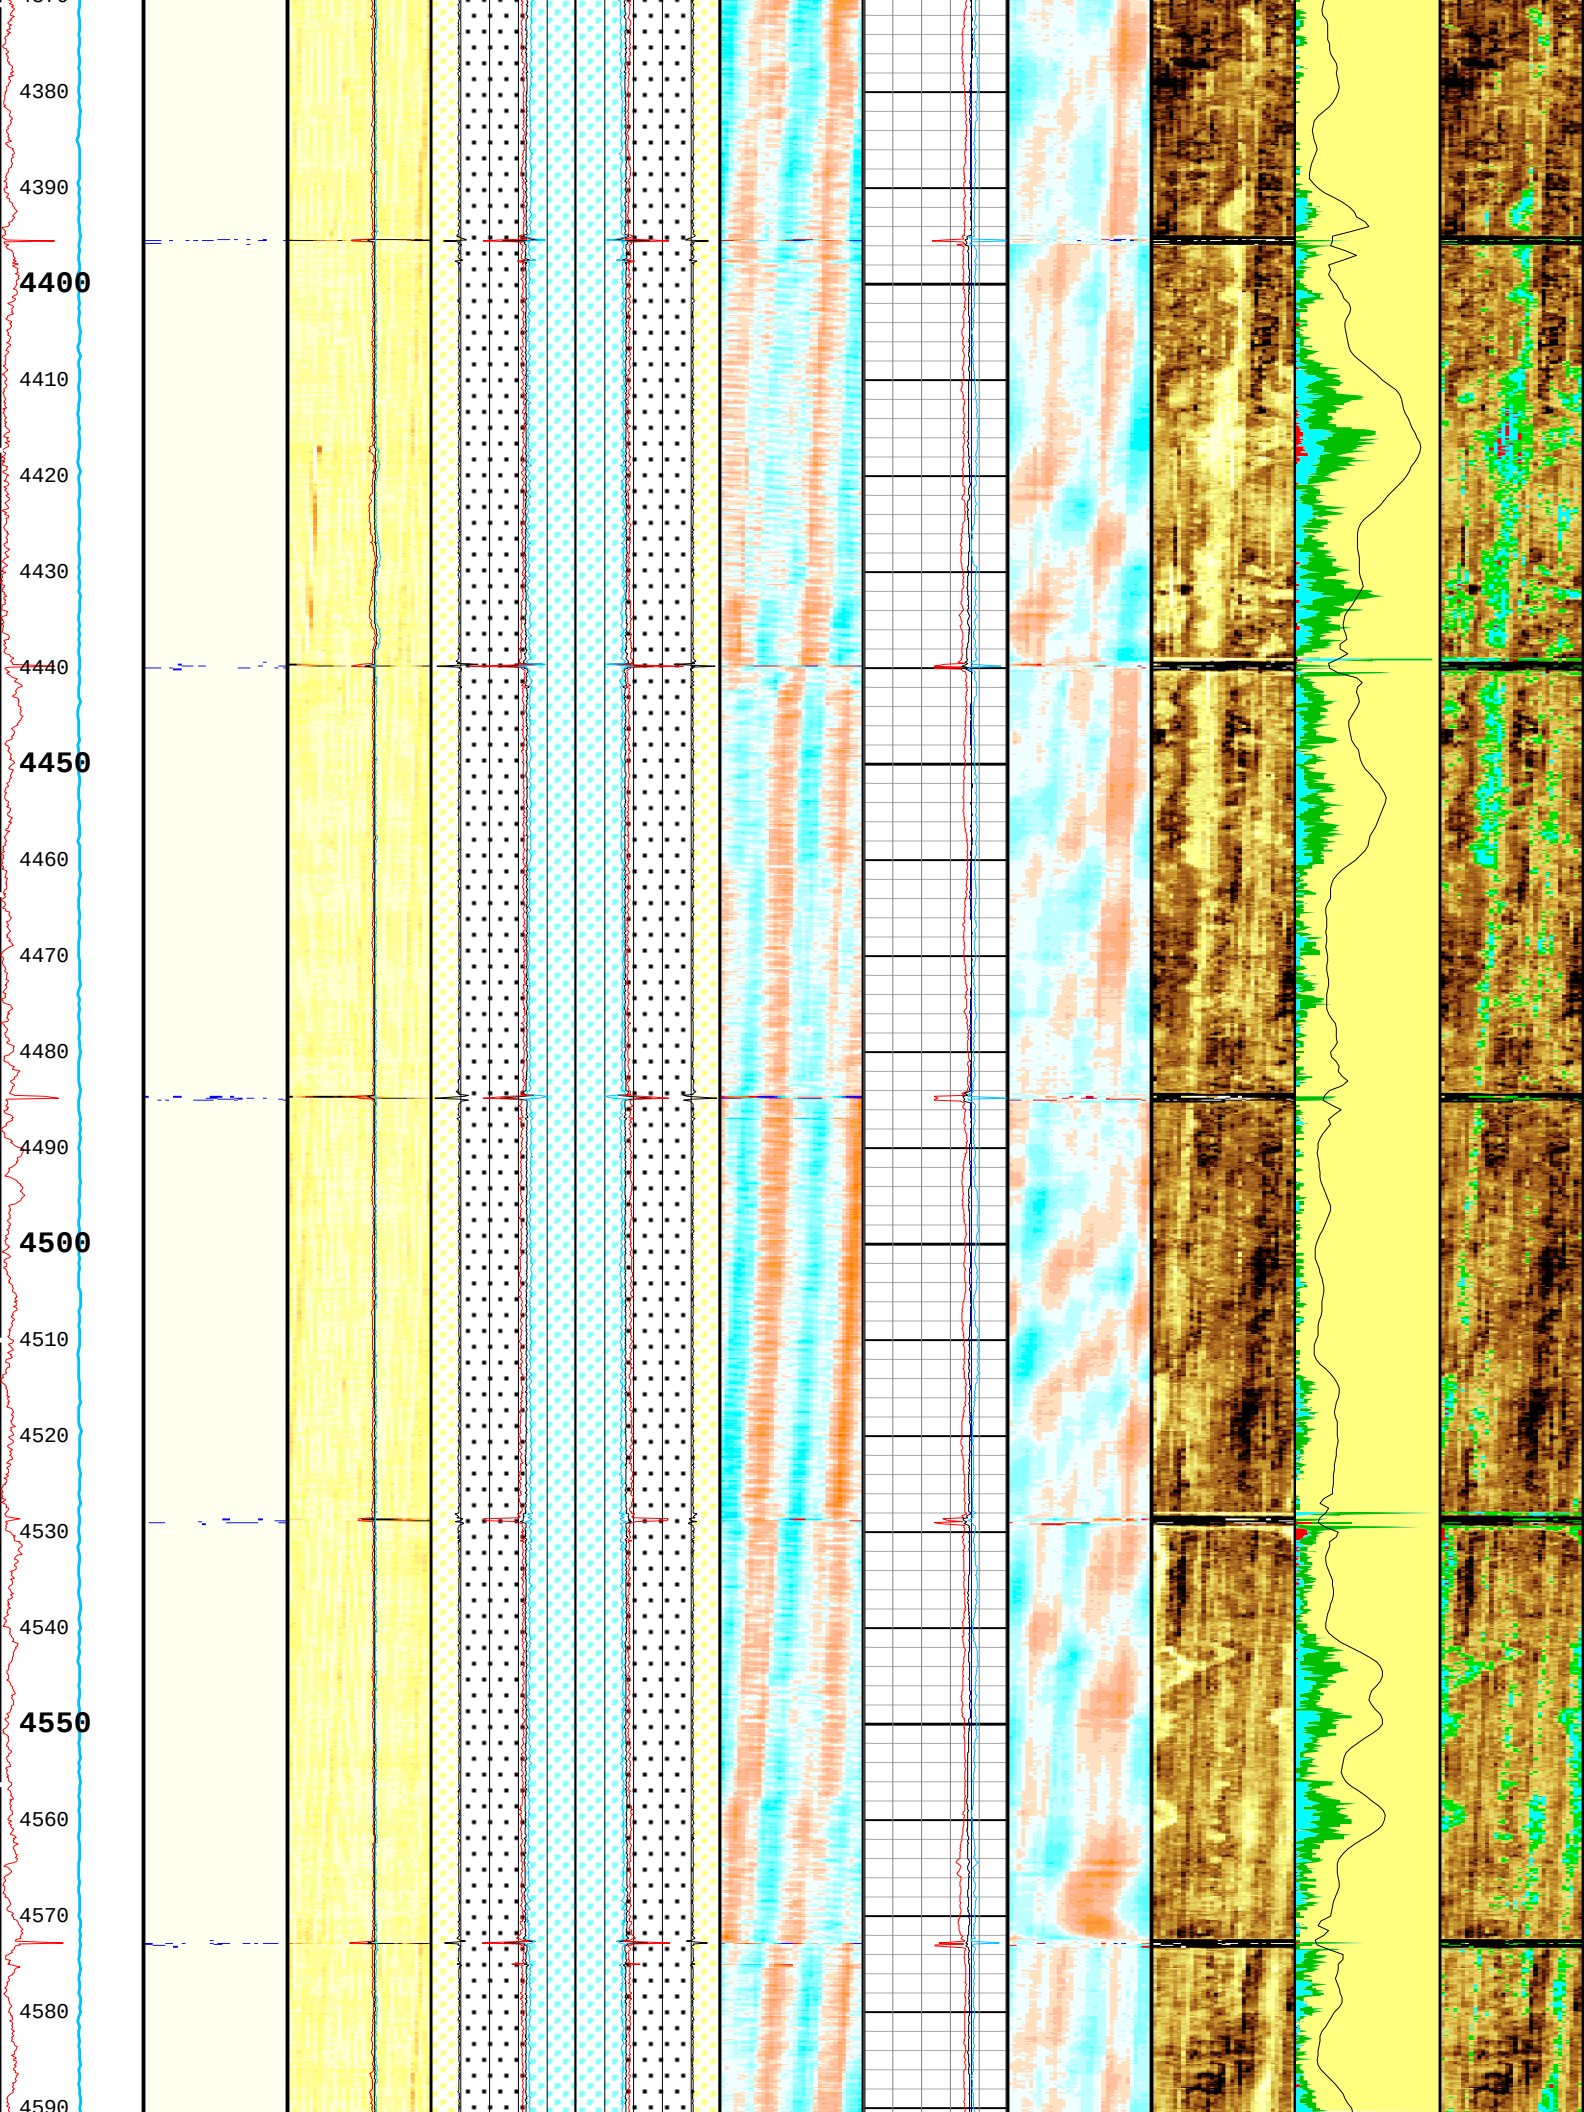
4380
4390
4400
4410
4420
4430
4440
4450
4460
4470
4480
4490
4500
4510
4520
4530
4540
4550
4560
4570
4580
4590

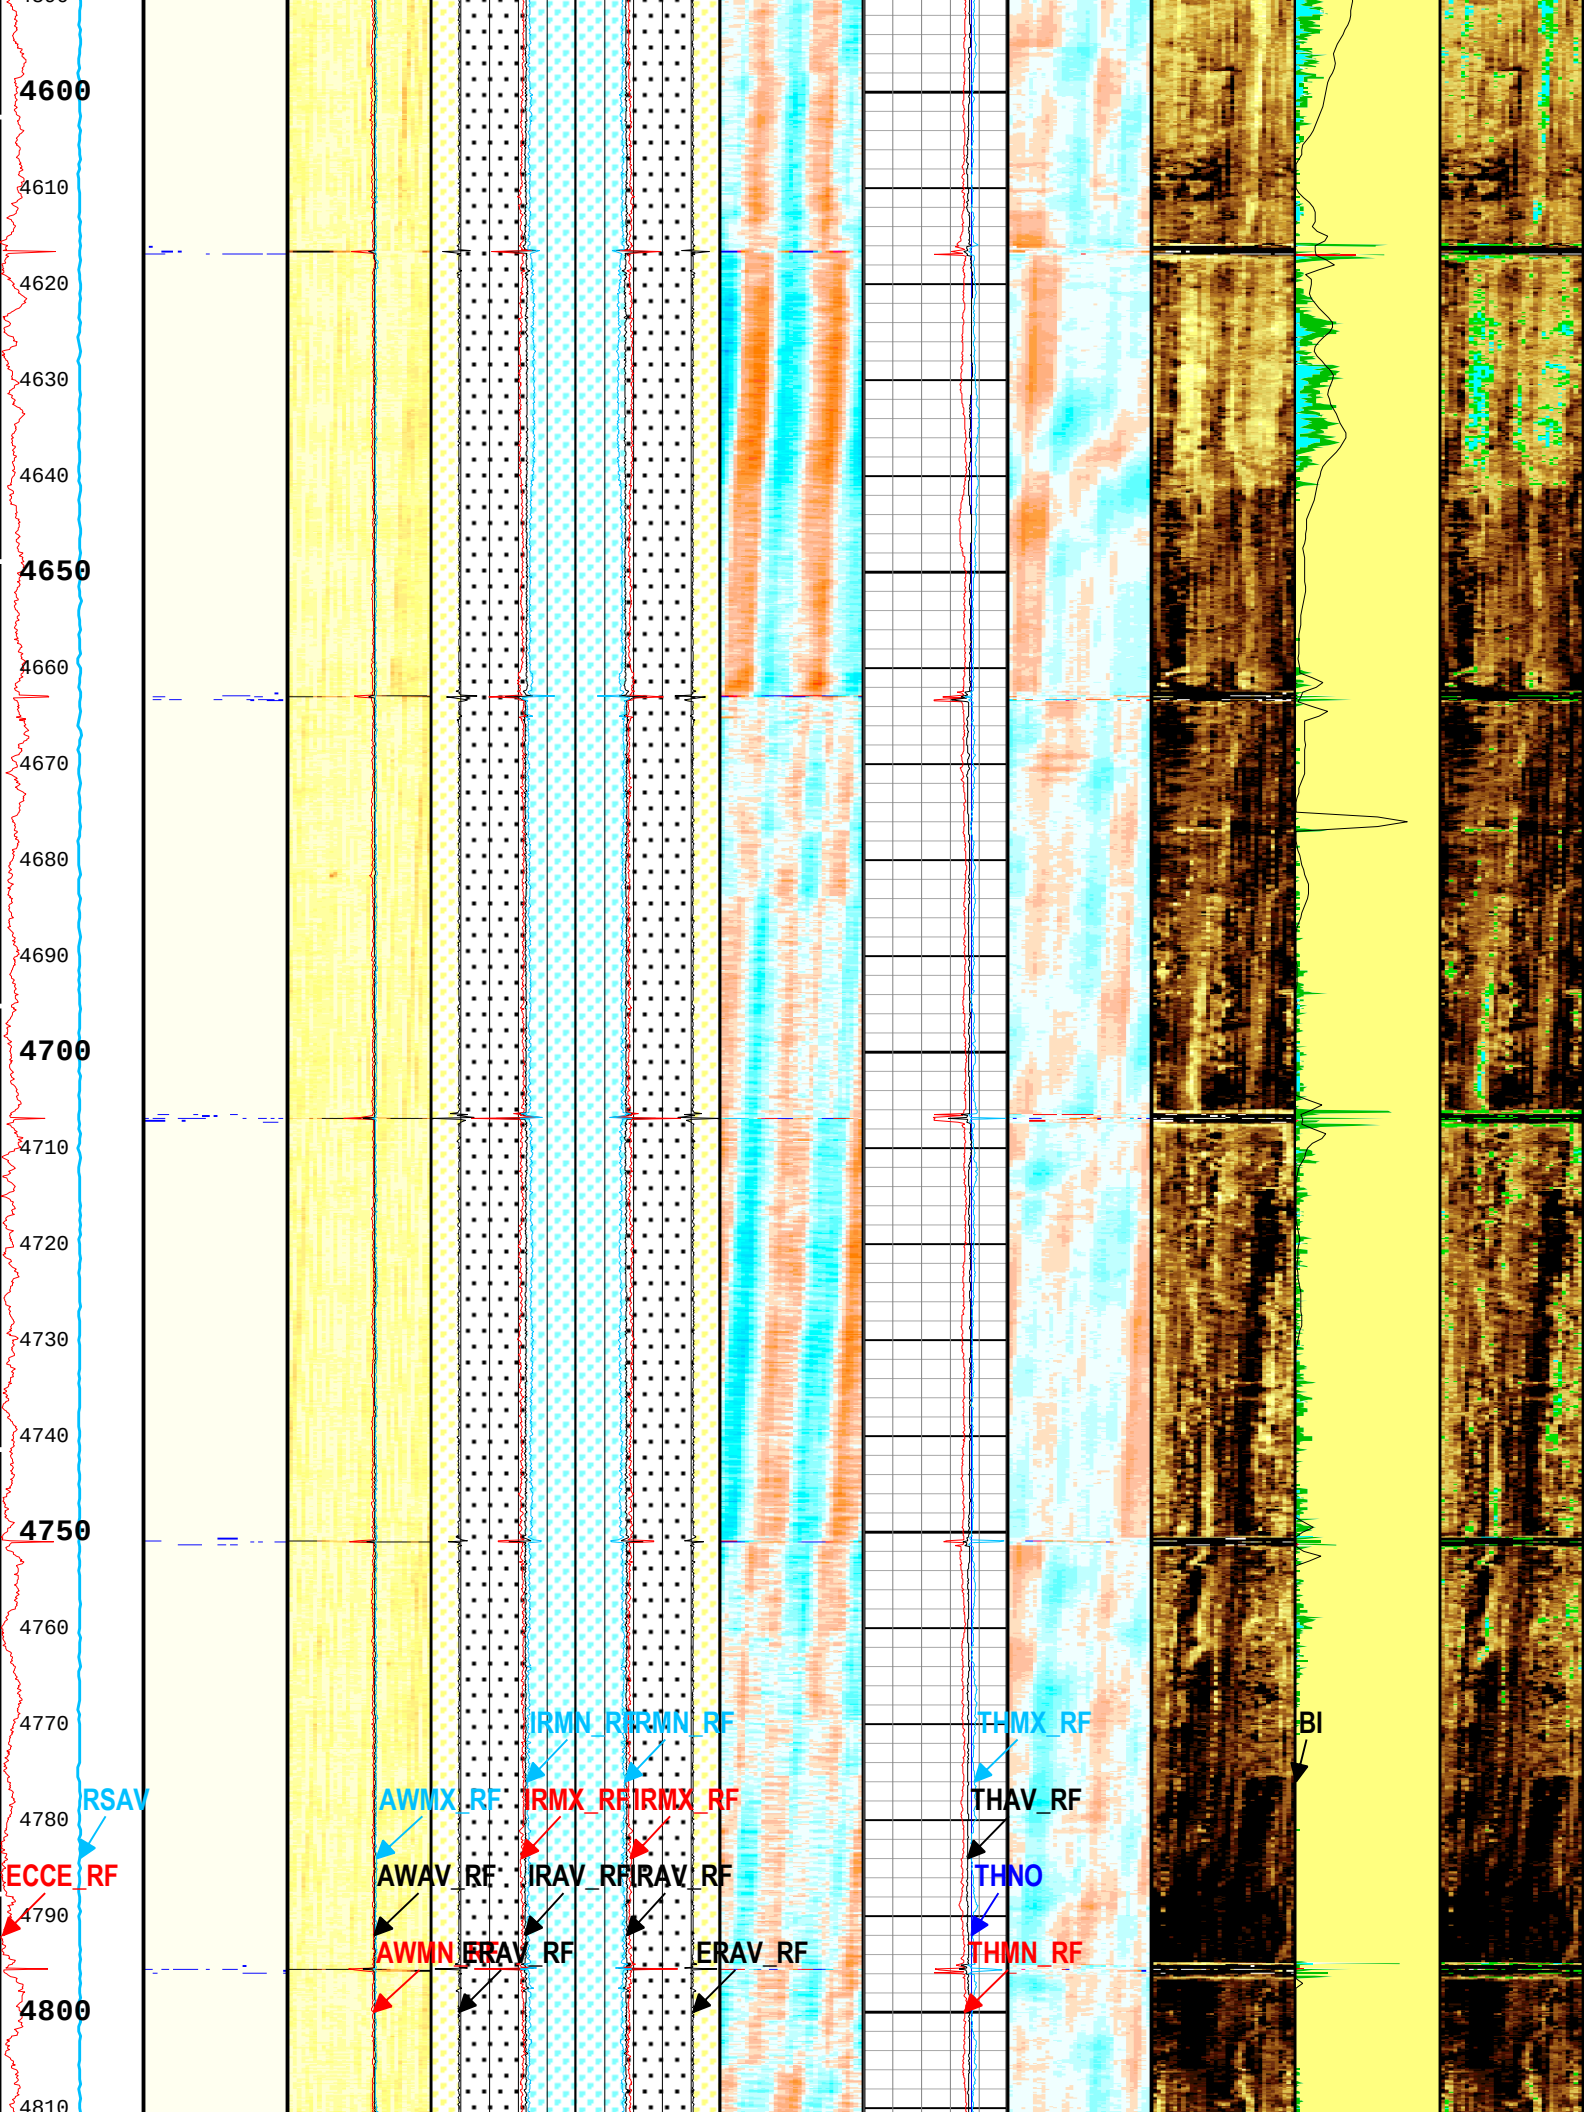
4600
4610
4620
4630
4640
4650
4660
4670
4680
4690
4700
4710
4720
4730
4740
4750
4760
4770
4780
4790
4800
4810
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
BI

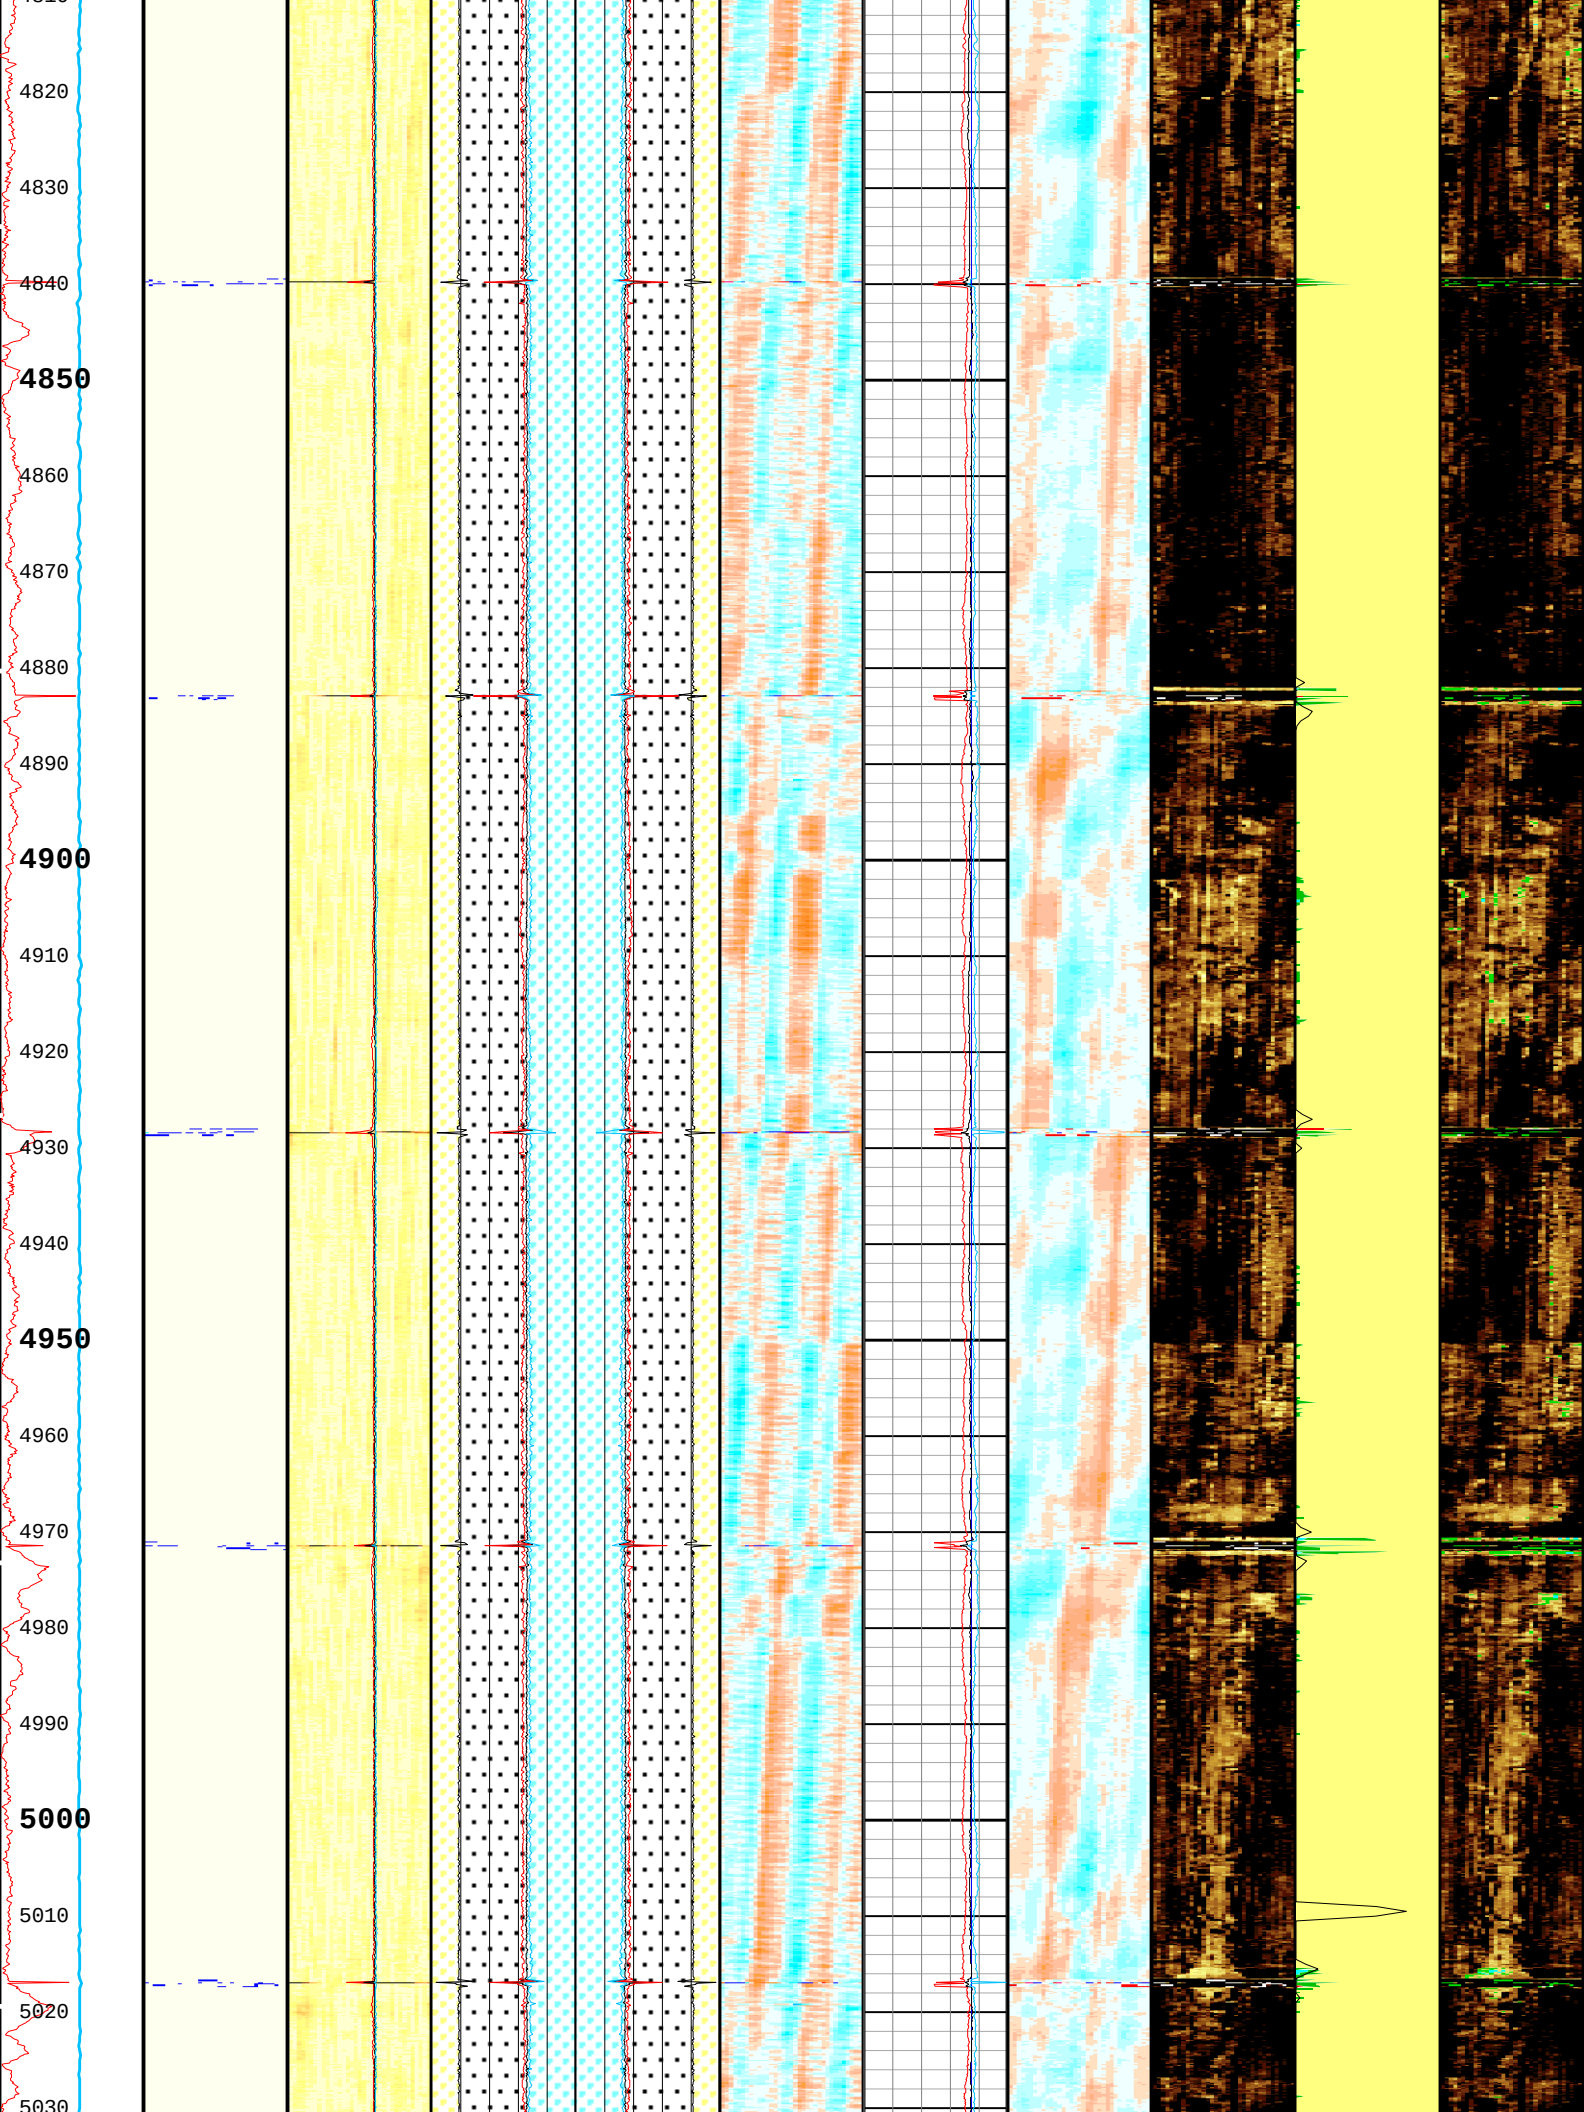
4820
4830
4840
4850
4860
4870
4880
4890
4900
4910
4920
4930
4940
4950
4960
4970
4980
4990
5000
5010
5020
5030

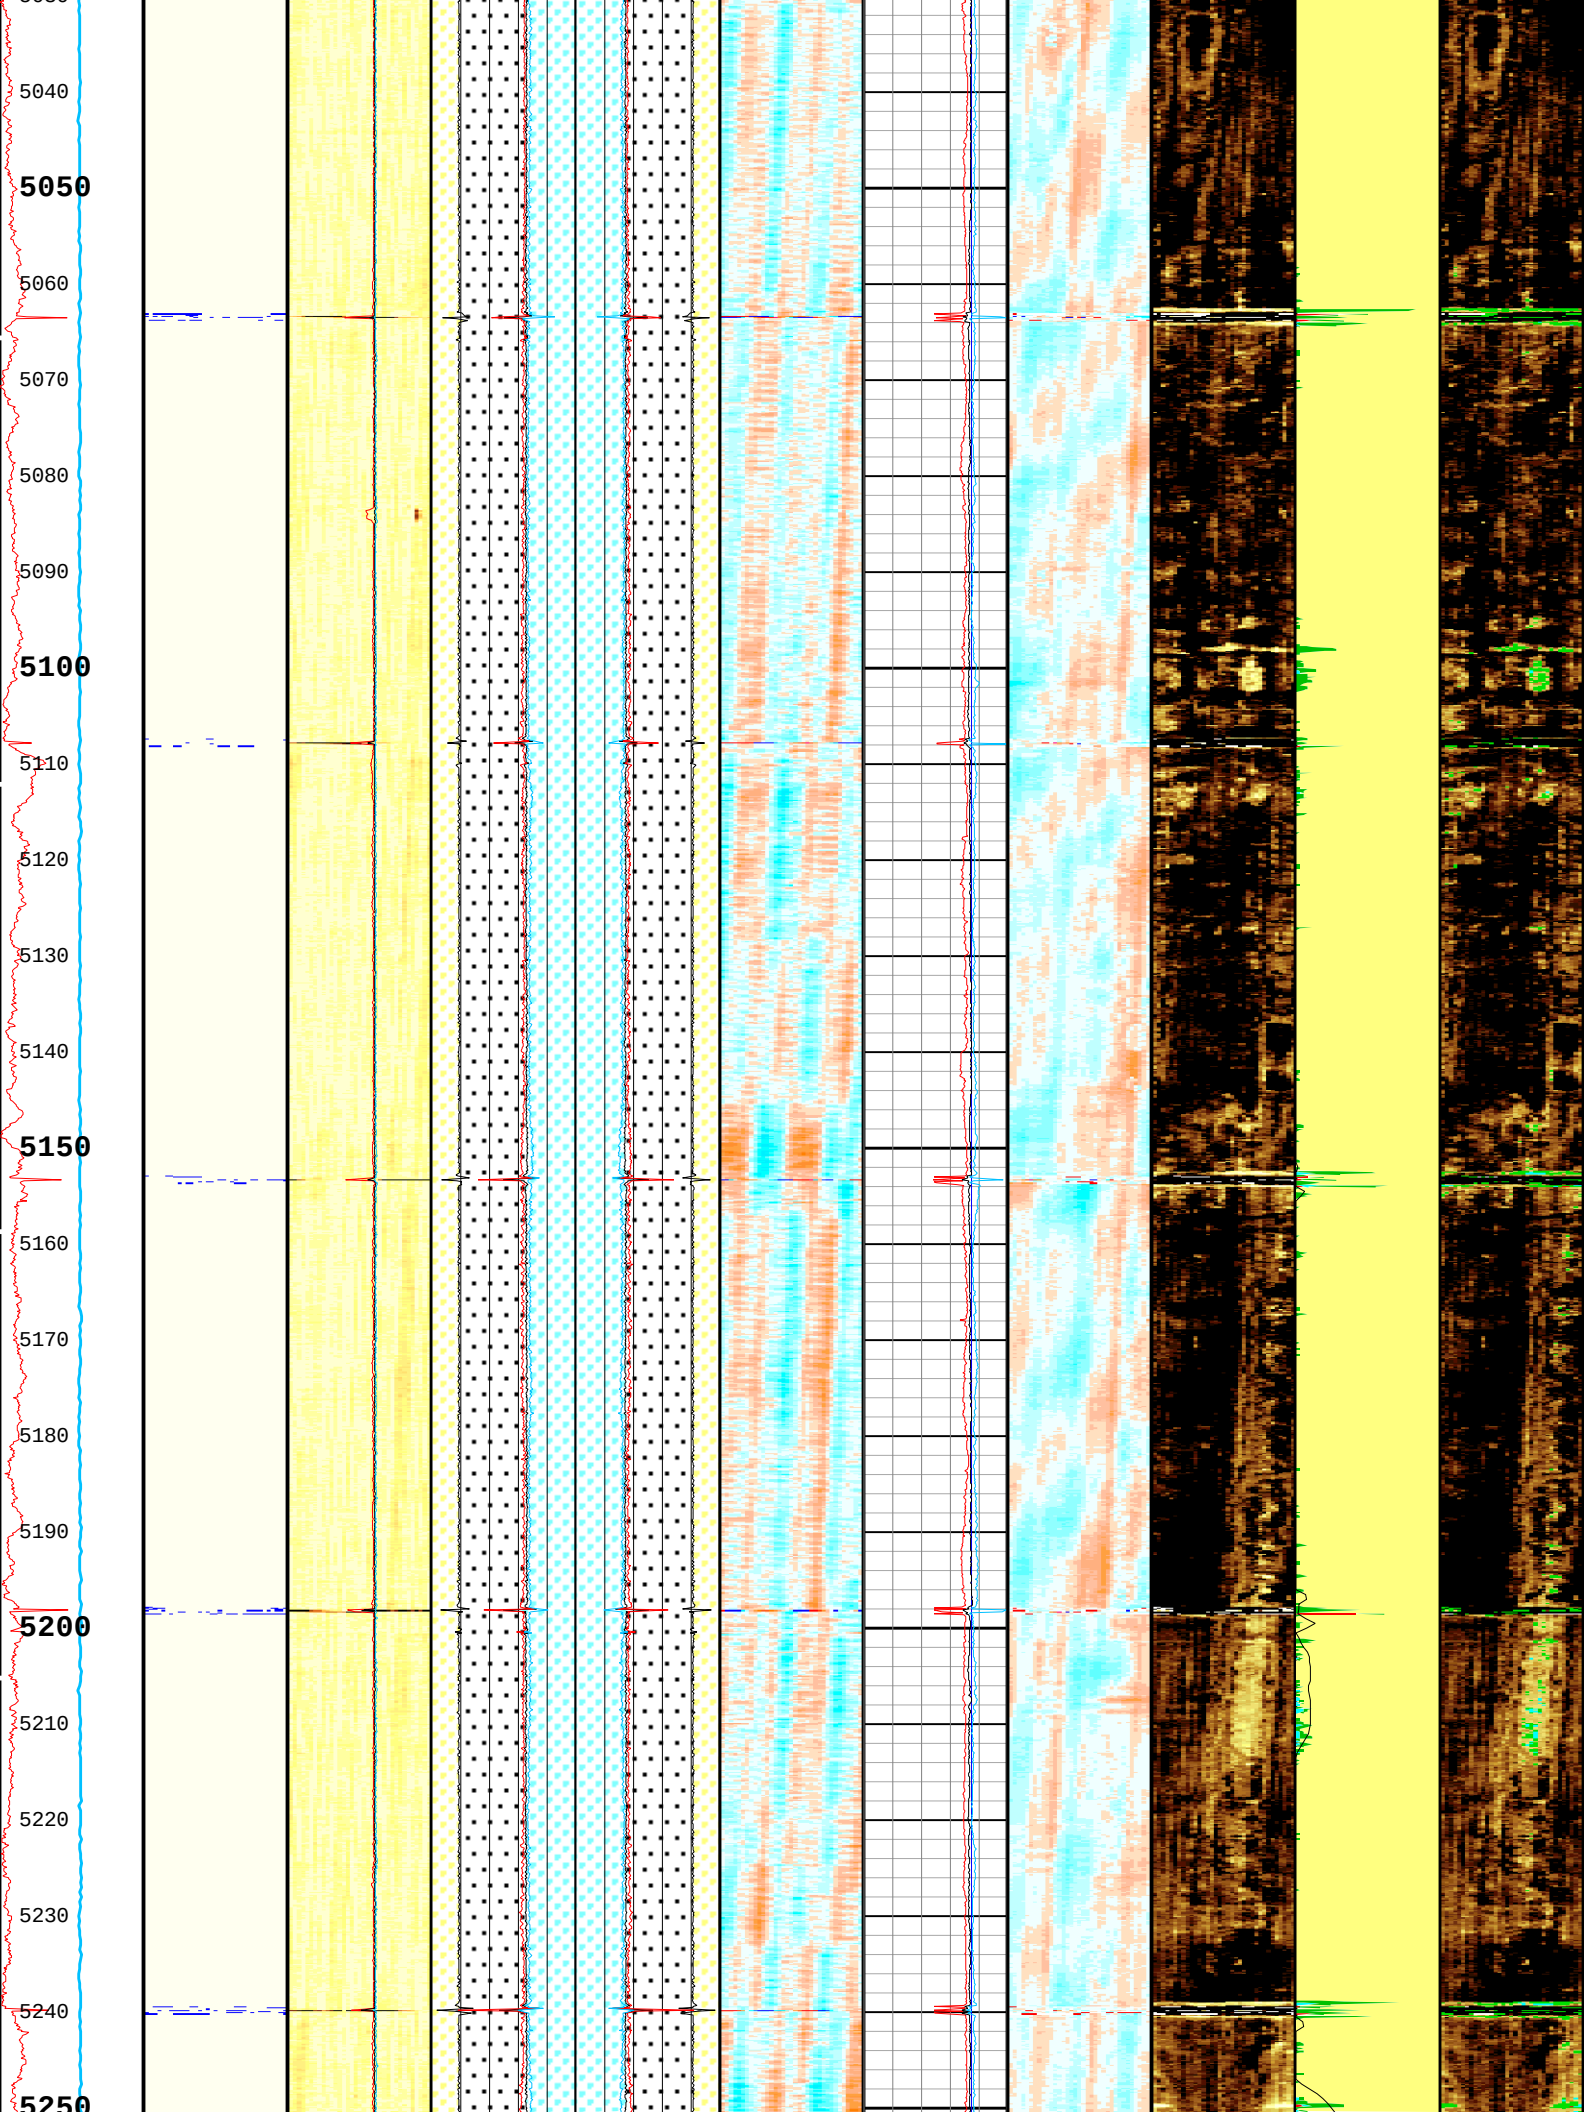
5040
5050
5060
5070
5080
5090
5100
5110
5120
5130
5140
5150
5160
5170
5180
5190
5200
5210
5220
5230
5240
5250

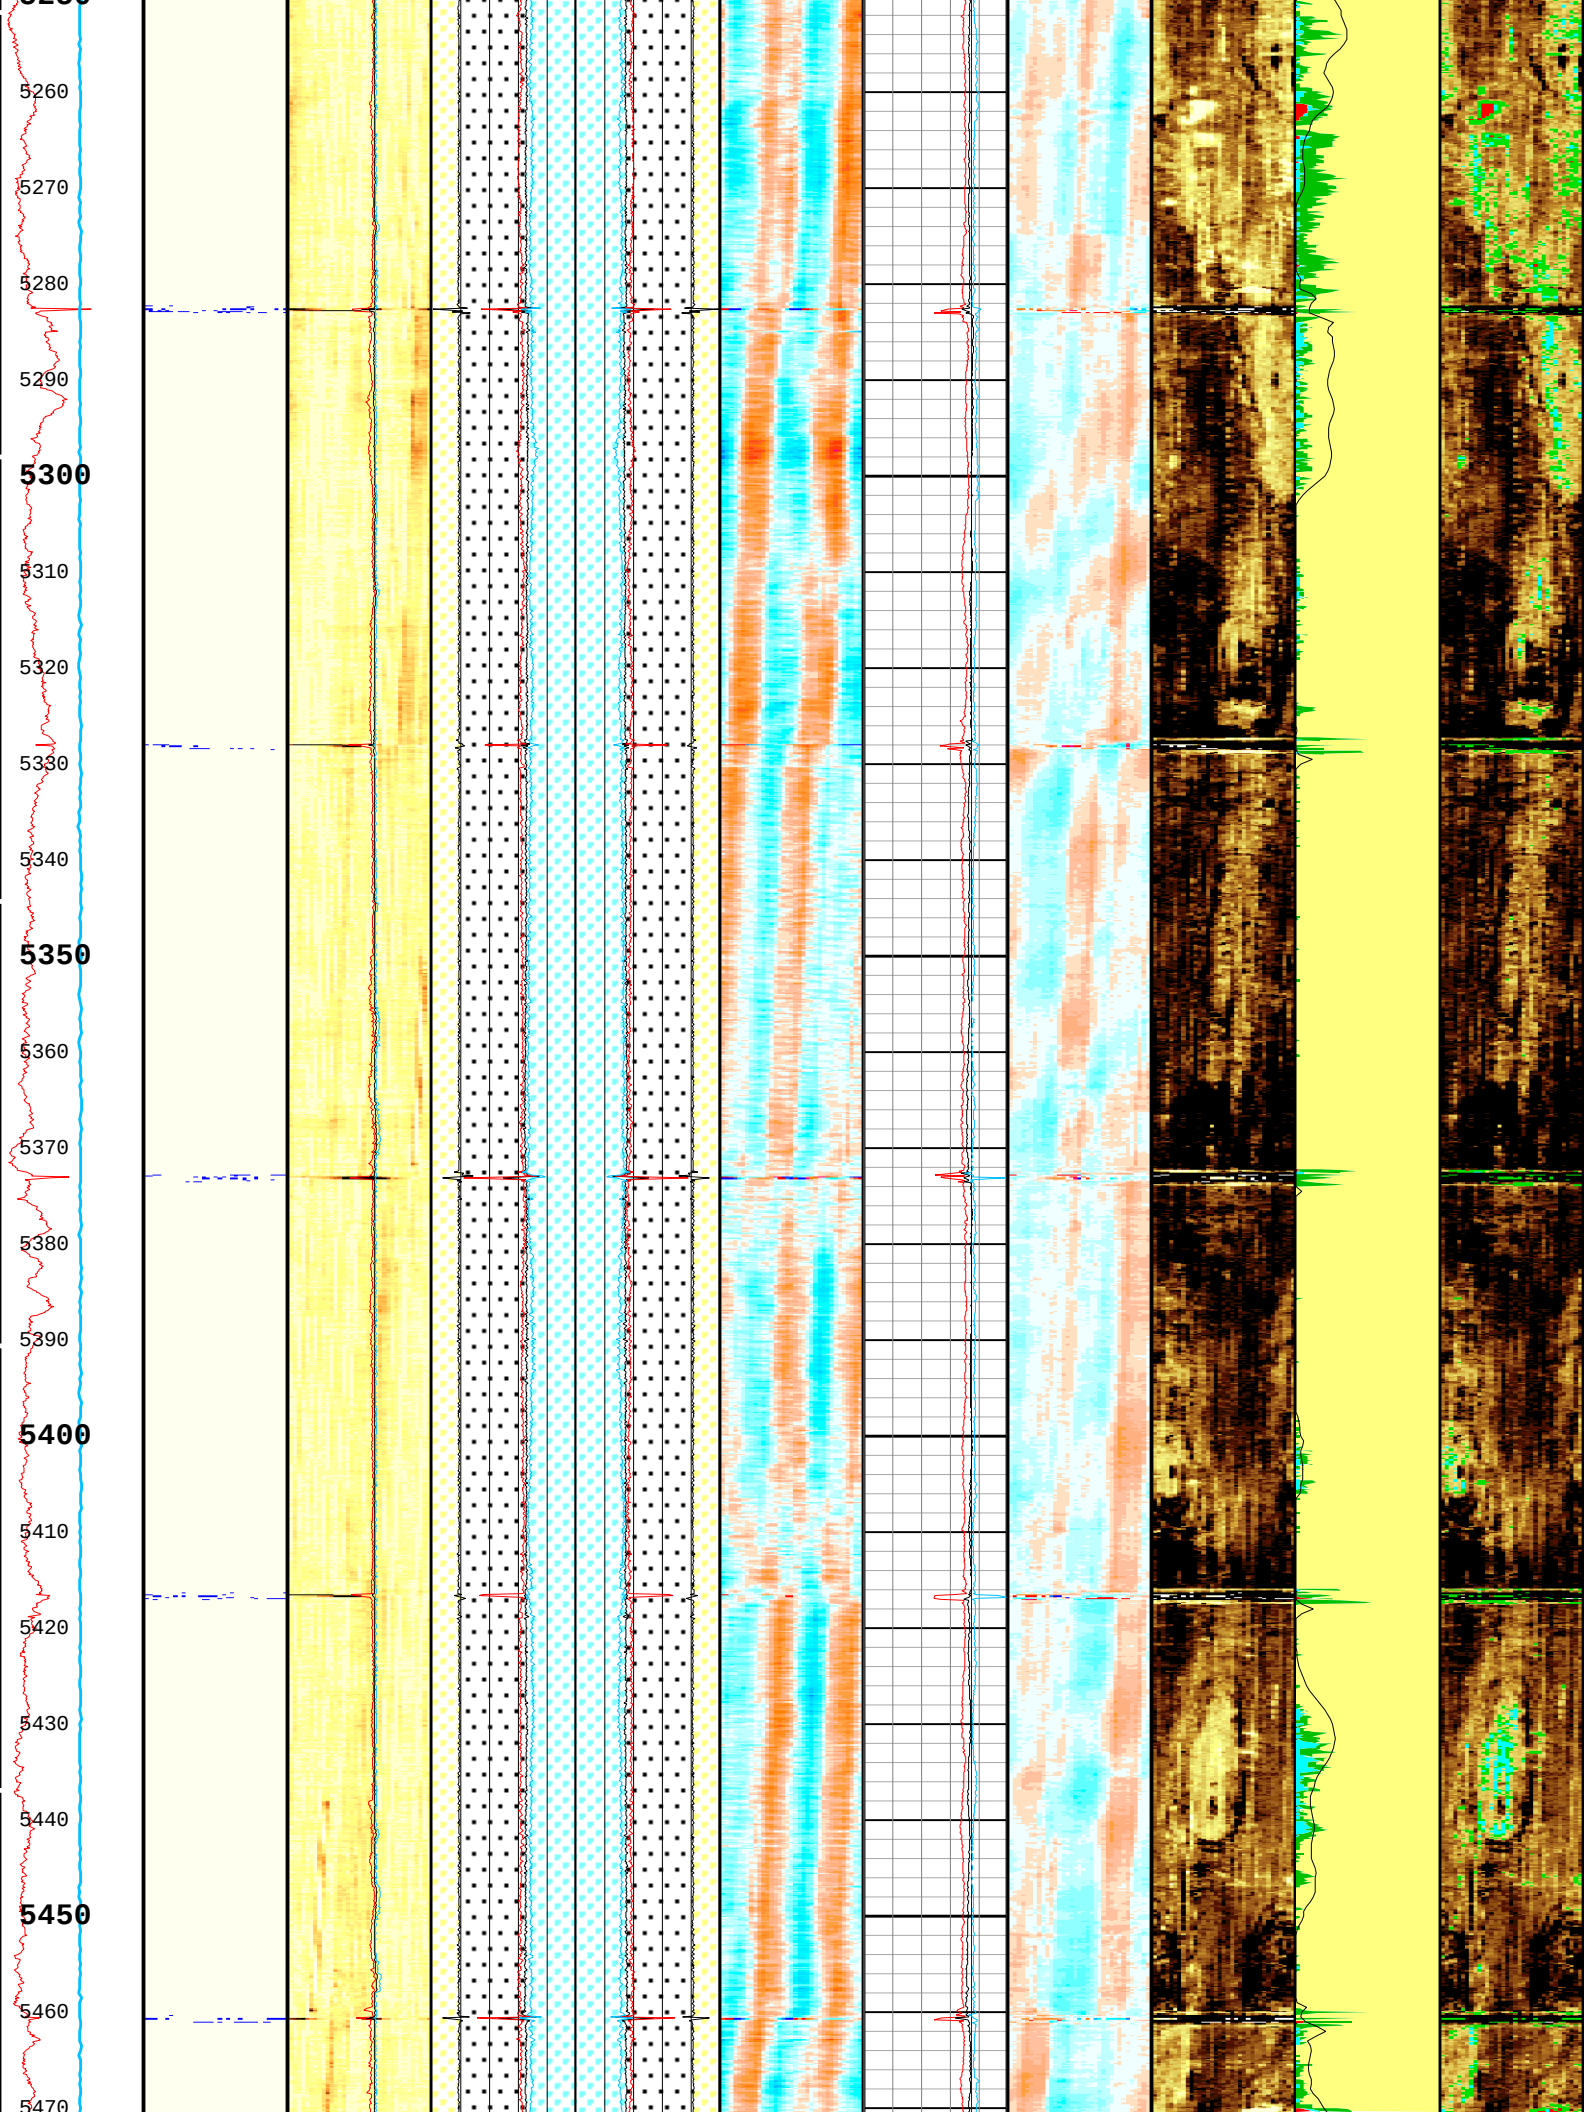
5260
5270
5280
5290
5300
5310
5320
5330
5340
5350
5360
5370
5380
5390
5400
5410
5420
5430
5440
5450
5460
5470

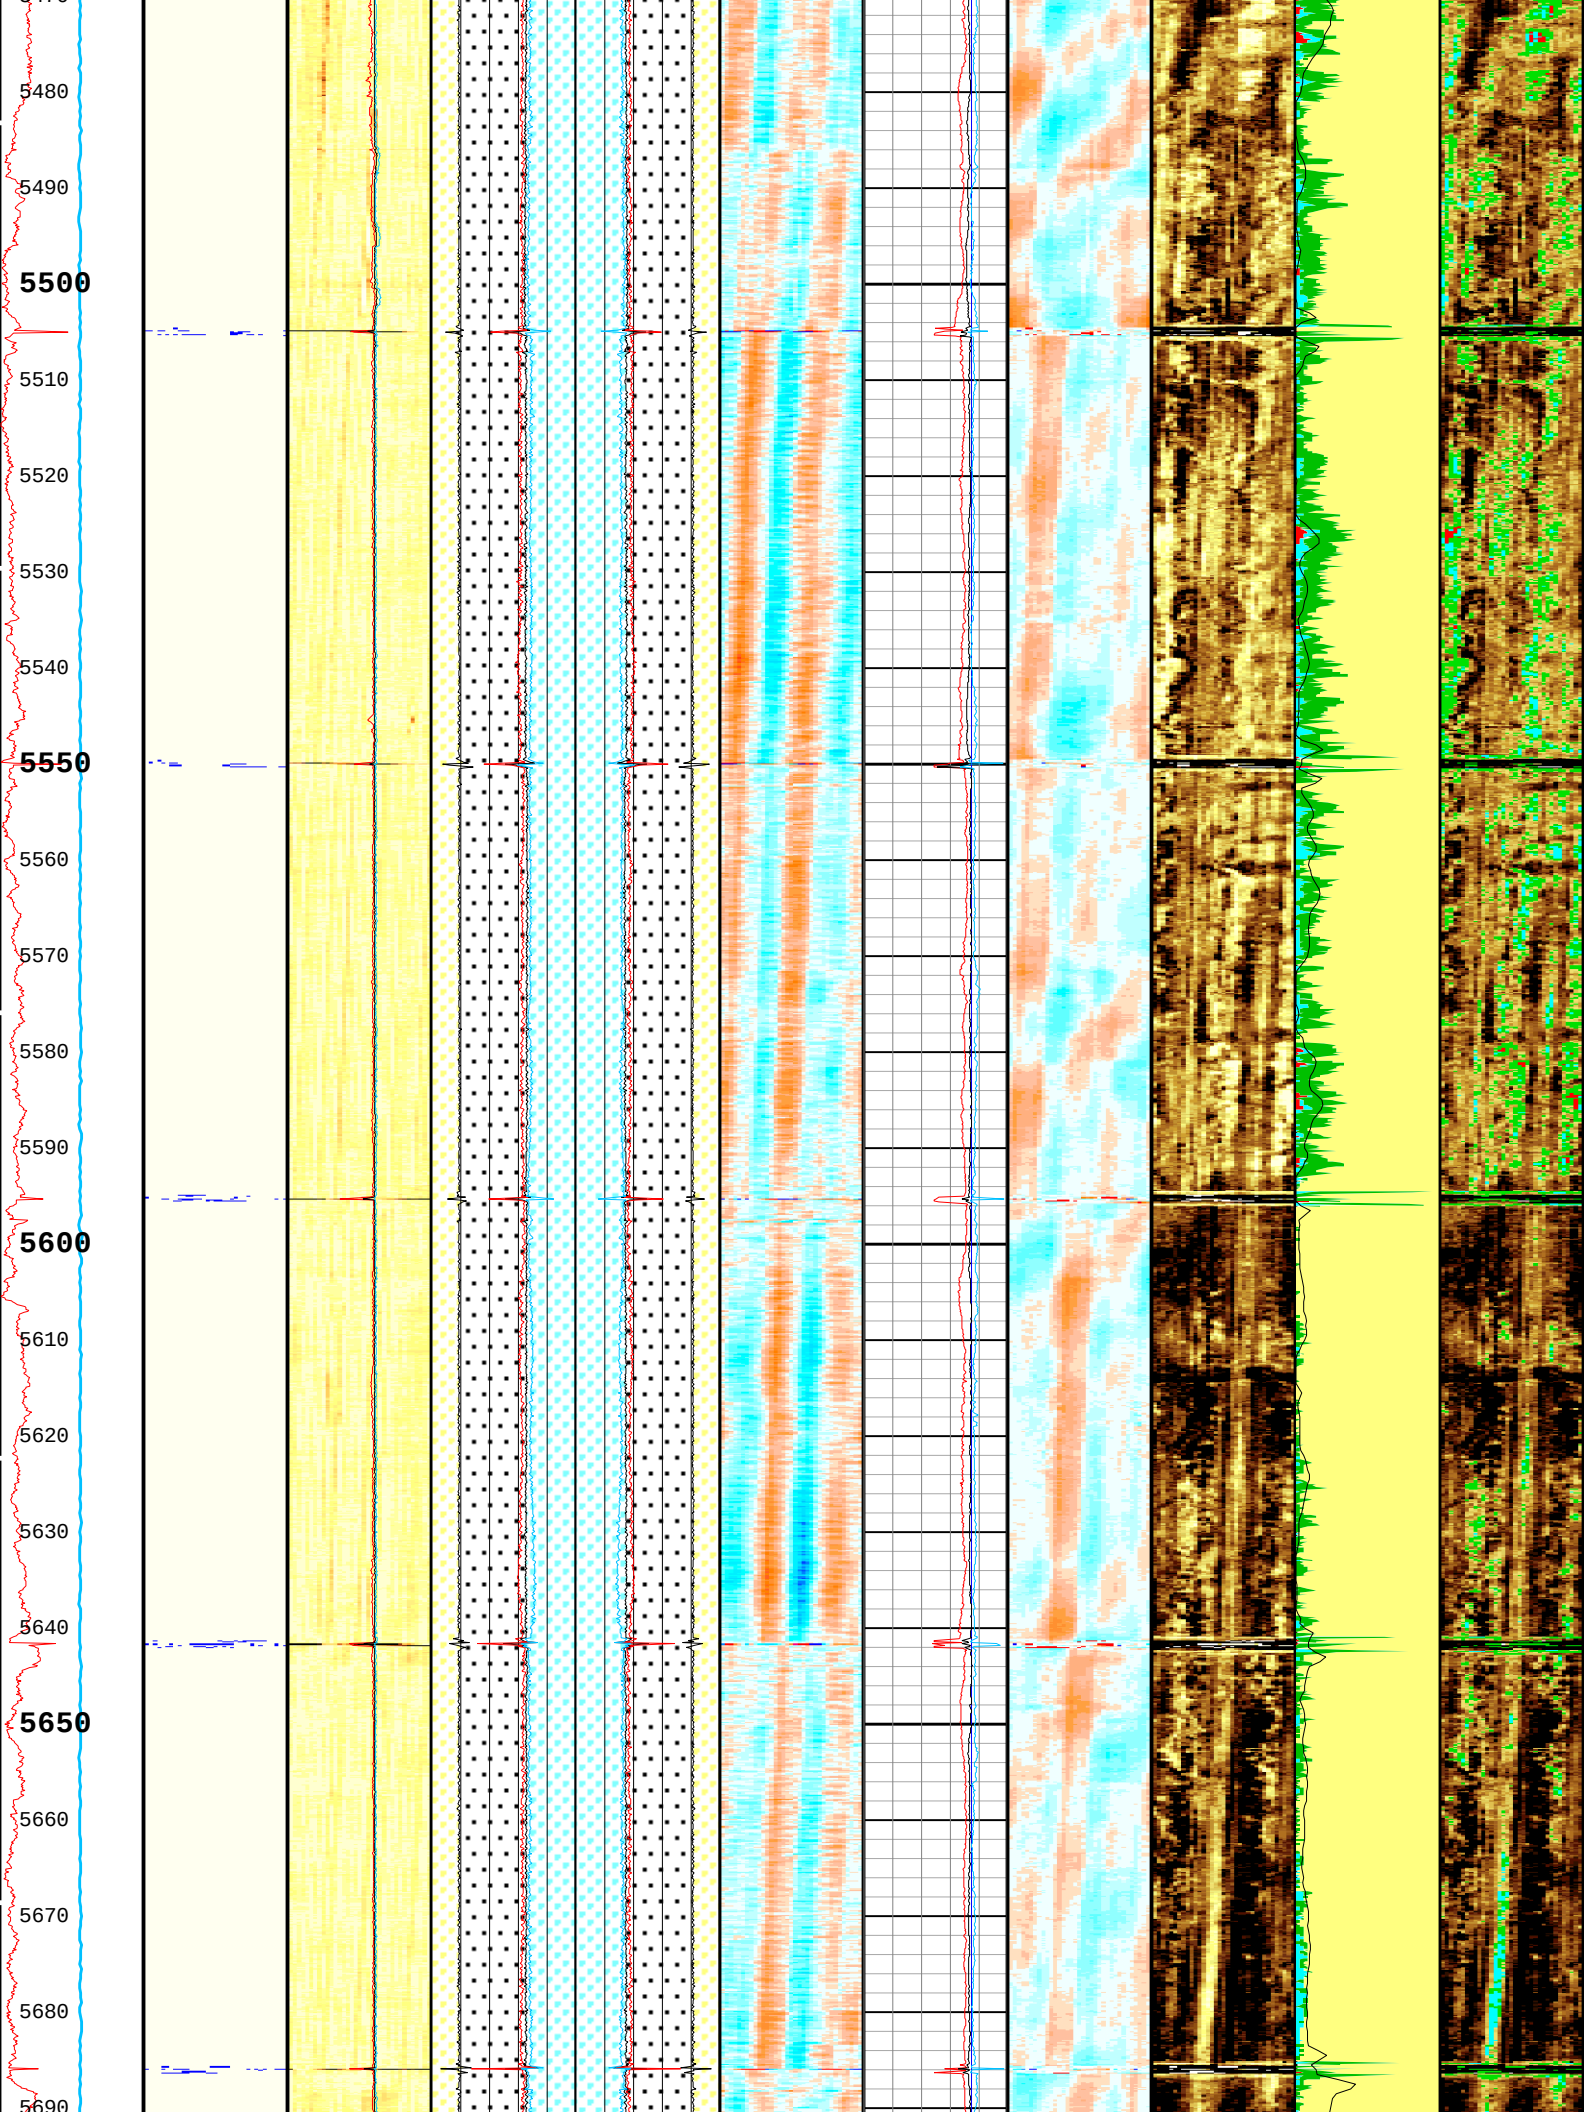
5480
5490
5500
5510
5520
5530
5540
5550
5560
5570
5580
5590
5600
5610
5620
5630
5640
5650
5660
5670
5680
5690

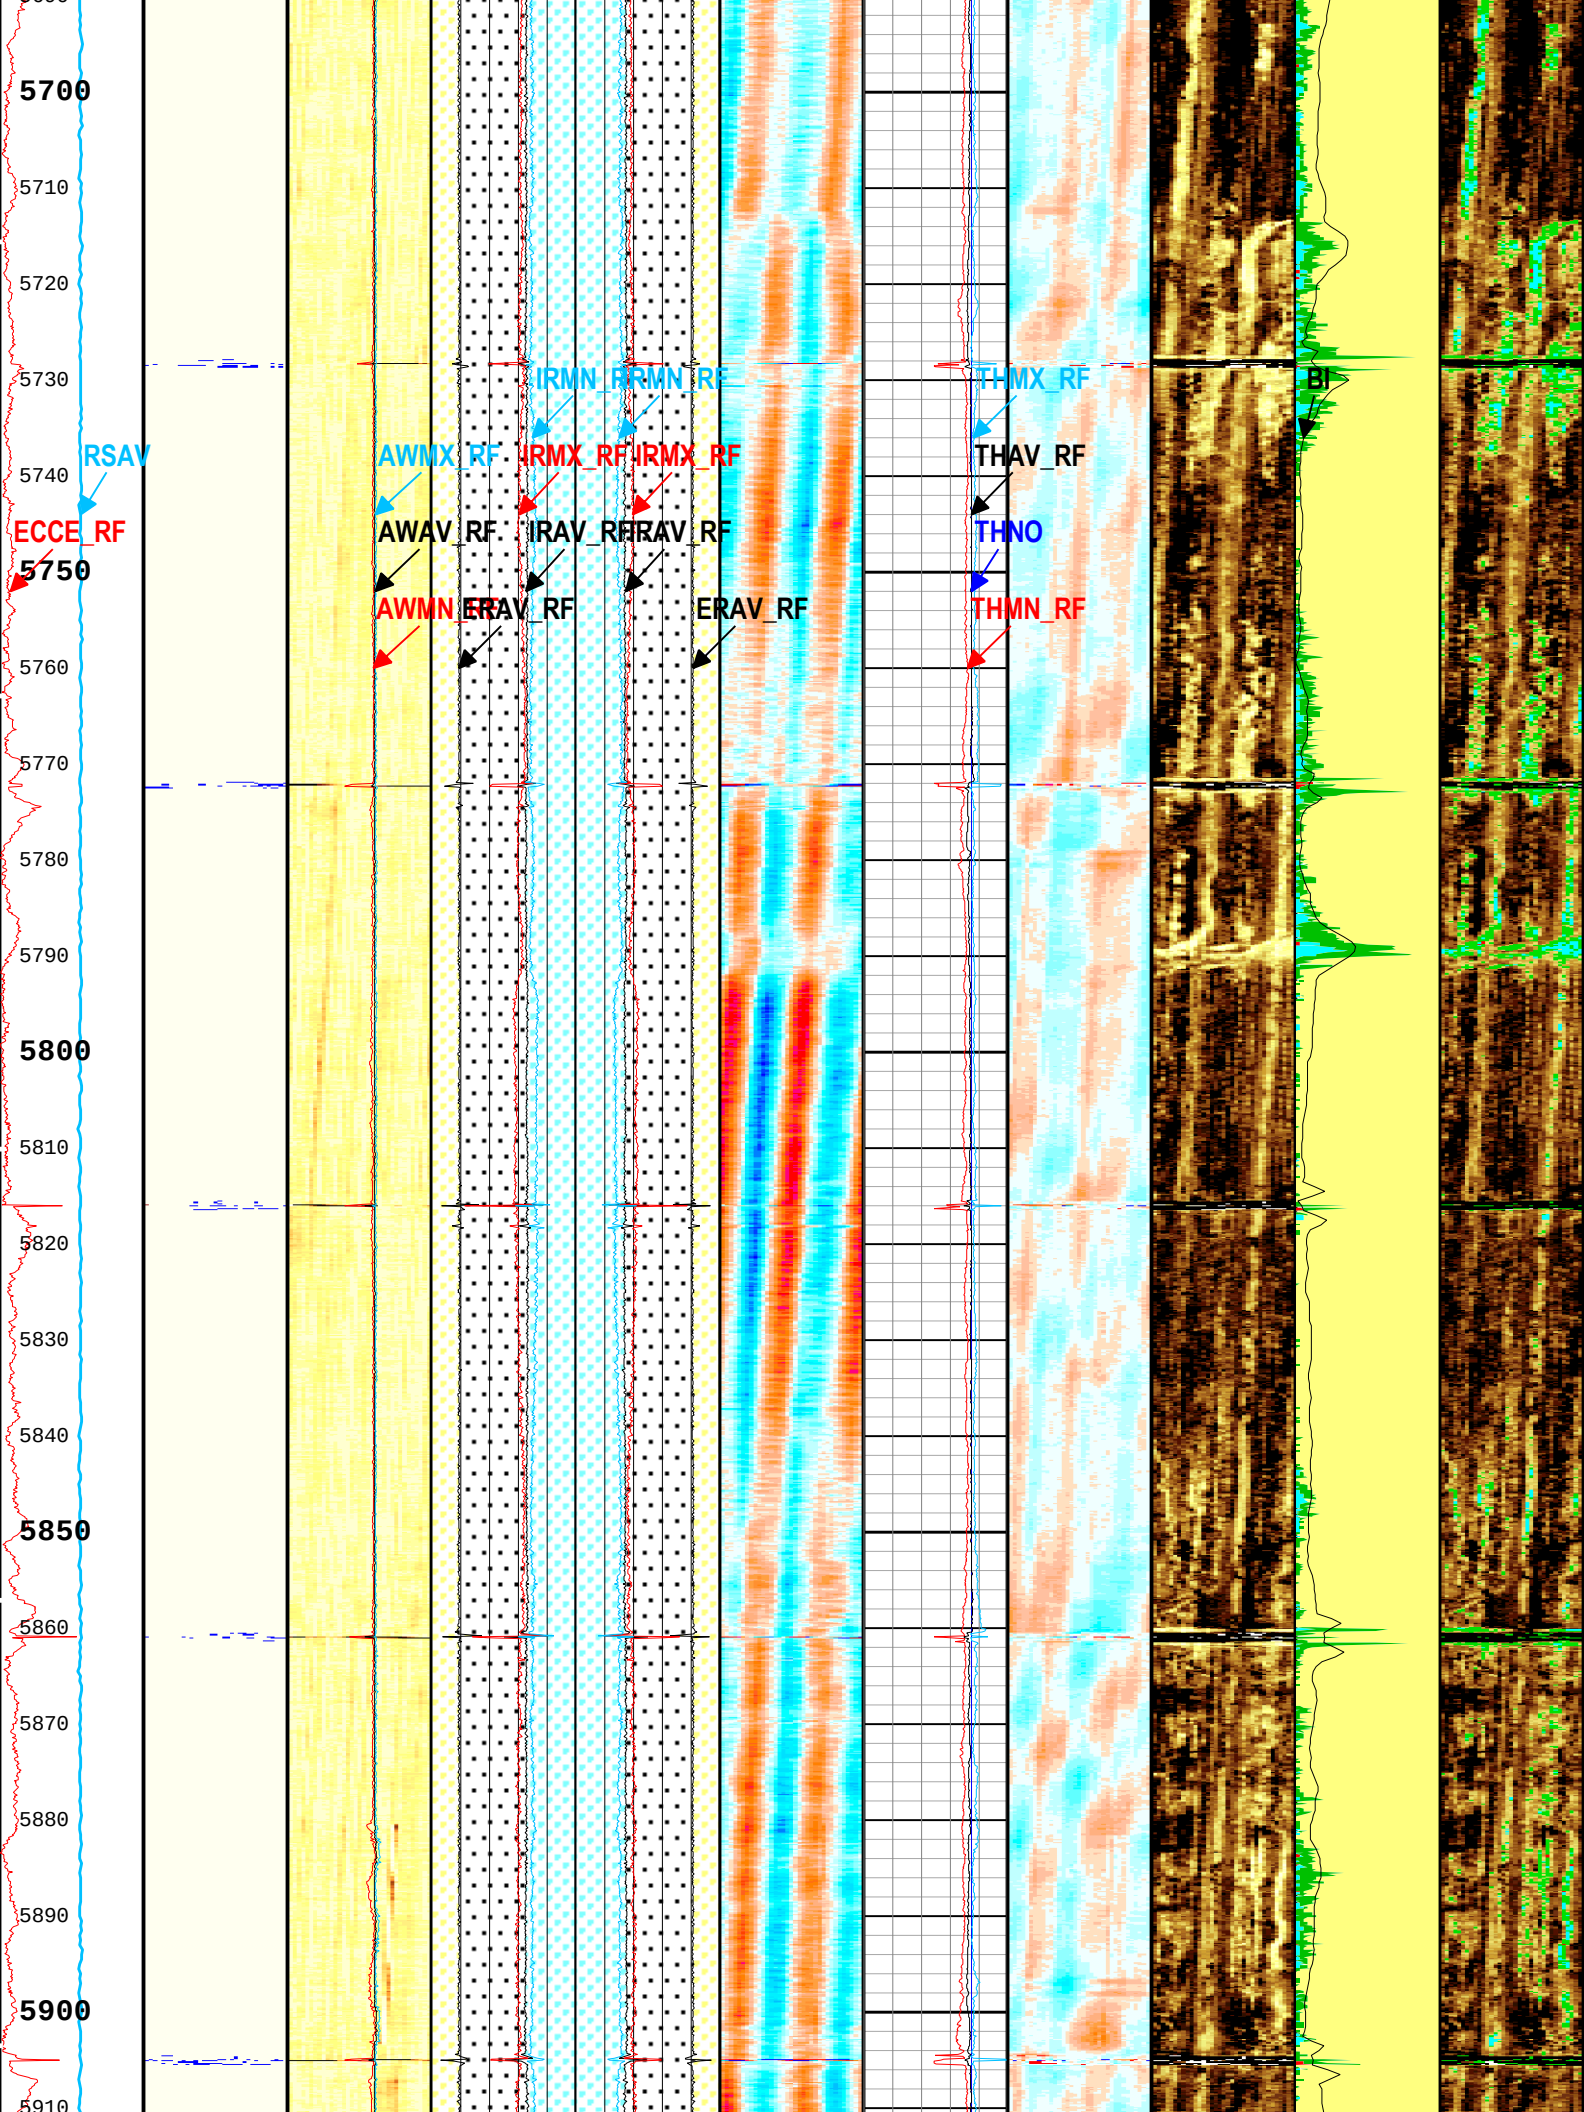
5700
5710
5720
5730
5740
5750
5760
5770
5780
5790
5800
5810
5820
5830
5840
5850
5860
5870
5880
5890
5900
5910
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
BI

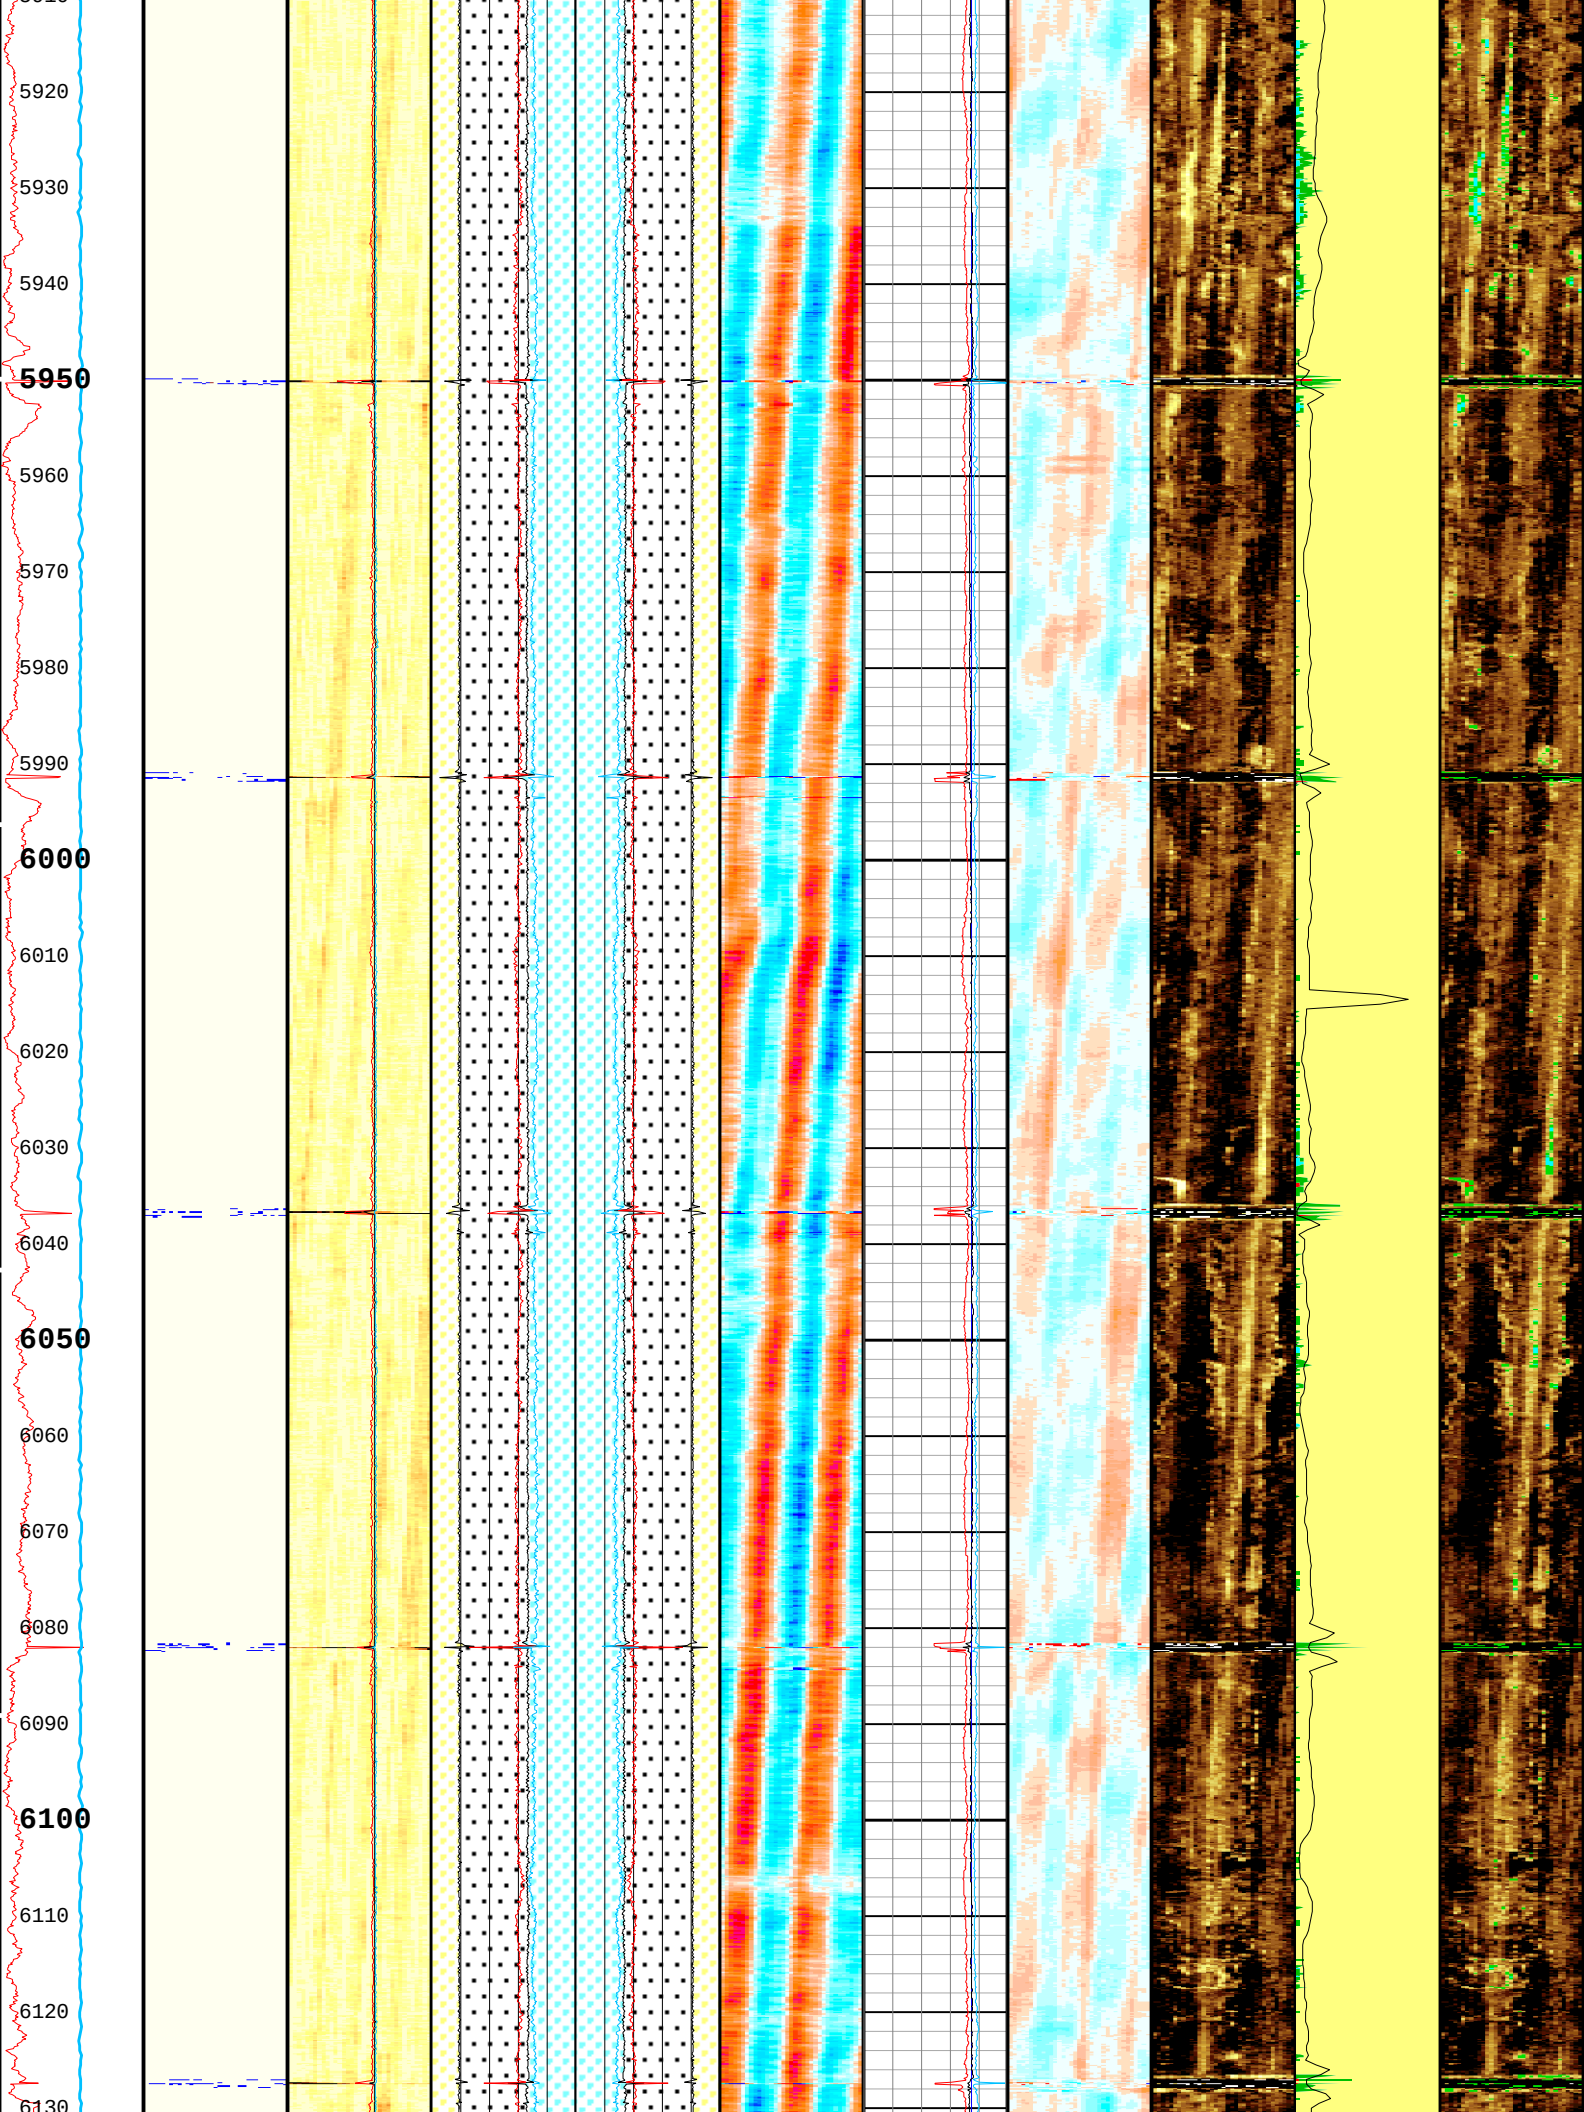
5920
5930
5940
5950
5960
5970
5980
5990
6000
6010
6020
6030
6040
6050
6060
6070
6080
6090
6100
6110
6120
6130

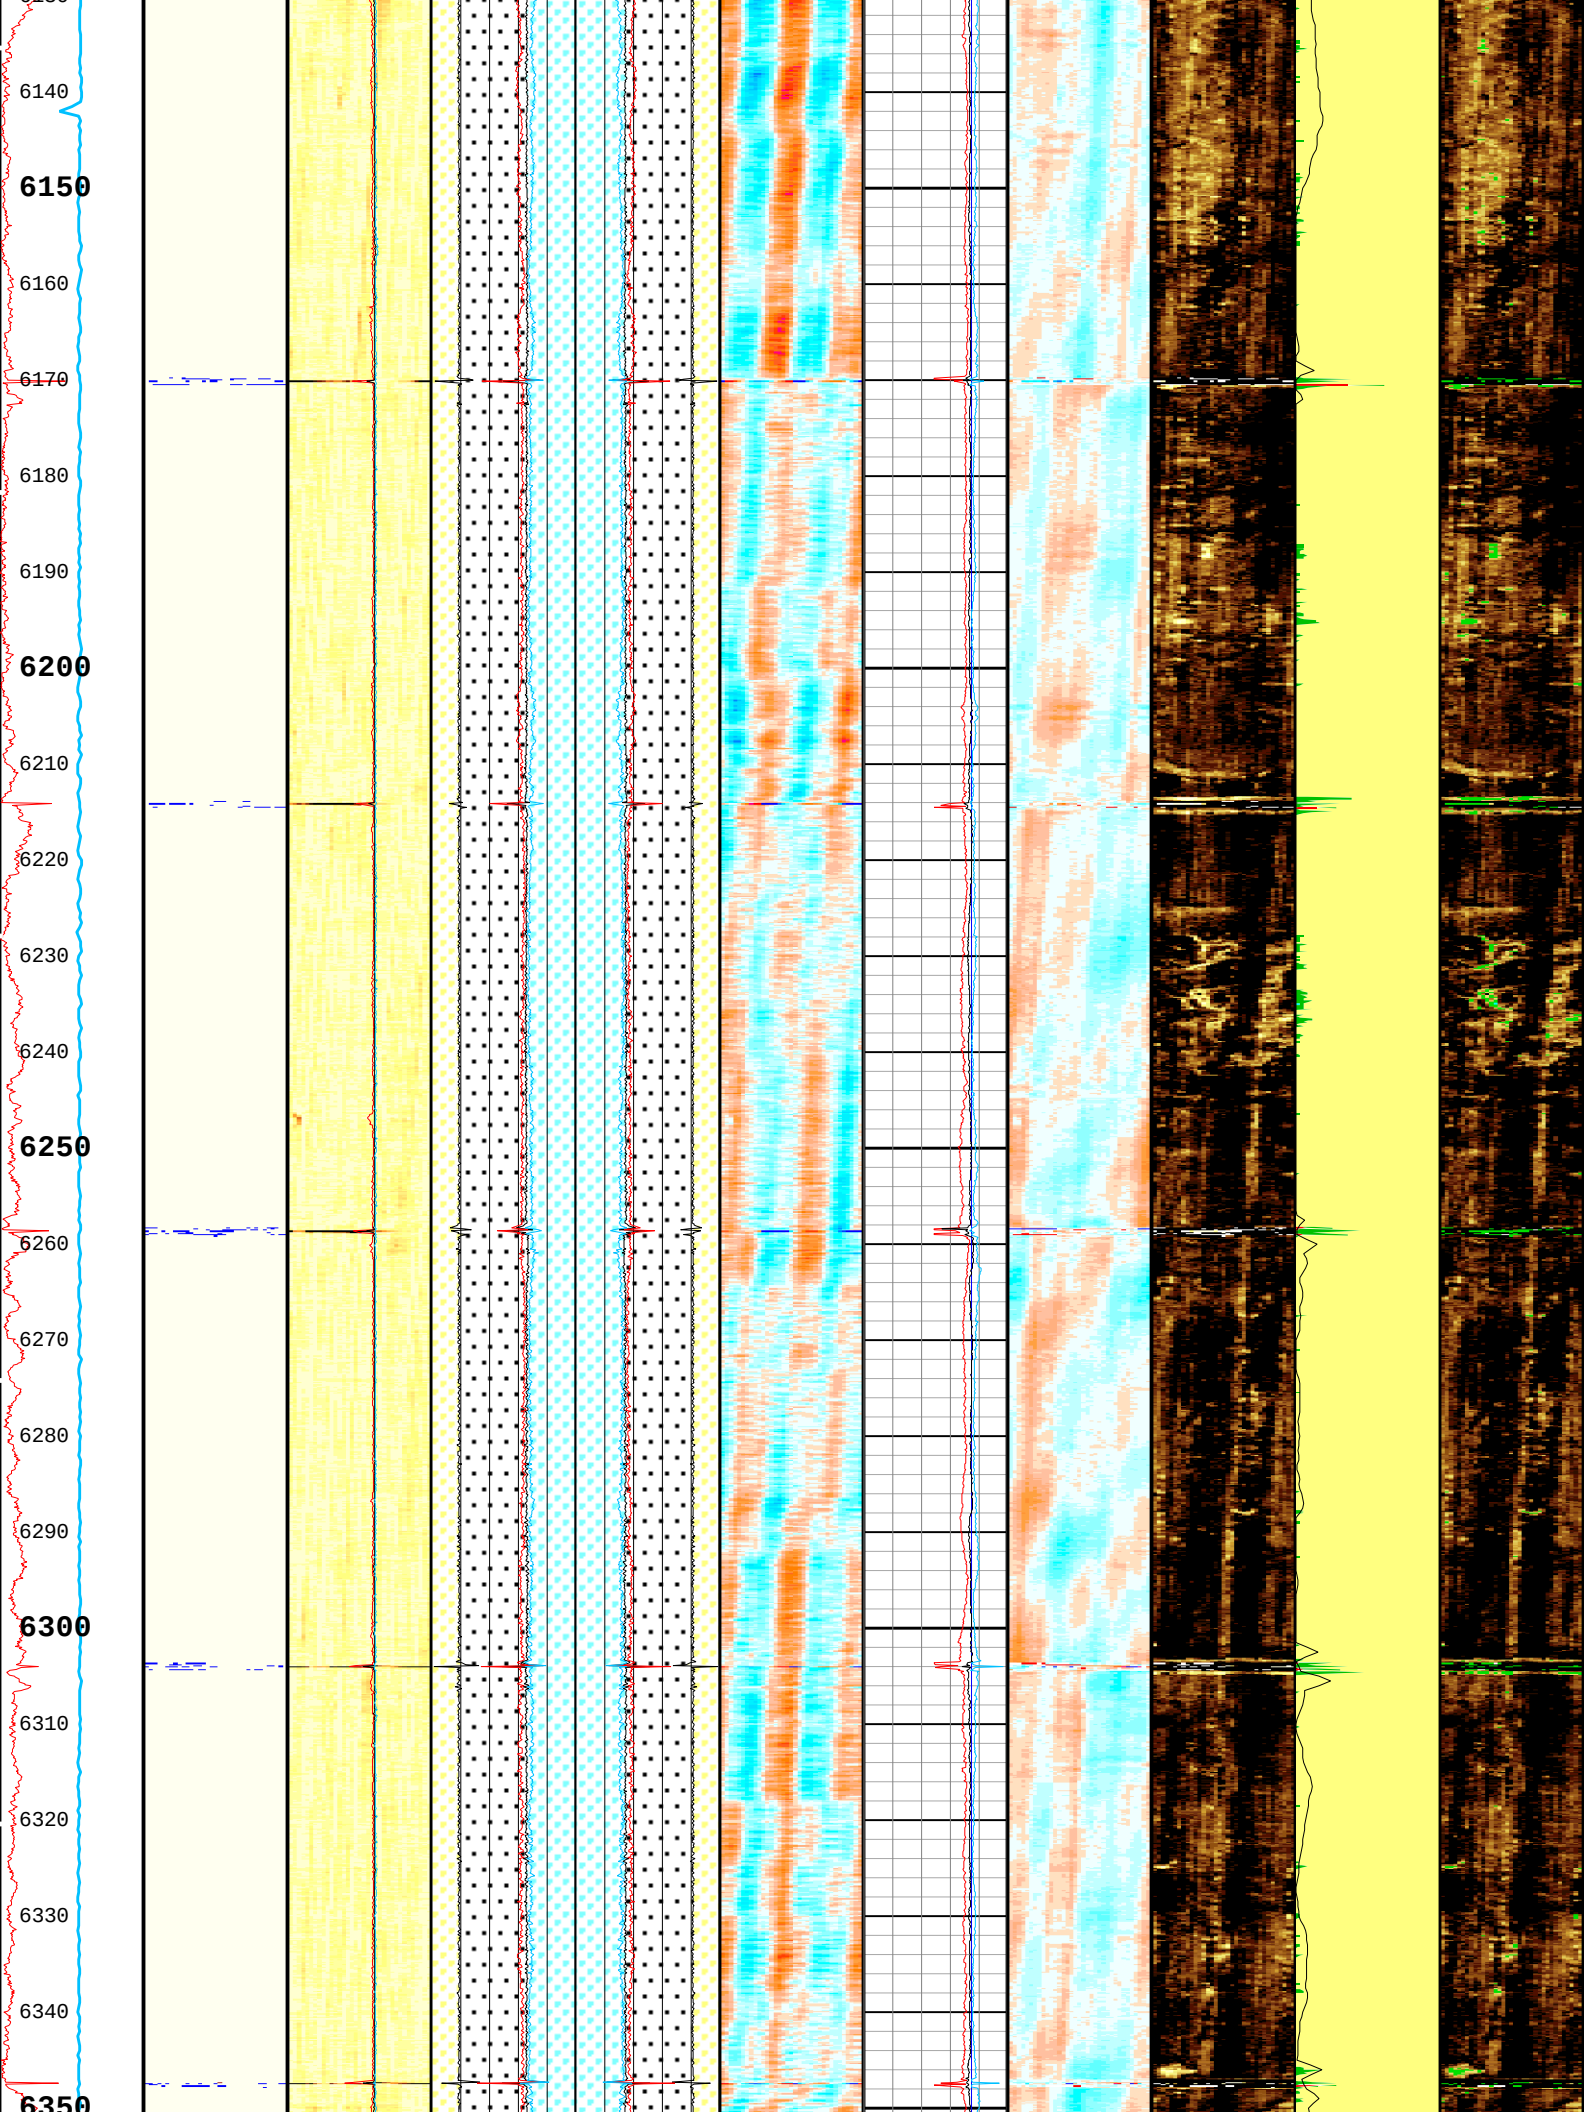
6140
6150
6160
6170
6180
6190
6200
6210
6220
6230
6240
6250
6260
6270
6280
6290
6300
6310
6320
6330
6340
6350

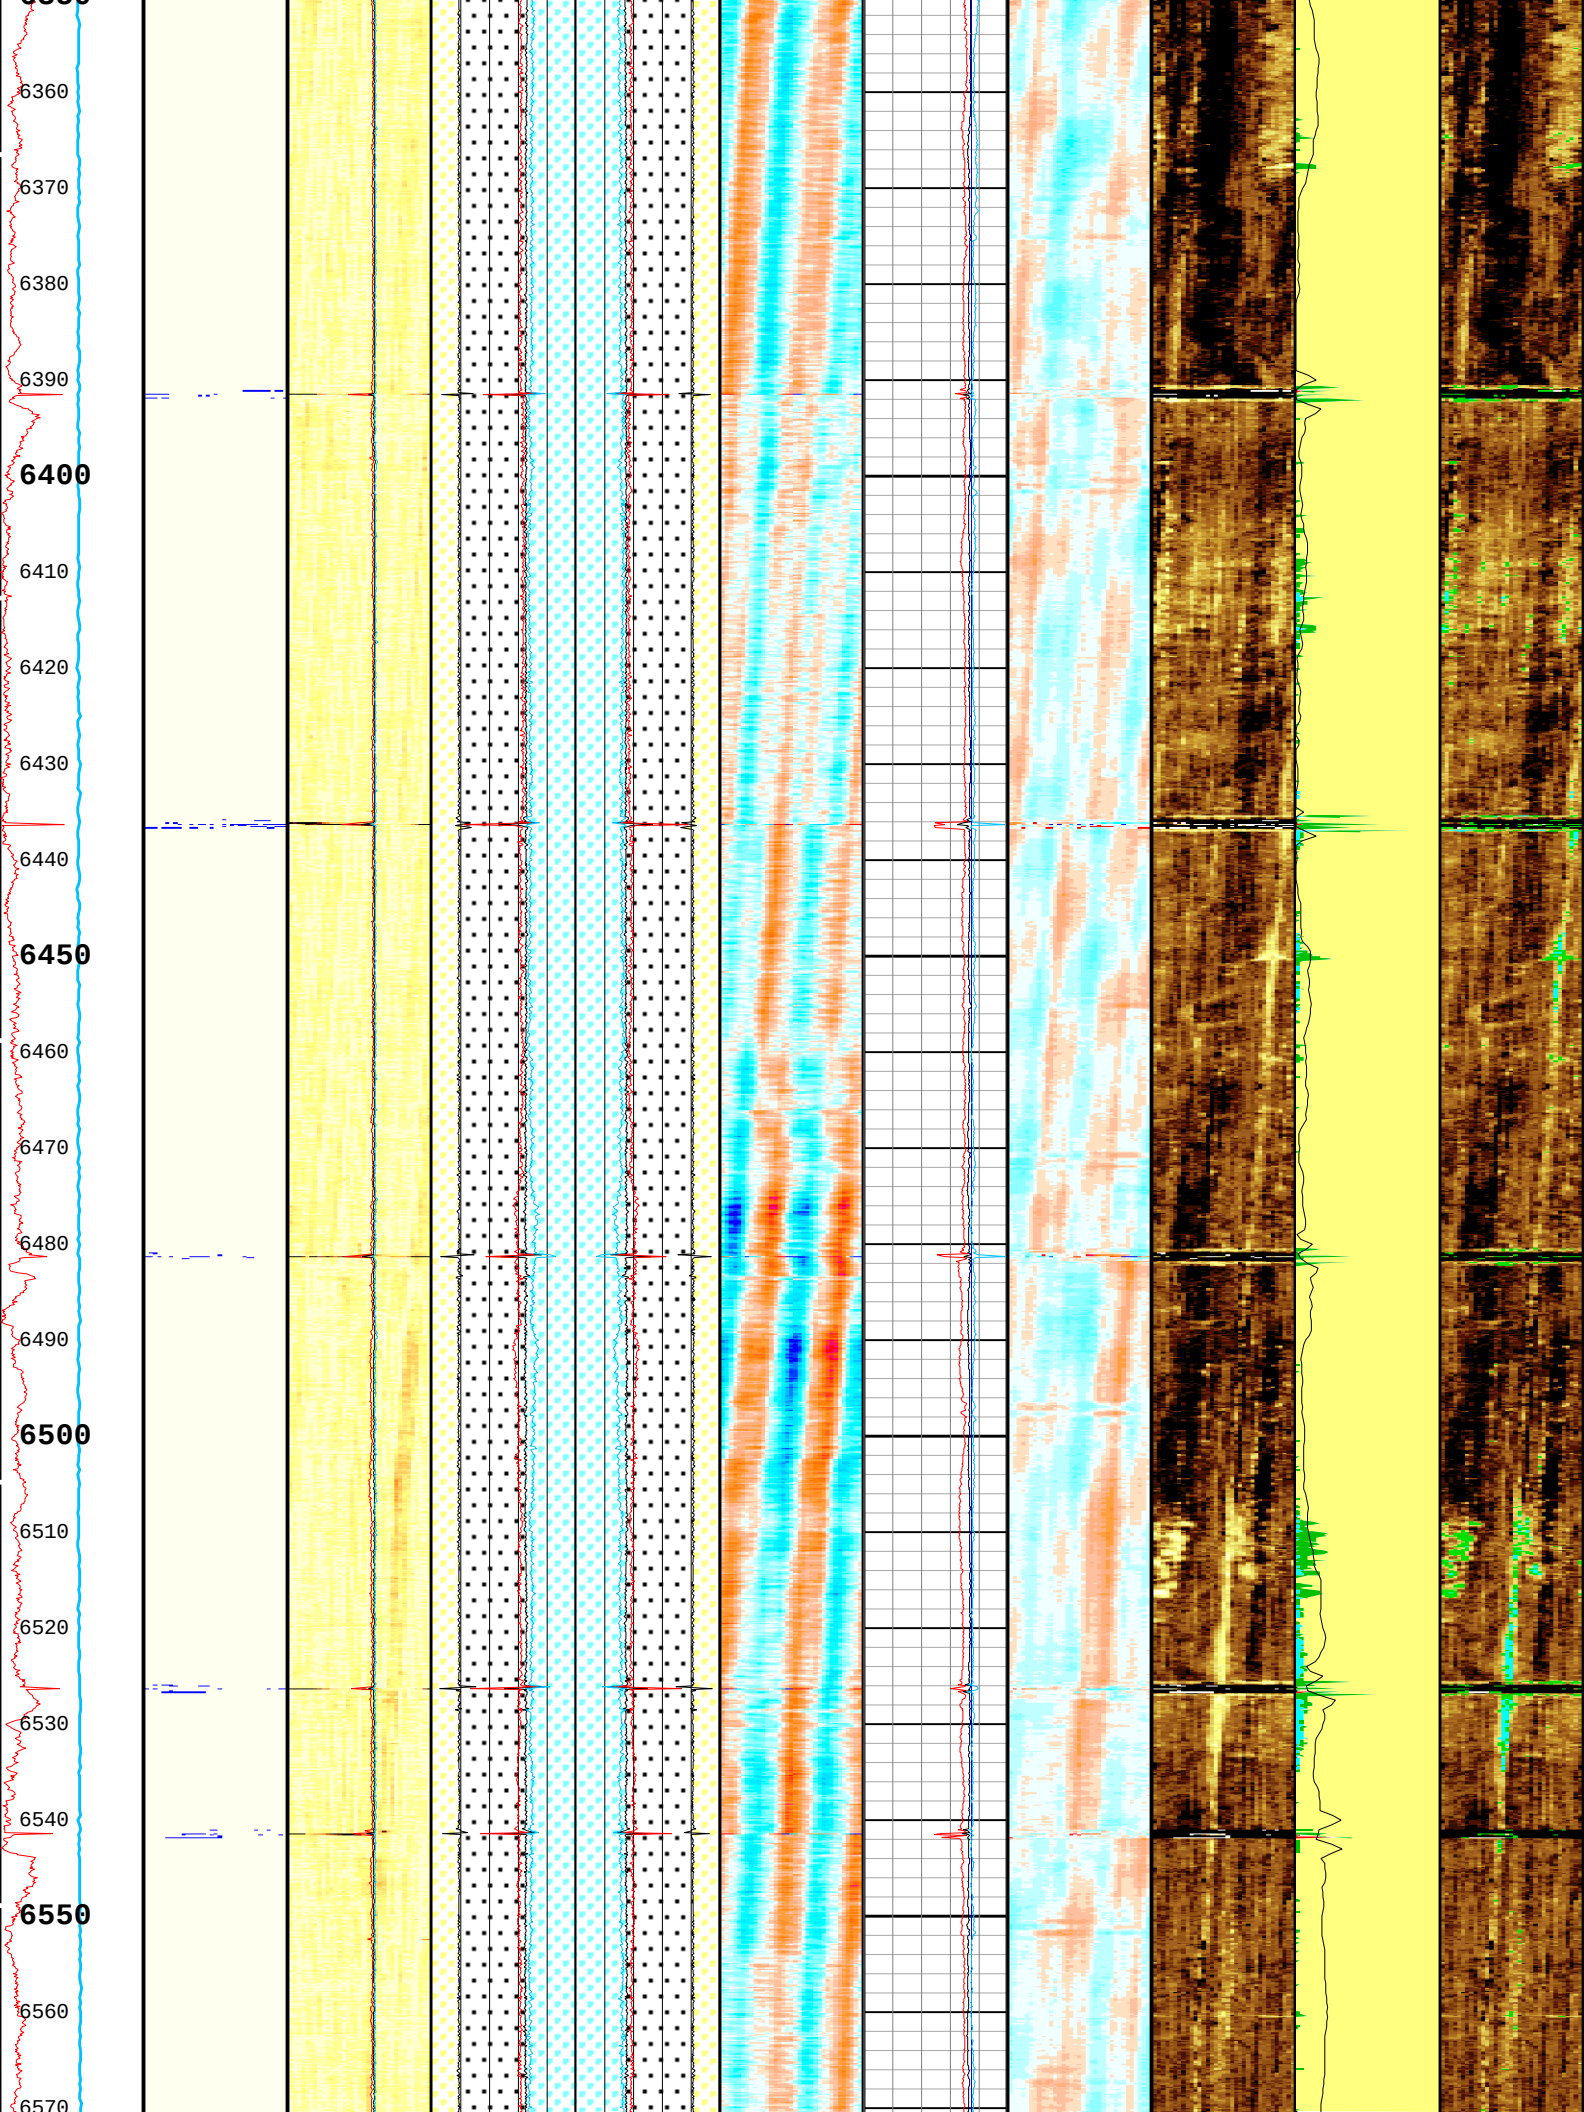
6360
6370
6380
6390
6400
6410
6420
6430
6440
6450
6460
6470
6480
6490
6500
6510
6520
6530
6540
6550
6560
6570

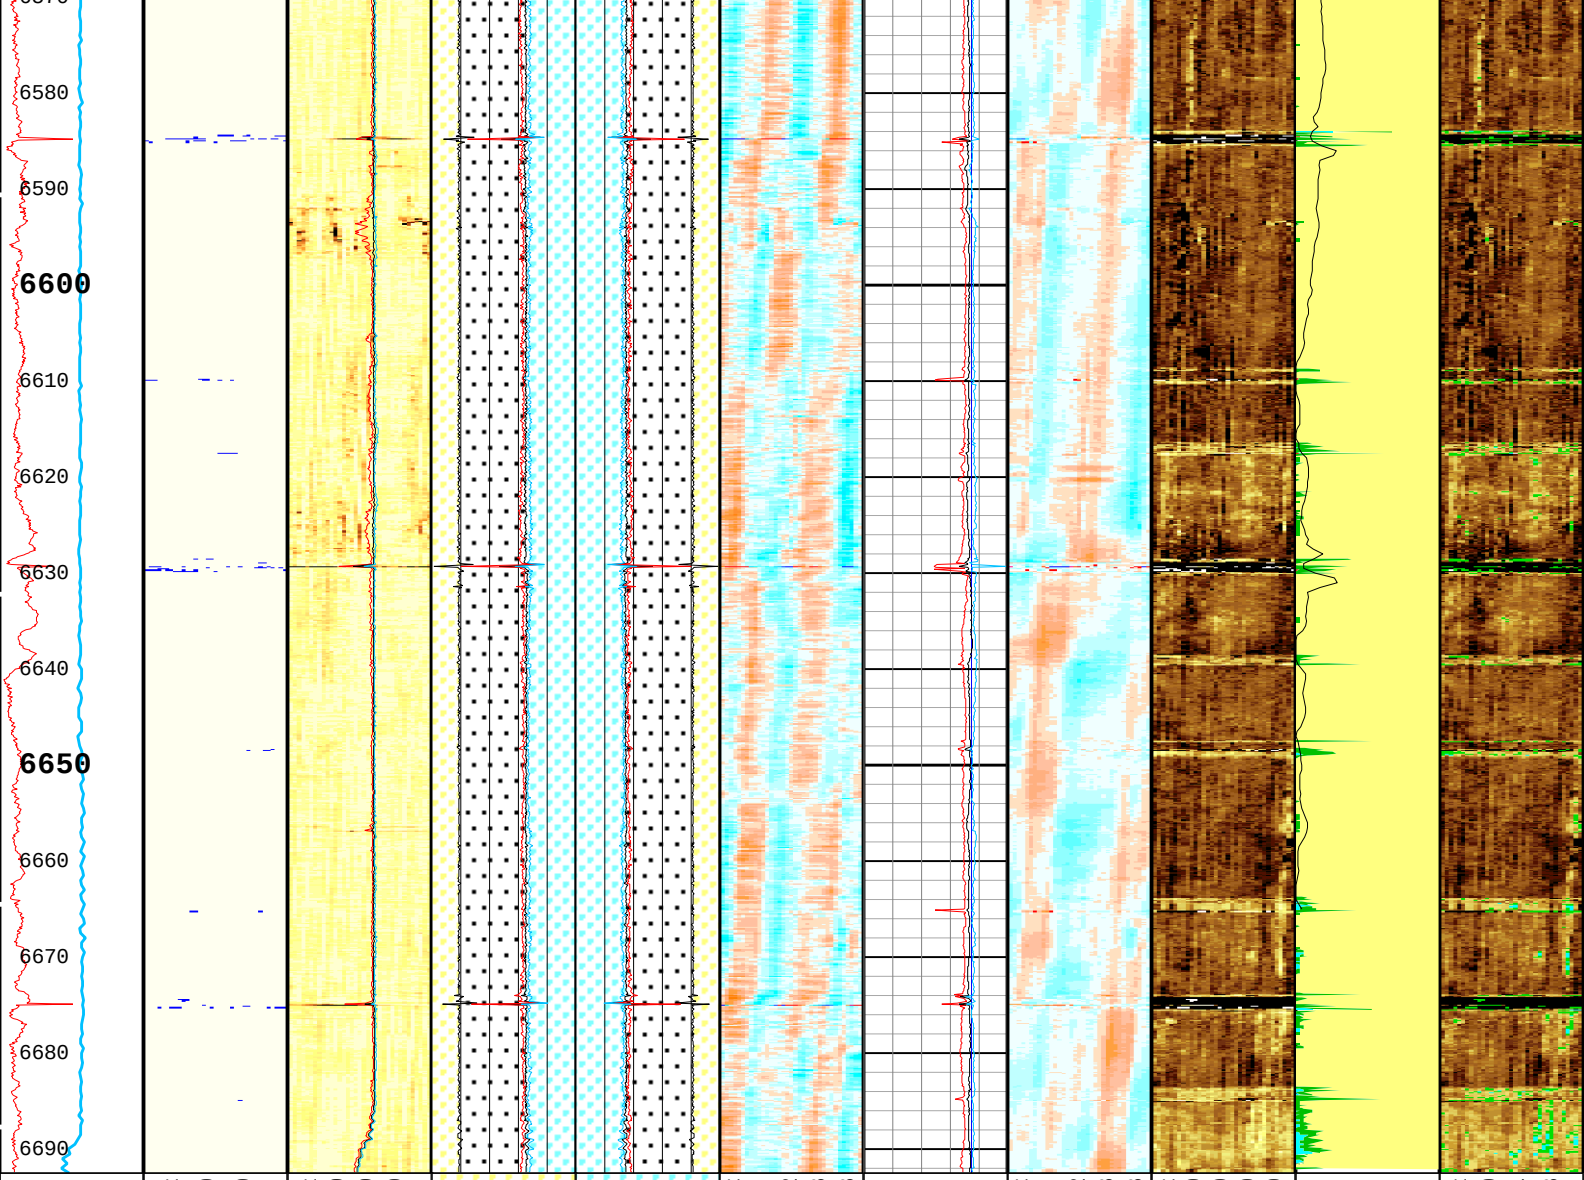

Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E[1]
0 in 0.5

Motor Revolution Speed (RSAV) USIT-E[1]
6 c/s 8

Absent 1.500 3.500
Explicit Normalization
USIT - USIT Processing Flags (UFLG) USIT-E[1]

USIT Processing Flags (UFLG[0]) USIT-E[1]
1 5

Absent -4.799 -2.799 -0.800
Explicit Normalization
USIT - Amplitude of Unflagged Wave (AWBK_RF) USIT-E[1] (dB)

Minimum of Unflagged Wave Amplitude (AWMN_RF) USIT-E[1]
0 dB 75

Average of Unflagged Wave Amplitude (AWAV_RF) USIT-E[1]
0 dB 75

ERAV
ERAV-IRAV
IRAV

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
5 in 4

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
5 in 4

Maximum of Unflagged Internal Radii (IRMX_RF)

IRAV
ERAV
IRAV-ERAV

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
4 in 5

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF)

Absent -0.051 -0.012 0.028 0.068
Explicit Normalization
USIT - Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E[1] (in)

Minimum of Unflagged Casing Thickness (THMN_RF) USIT-E[1]
0.1 in 0.6

Nominal Casing Thickness (THNO) USIT-E[1]
0.1 in 0.6

Median of Unflagged Casing Thickness (THAV_RF) USIT-E[1]
0.1 in 0.6

Maximum of Unflagged Casing Thickness (THMX_RF)

Absent -0.051 -0.012 0.028 0.068
Explicit Normalization
USIT - Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E[1] (in)

Absent 1.500 3.500 5.500 7.500
Custom Normalization
USIT - Acoustic Impedance (AIBK) USIT-E[1] (Mrayl)

Ratio of Cement Measurements to Total (CEMR) USIT-E[1]
1 0

Micro-debonding Ratio (MDR) USIT-E[1]
1 0

Ratio of Gas Measurements to Total (GASR) USIT-E[1]
1 0

Bonded
Gas
Liquid

Absent 3.090 5.054 7.018
Custom Normalization
USIT - Acoustic Impedance (AIBK) USIT-E[1] (Mrayl)

Absent 2.599 4.563 6.527
Custom Normalization
USIT - Acoustic Impedance With Micro-debonding Image (AI_MDEBOND_IMG) USIT-E[1] (Mrayl)

Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E[1]
0 dB 75

(IRMX_RF) USIT-E[1]
5 in 4

USIT-E[1]
4 in 5

USIT-E[1]
0.1 in 0.6

Micro-debonding

Bond Index (BI) DSLT-H[1]
1 0

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
5 in 4

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
4 in 5

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E[1]

1 - UFLG 1 Value within [0.0 - 1.5] - :	UTIM Error
2 - UFLG 2 Value within [1.5 - 2.5] - :	Pulse Origin Not Detected
3 - UFLG 3 Value within [2.5 - 3.5] - :	WINLEN Error
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :	Casing Thickness Error
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :	Loop Processing Error

Description: USI Composite Format: Log (LBV1_USI Composite 9.625inch) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth
Creation Date: 28-Jun-2016 19:07:30

Composite 1

Cement Log 2 IN = 100 FT

Composite Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
28Jun2016	Log[3]:Up	Up	90.40 ft	6692.79 ft	28-Jun-2016 8:34:23 AM	28-Jun-2016 11:17:22 AM	ON	0.00 ft	Yes
28Jun2016	Log[7]:Up	Up	23.45 ft	330.21 ft	28-Jun-2016 1:20:55 PM	28-Jun-2016 1:39:36 PM	ON	6.00 ft	Yes

All depths are referenced to toolstring zero

Log

Company:Southern California Gas Company Well:Porter 72B
Composite 1:S005

Description: USI Cement Format: Log (LBV1_USI Cement 9.625inch) Index Scale: 2 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 28-Jun-2016 19:08:21

TIME_1900 - Time Marked every 60.00 (s)

ERAV_IRAV

ERAV_RHF1

IRAV_LHF1

IRAV_ERAV

LHF1_ERAV

RHF1_IRAV

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
5 in 4

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
4 in 5

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
5 in 4

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
4 in 5

Acoustic Impedance Minimum (AIMN) USIT-E[1]

Minimum of

Minimum of

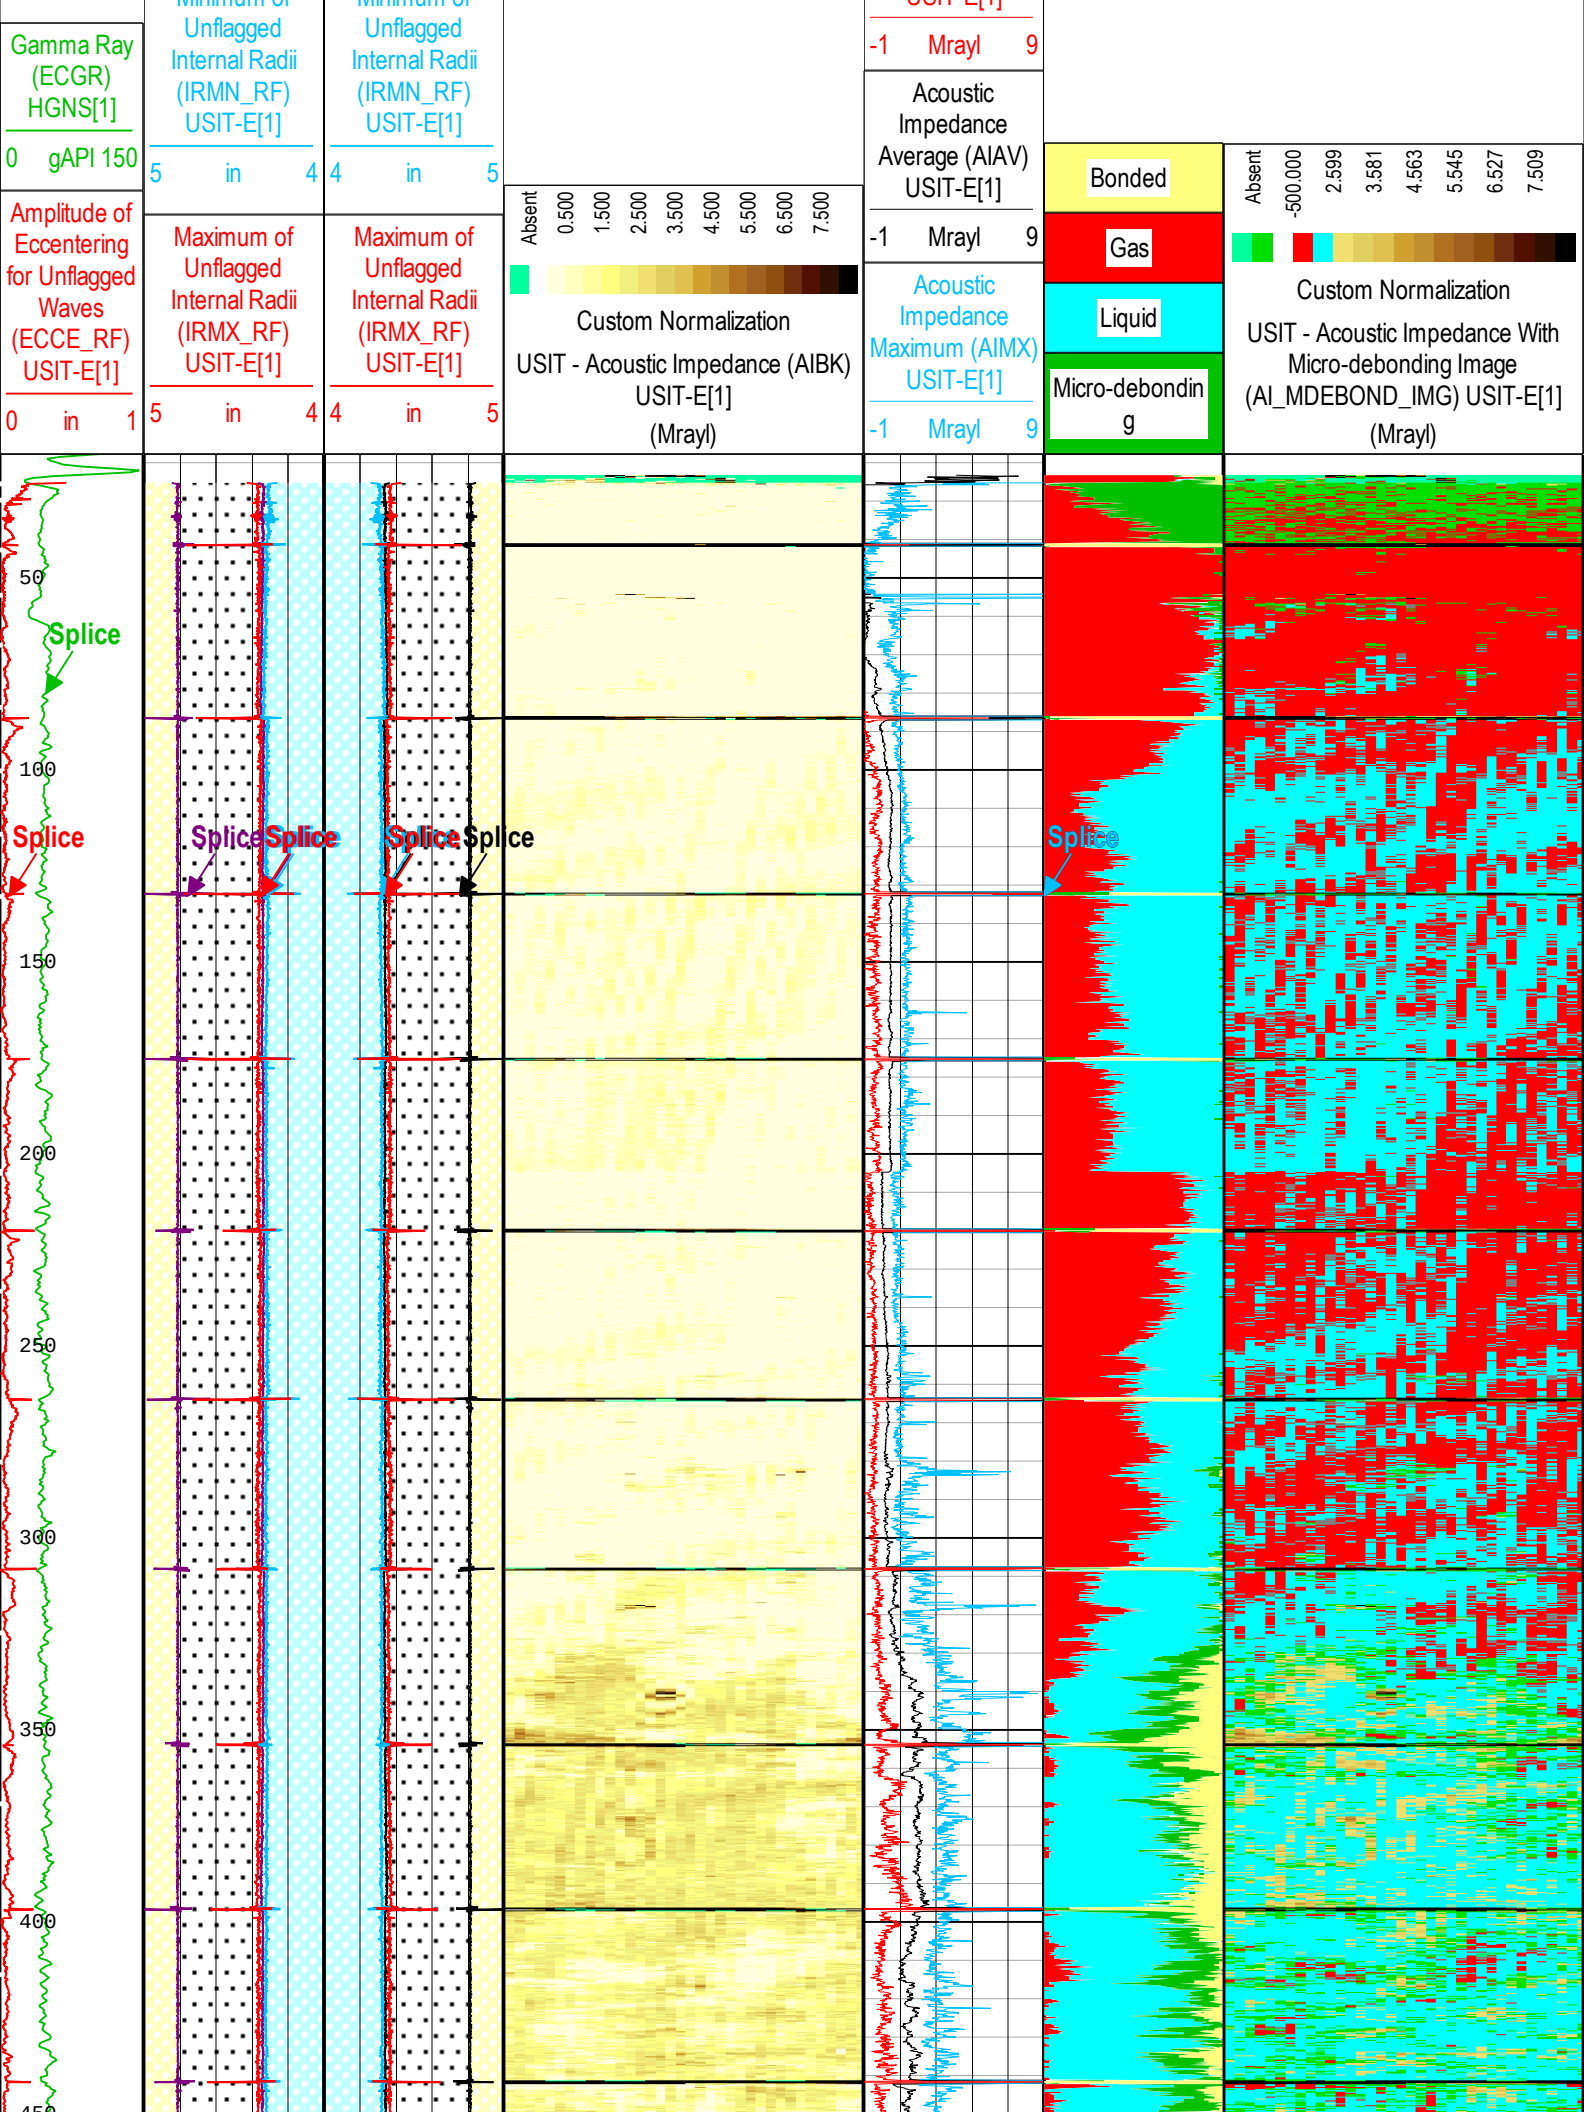
Gamma Ray (ECGR) HGNS[1]
0 gAPI 150
Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E[1]
0 in 1
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
5 in 4
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
5 in 4
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
4 in 5
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
4 in 5
Absent 0.500 1.500 2.500 3.500 4.500 5.500 6.500 7.500
Custom Normalization
USIT - Acoustic Impedance (AIBK) USIT-E[1] (Mrayl)
-1 Mrayl 9
Acoustic Impedance Average (AIAV) USIT-E[1]
-1 Mrayl 9
Acoustic Impedance Maximum (AIMX) USIT-E[1]
-1 Mrayl 9
Bonded
Gas
Liquid
Micro-debonding
Absent -500.000 2.599 3.581 4.563 5.545 6.527 7.509
Custom Normalization
USIT - Acoustic Impedance With Micro-debonding Image (AI_MDEBOND_IMG) USIT-E[1] (Mrayl)
Splice
50
100
150
200
250
300
350
400
450

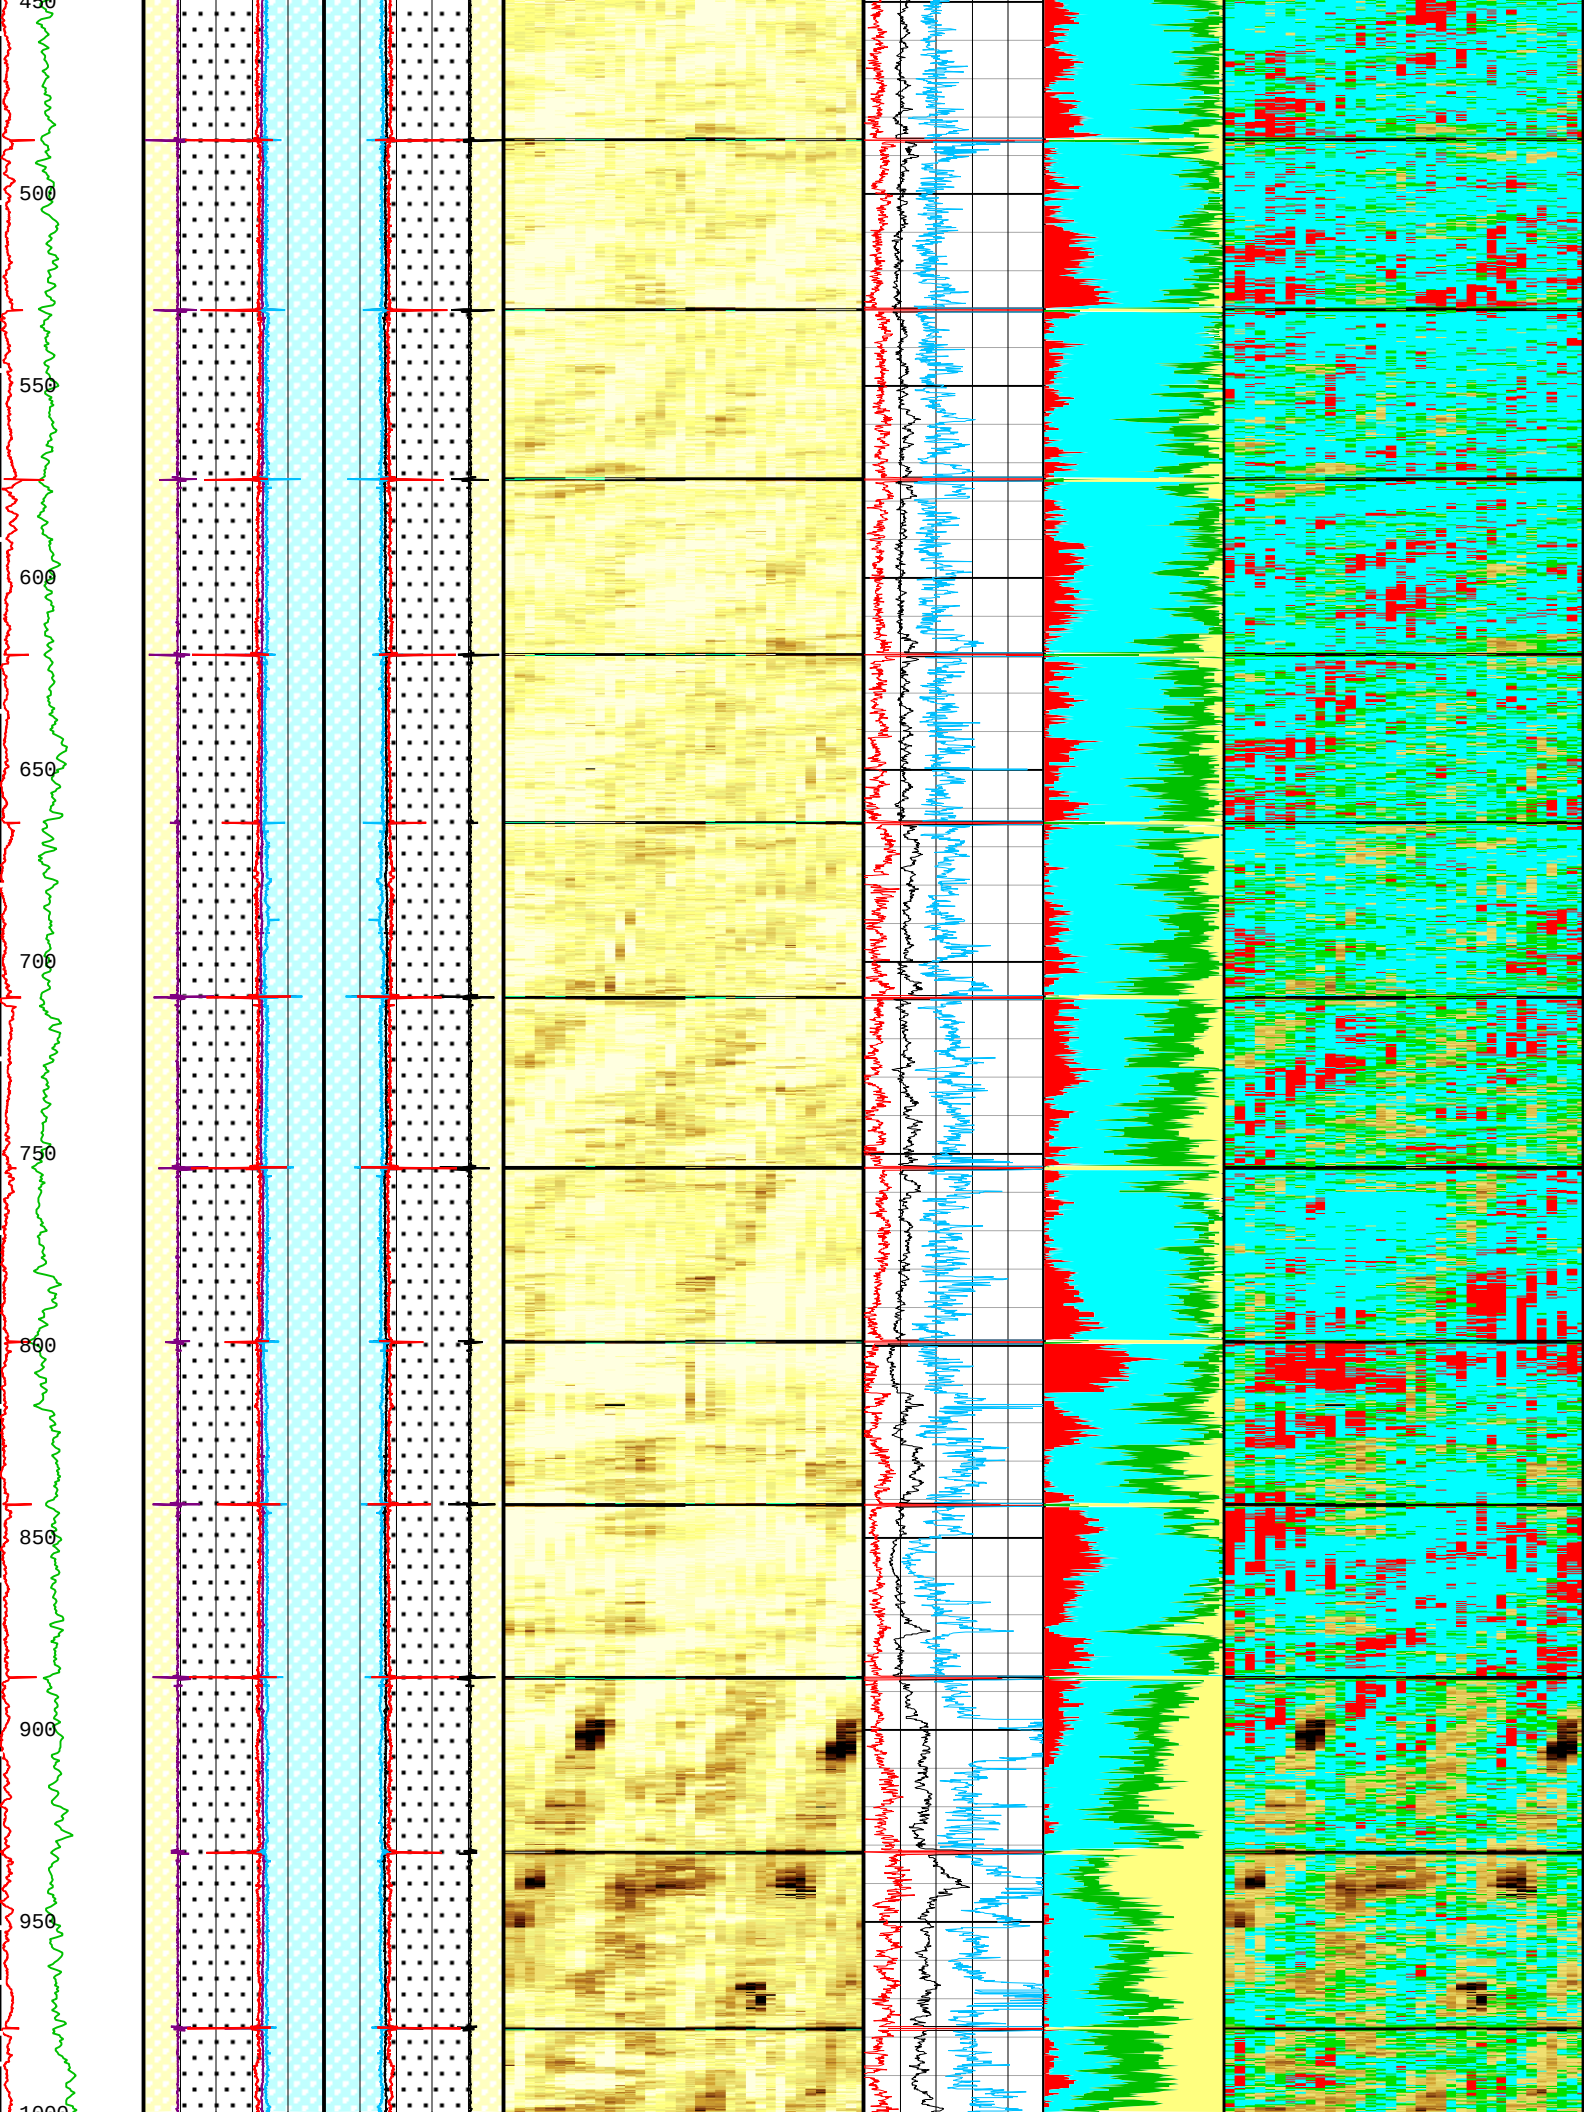
450
500
550
600
650
700
750
800
850
900
950
1000

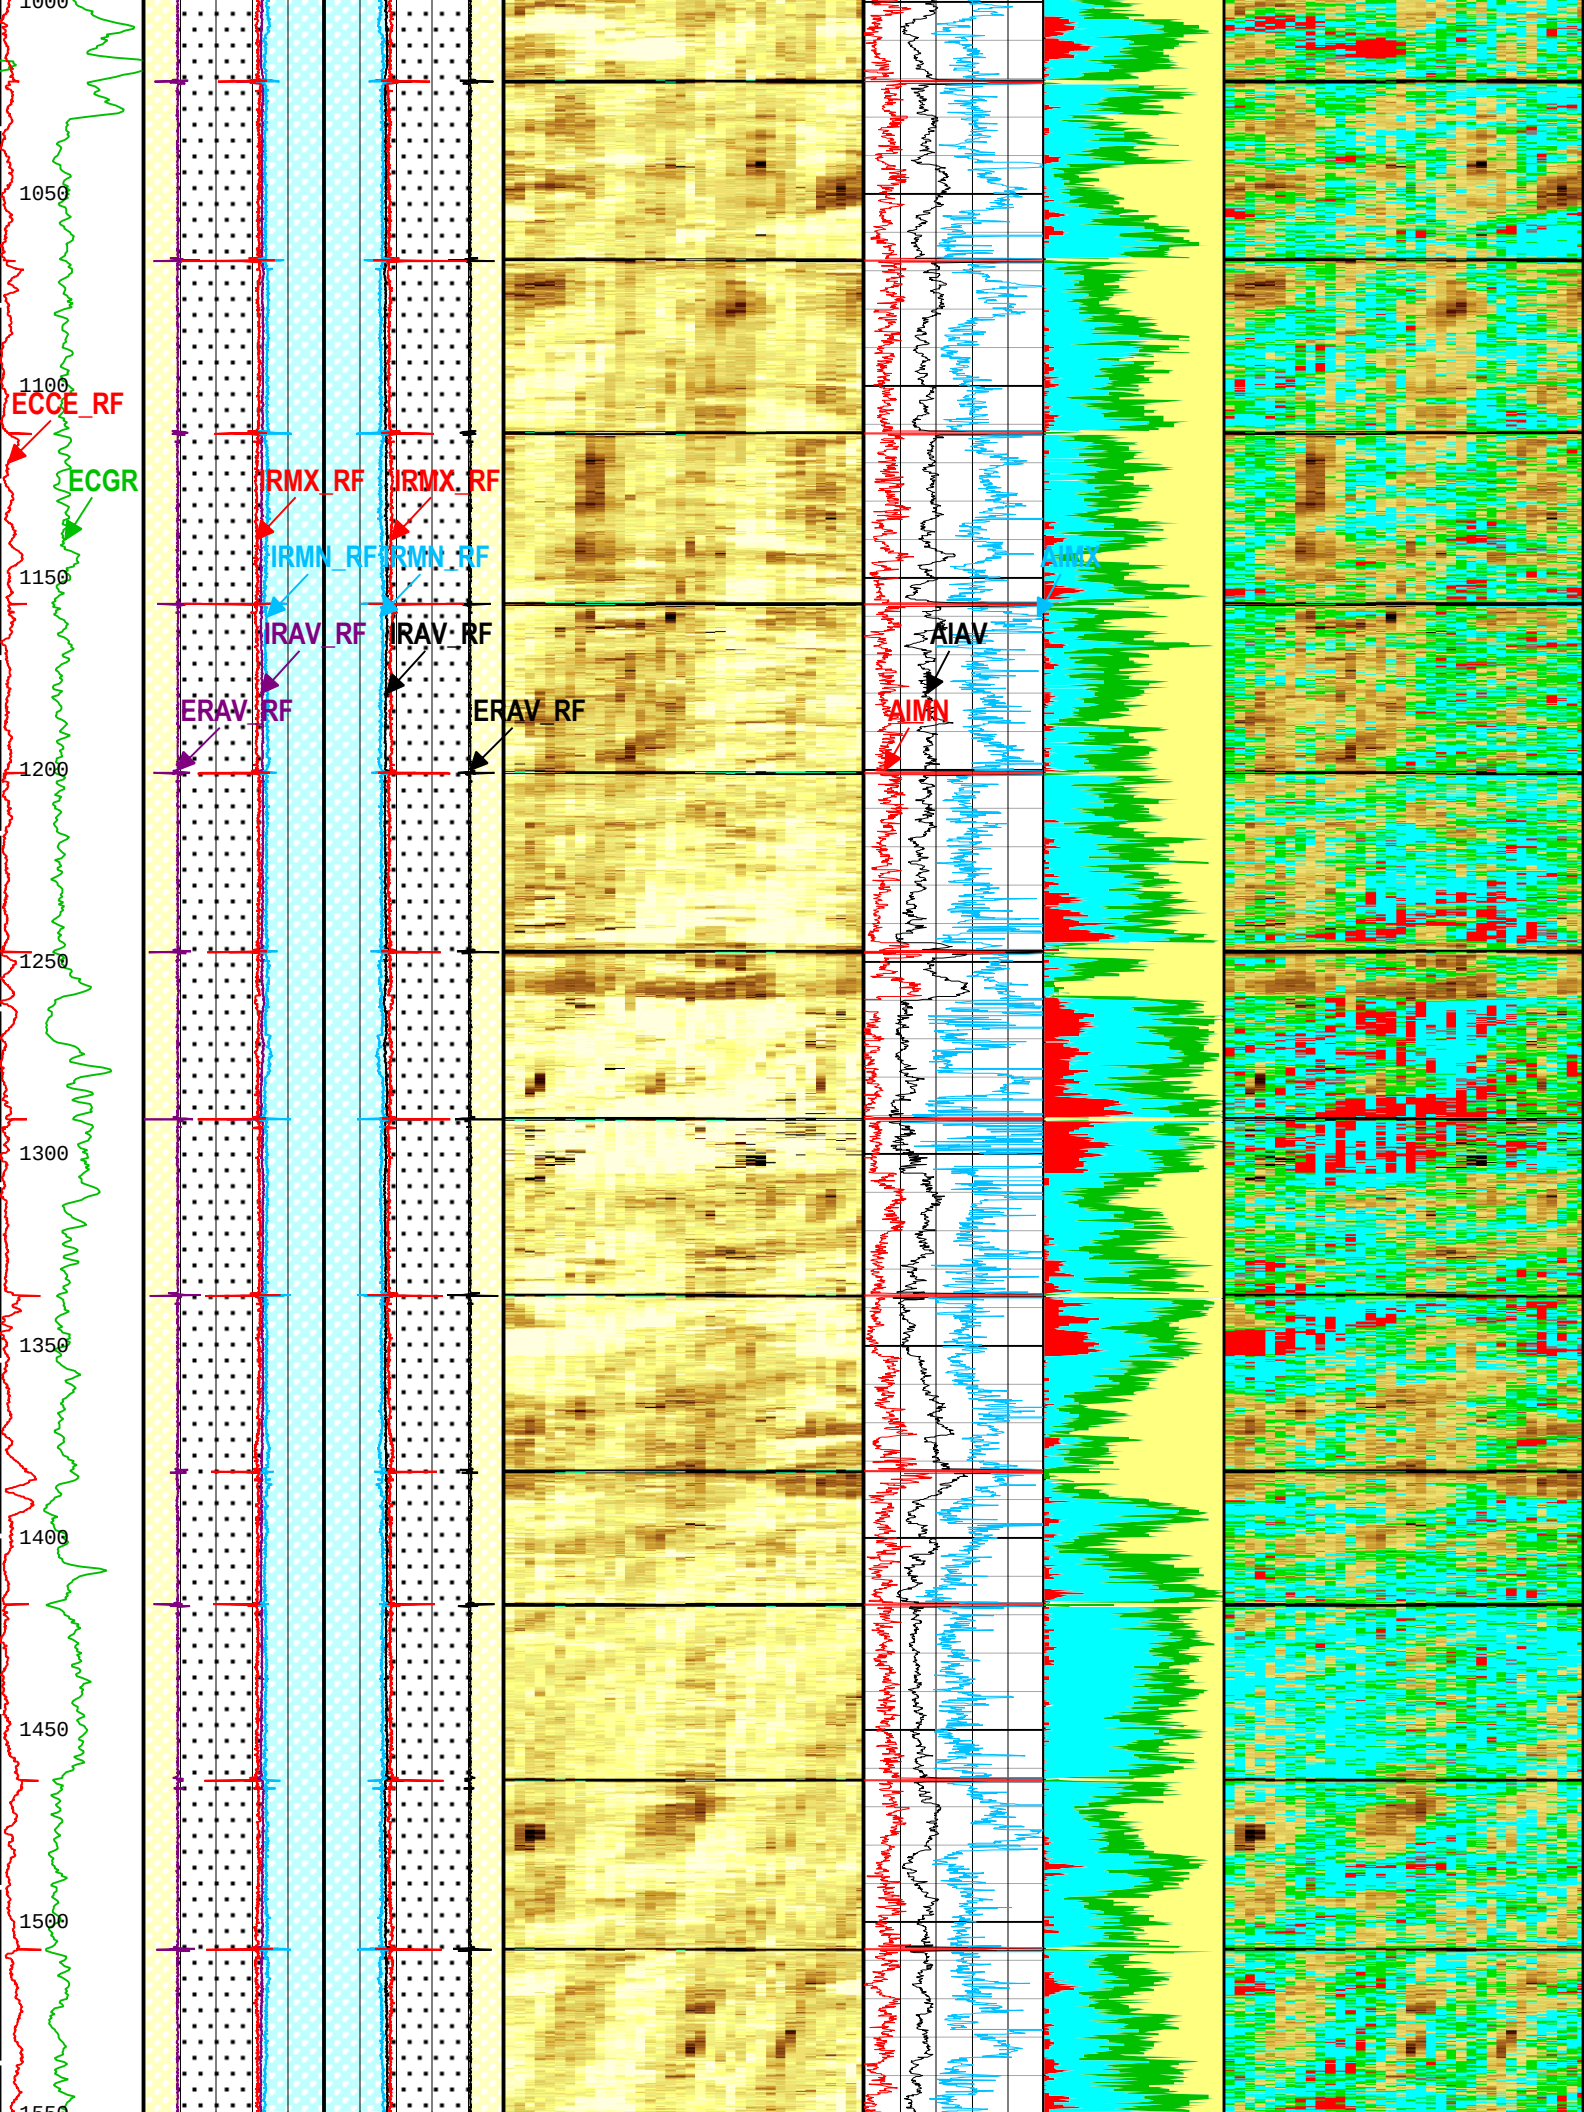
1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500
1550
ECCE_RF
ECGR
IRMX_RF
IRMX_RF
IRMN_RF
IRMN_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
AIAV
AIMN

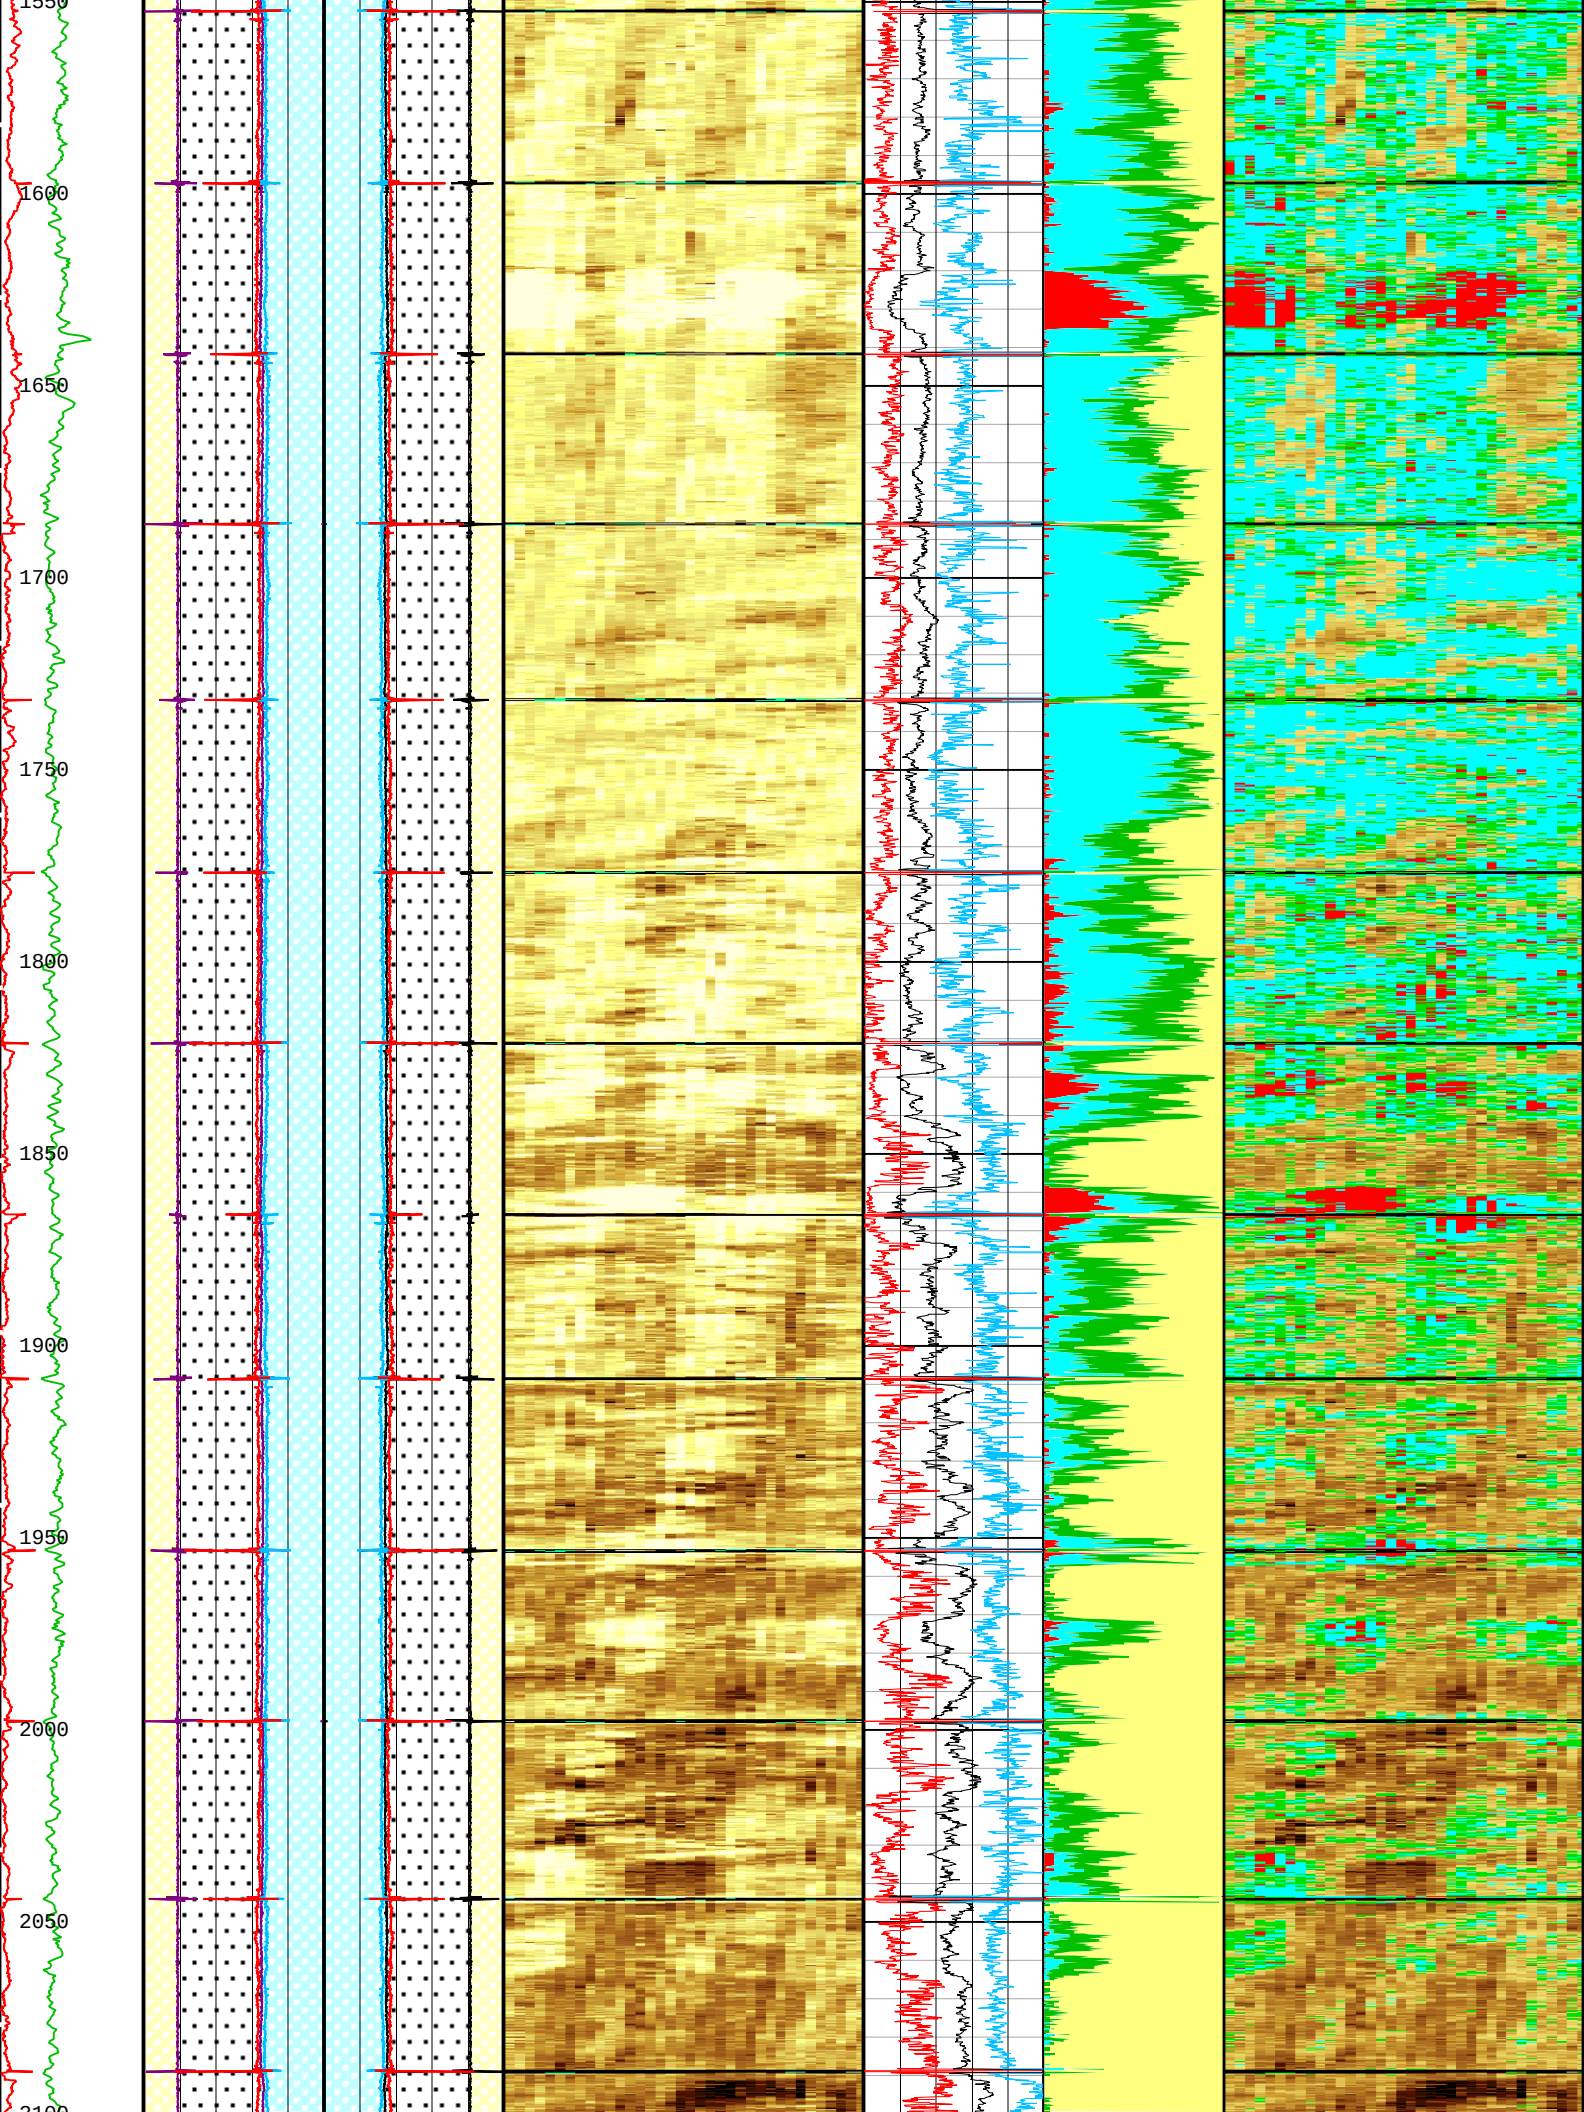
1550
1600
1650
1700
1750
1800
1850
1900
1950
2000
2050
2100

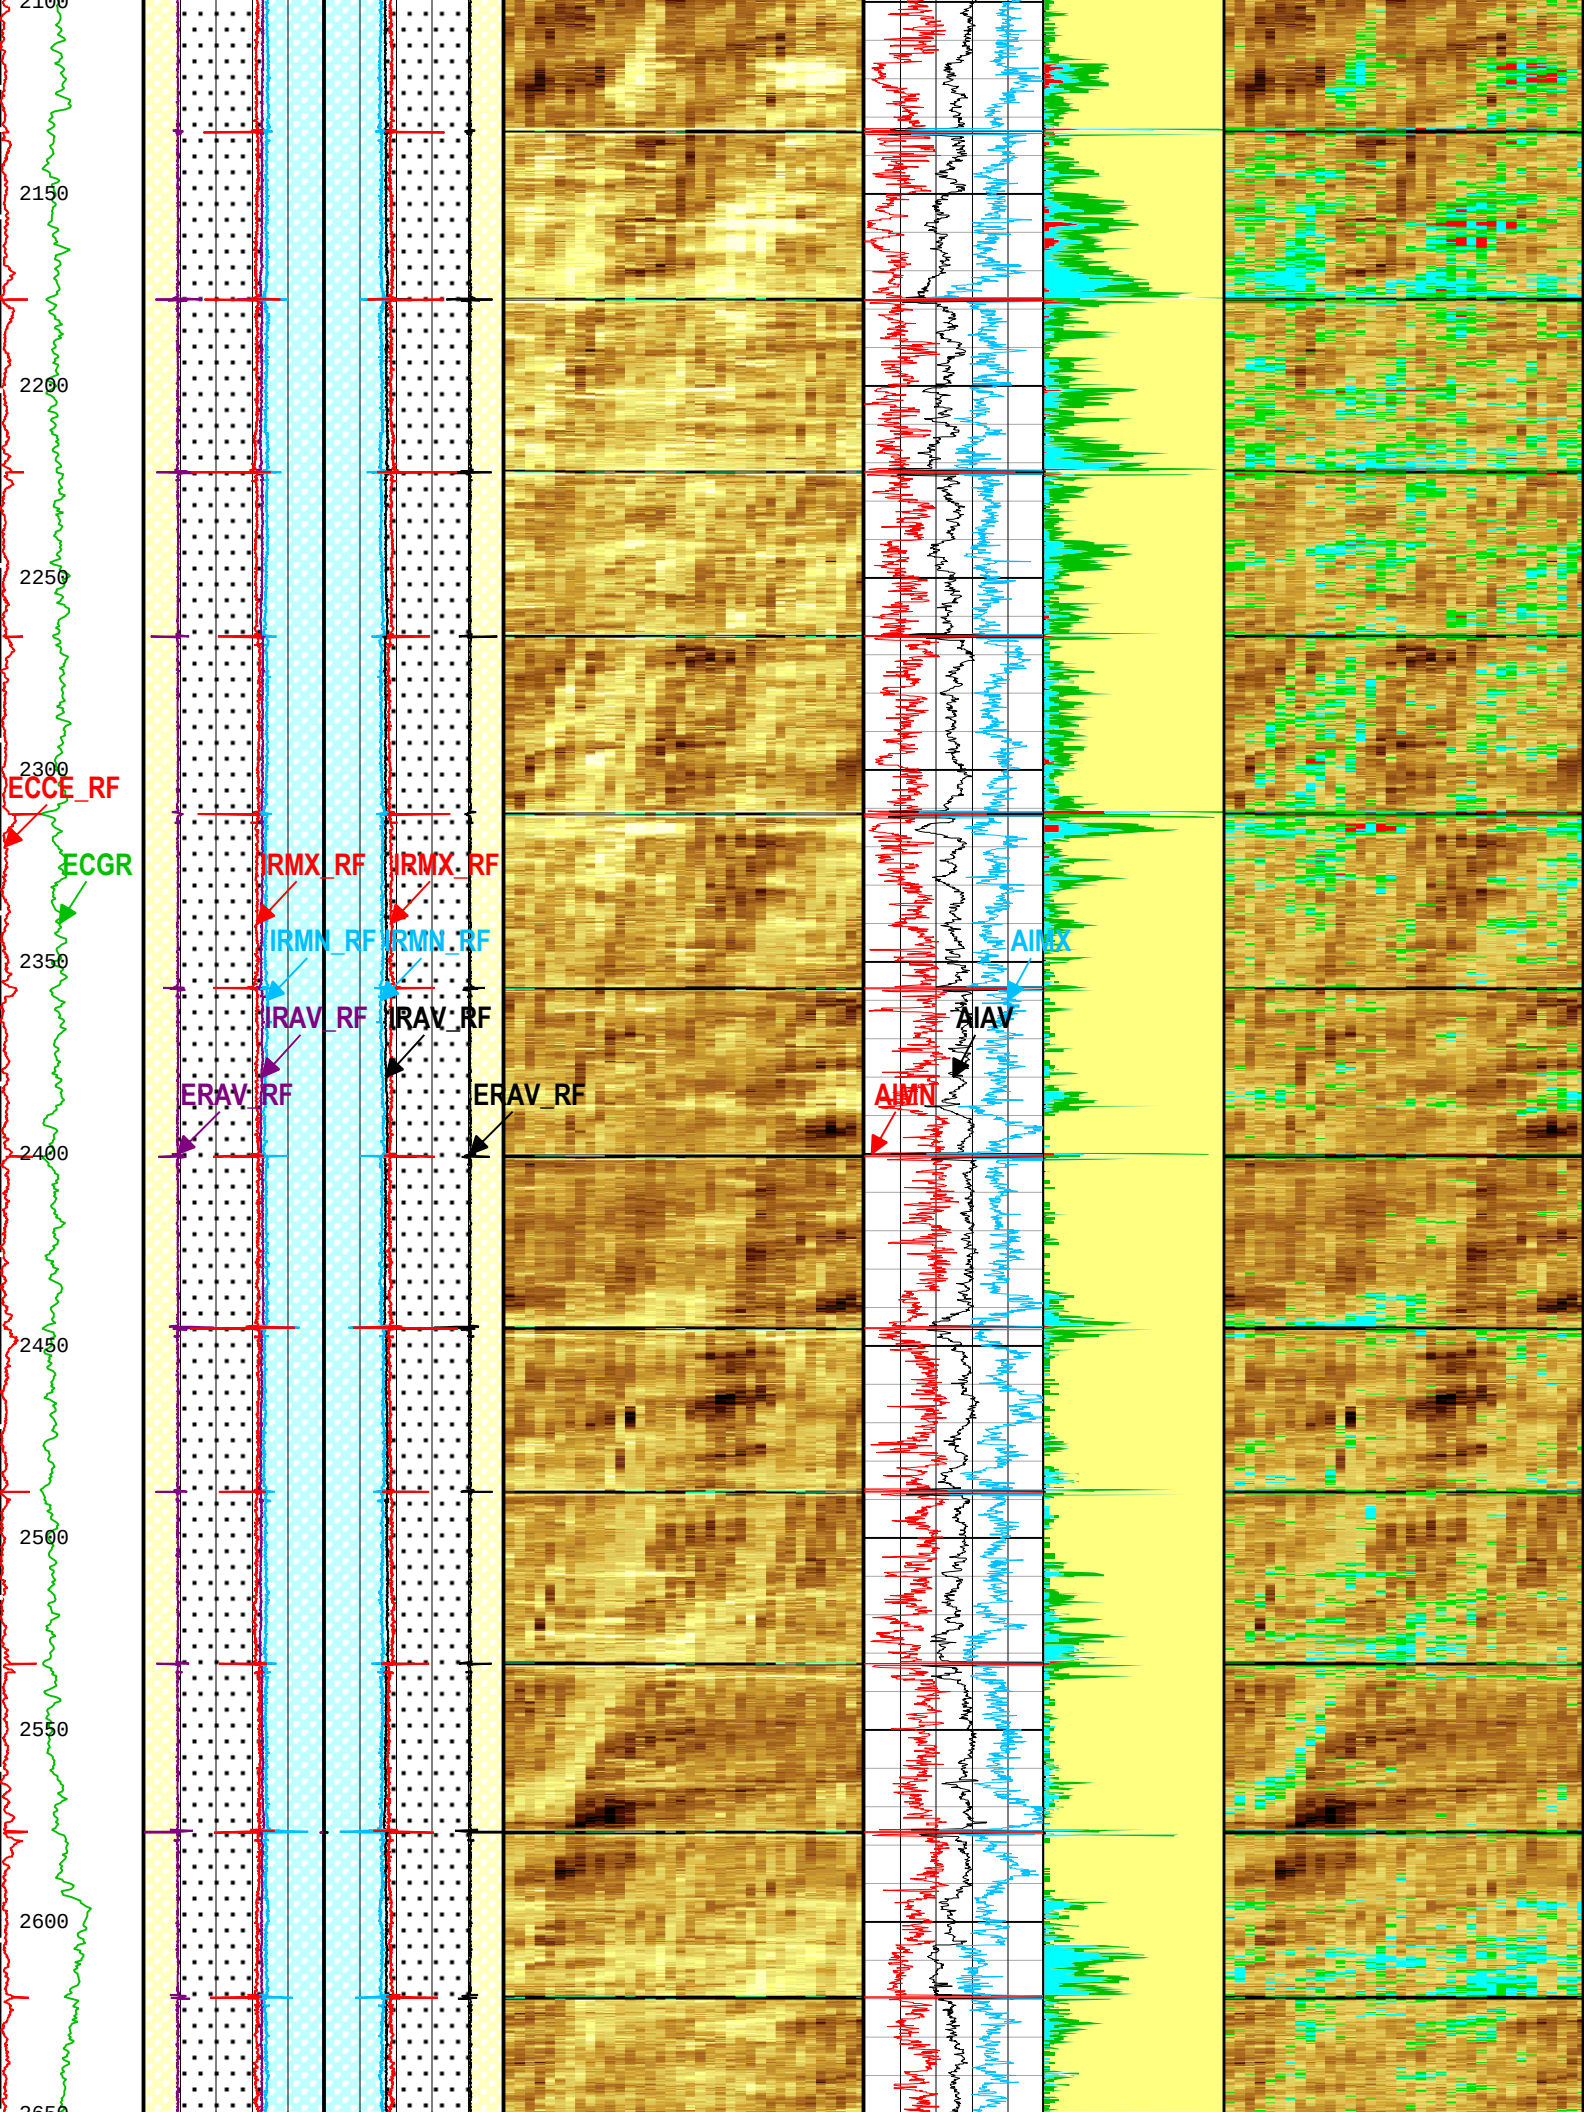
2100
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600
2650
ECCE_RF
ECGR
IRMX_RF
IRMX_RF
IRMN_RF
IRMN_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN

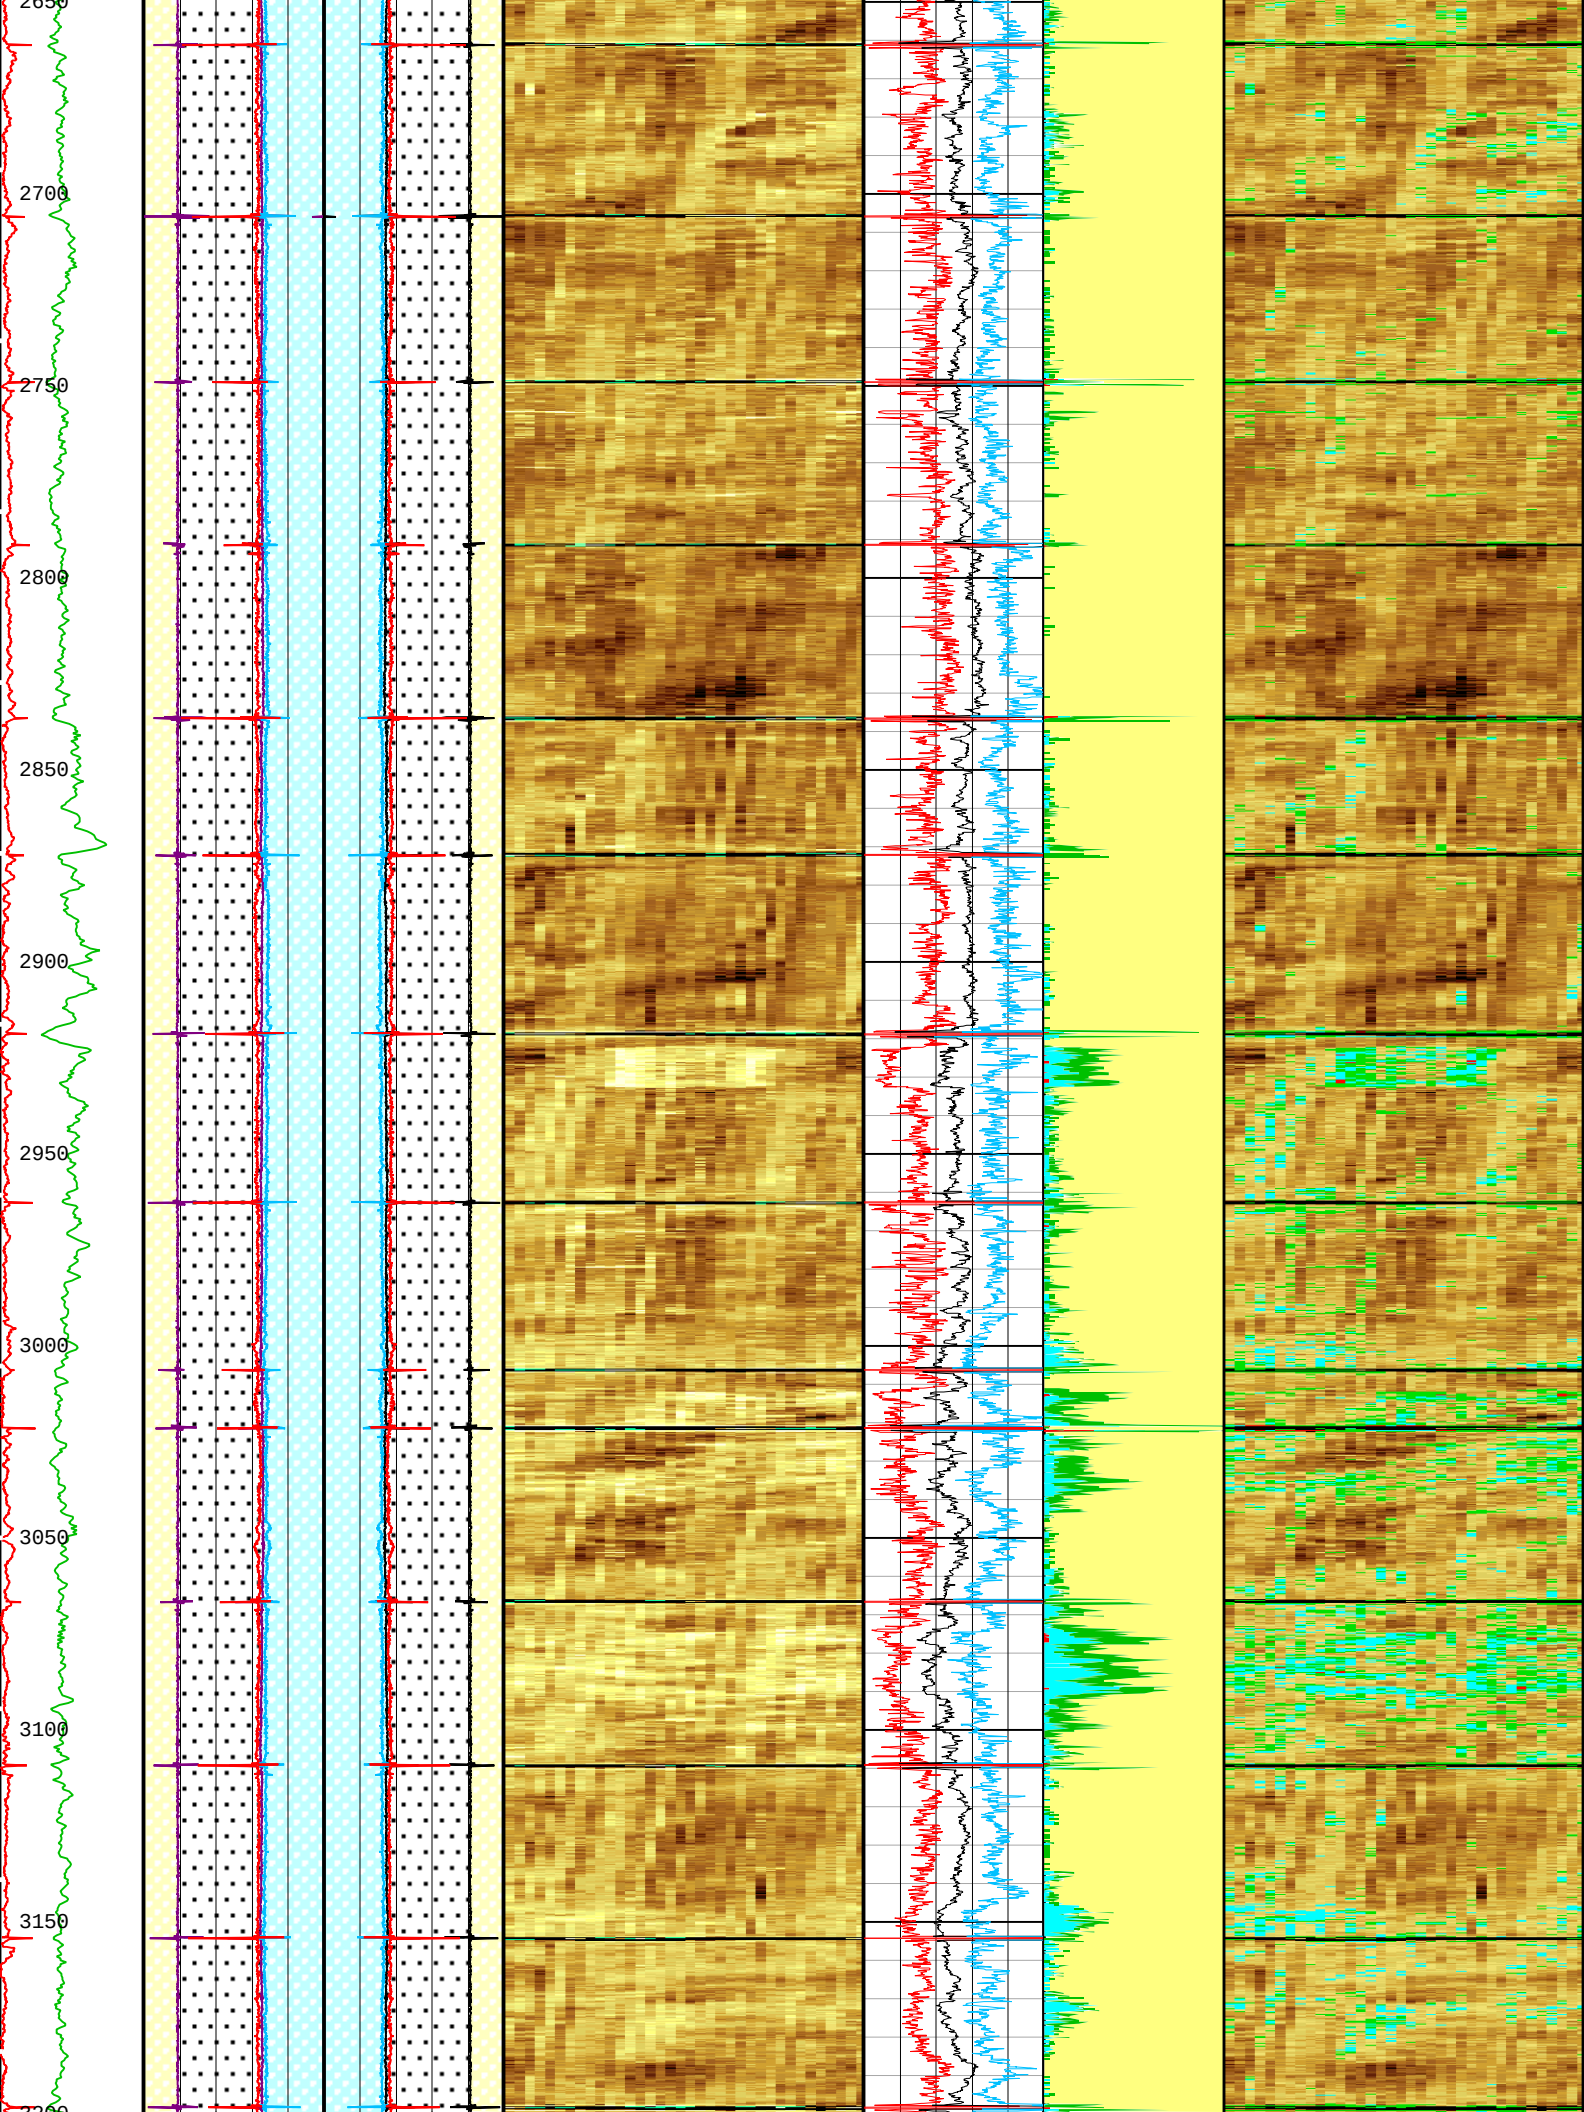
2650
2700
2750
2800
2850
2900
2950
3000
3050
3100
3150

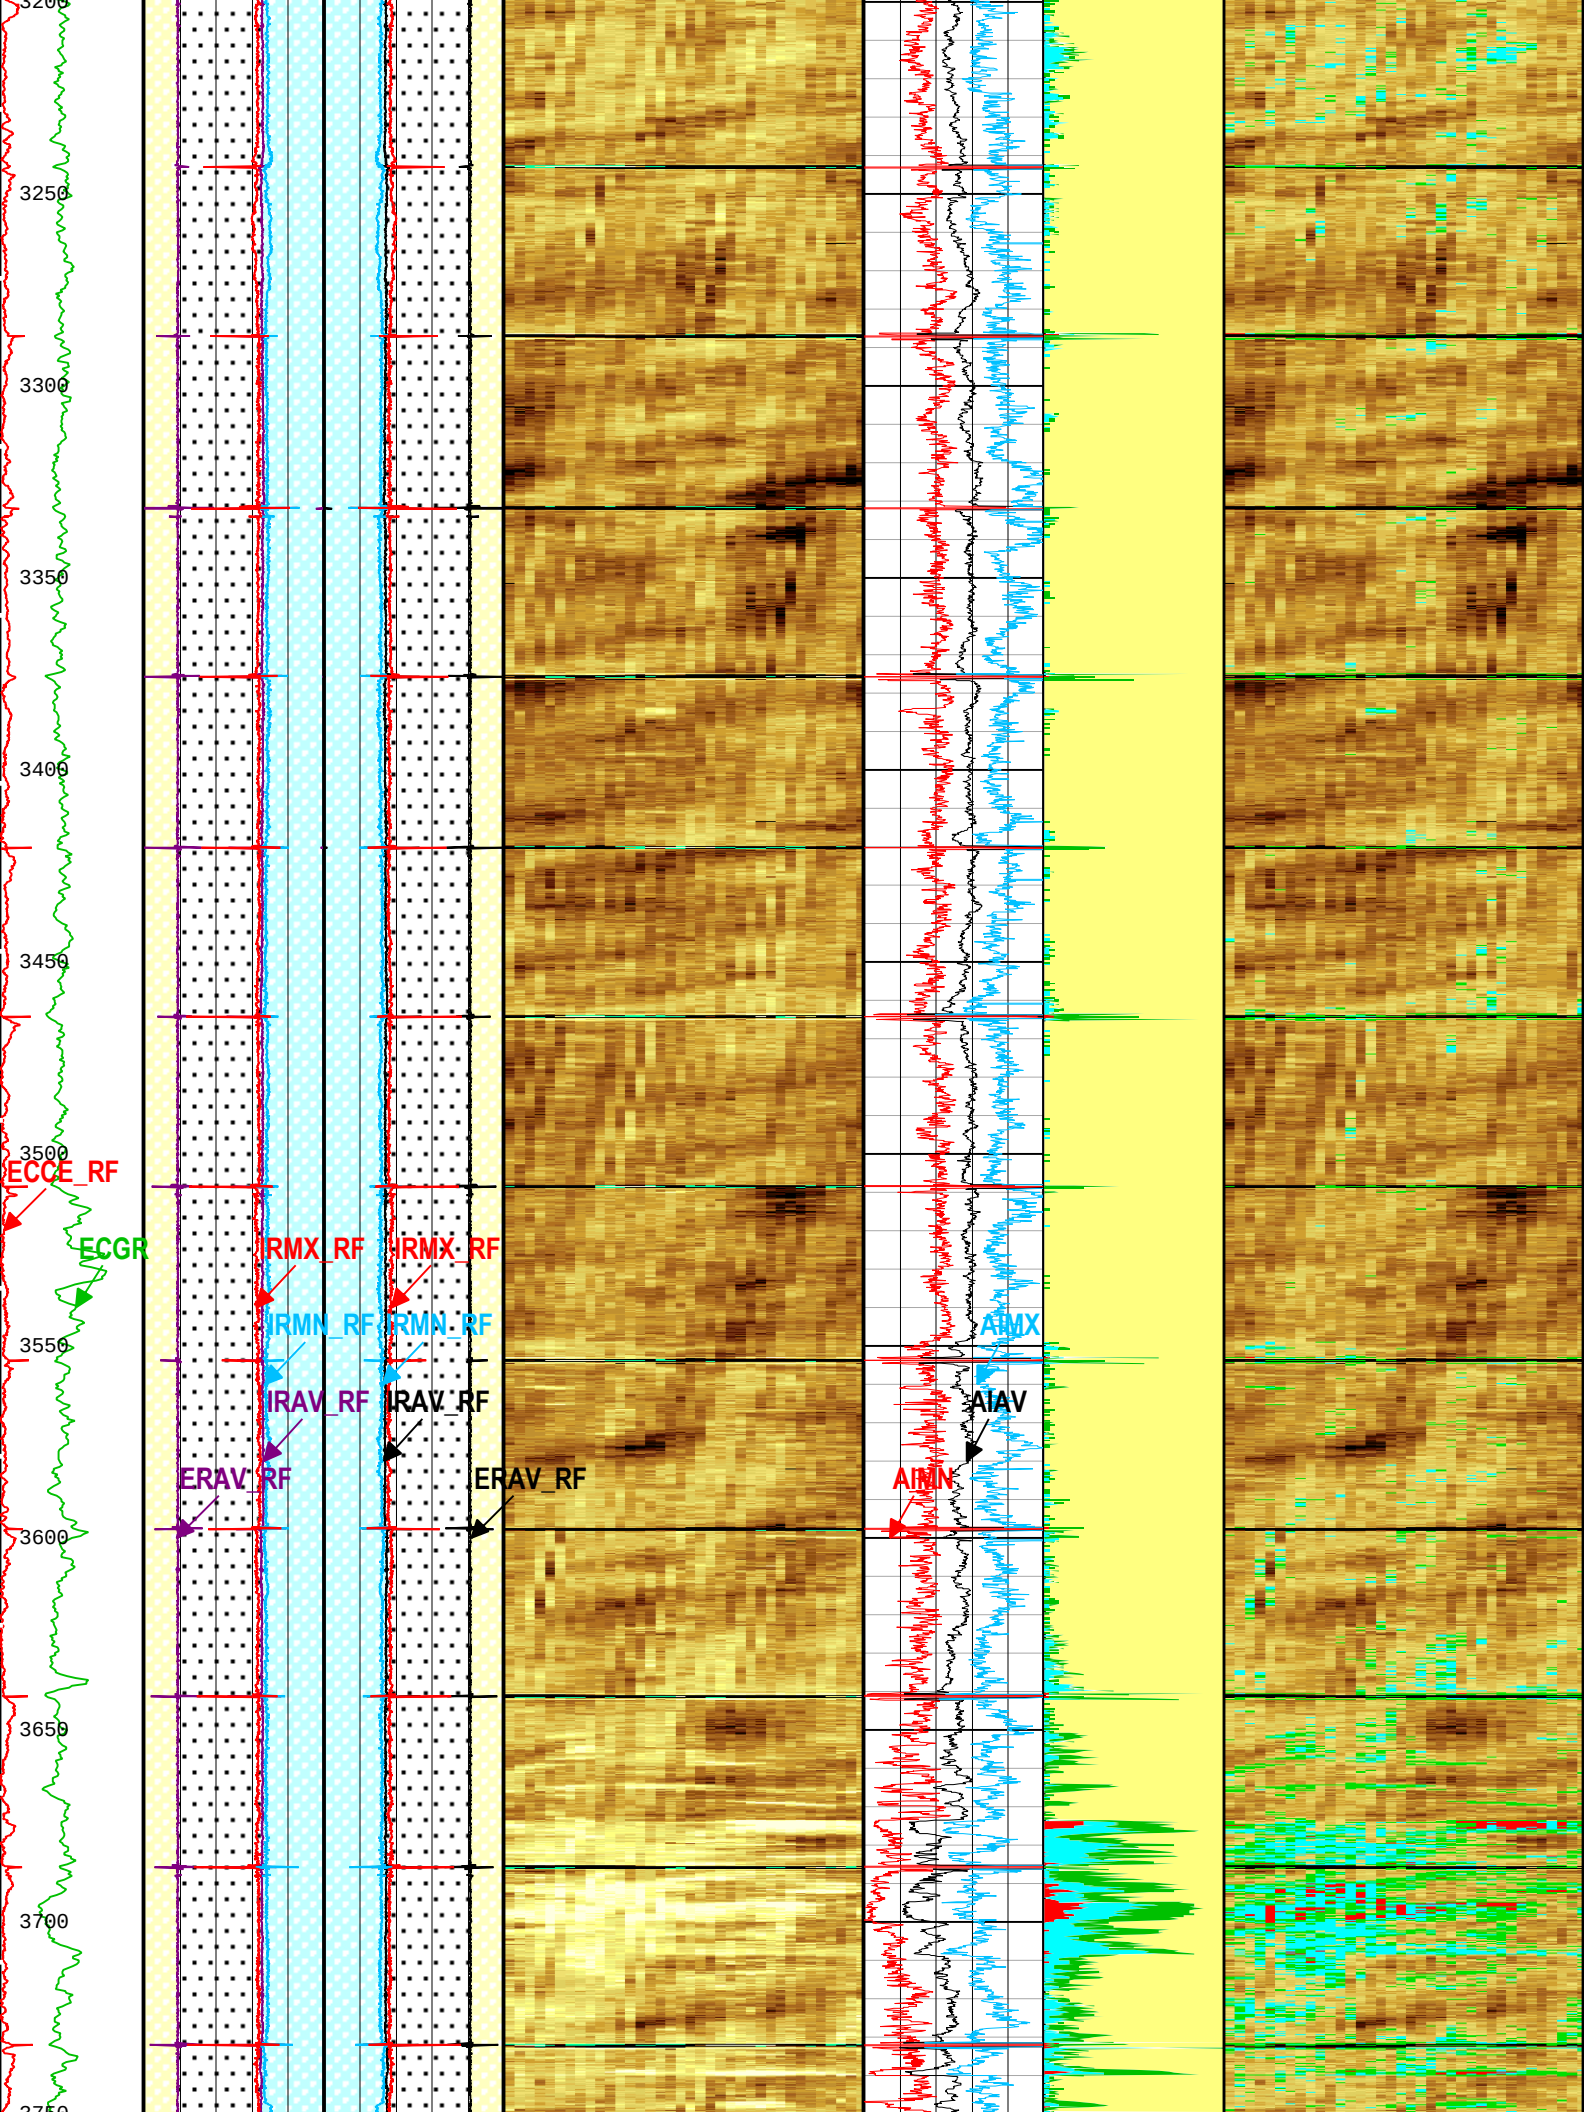
3200
3250
3300
3350
3400
3450
3500
3550
3600
3650
3700
3750
ECCE_RF
ECGR
IRMX_RF
IRMX_RF
IRMN_RF
IRMN_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
AIMX
AIAV
AIMN

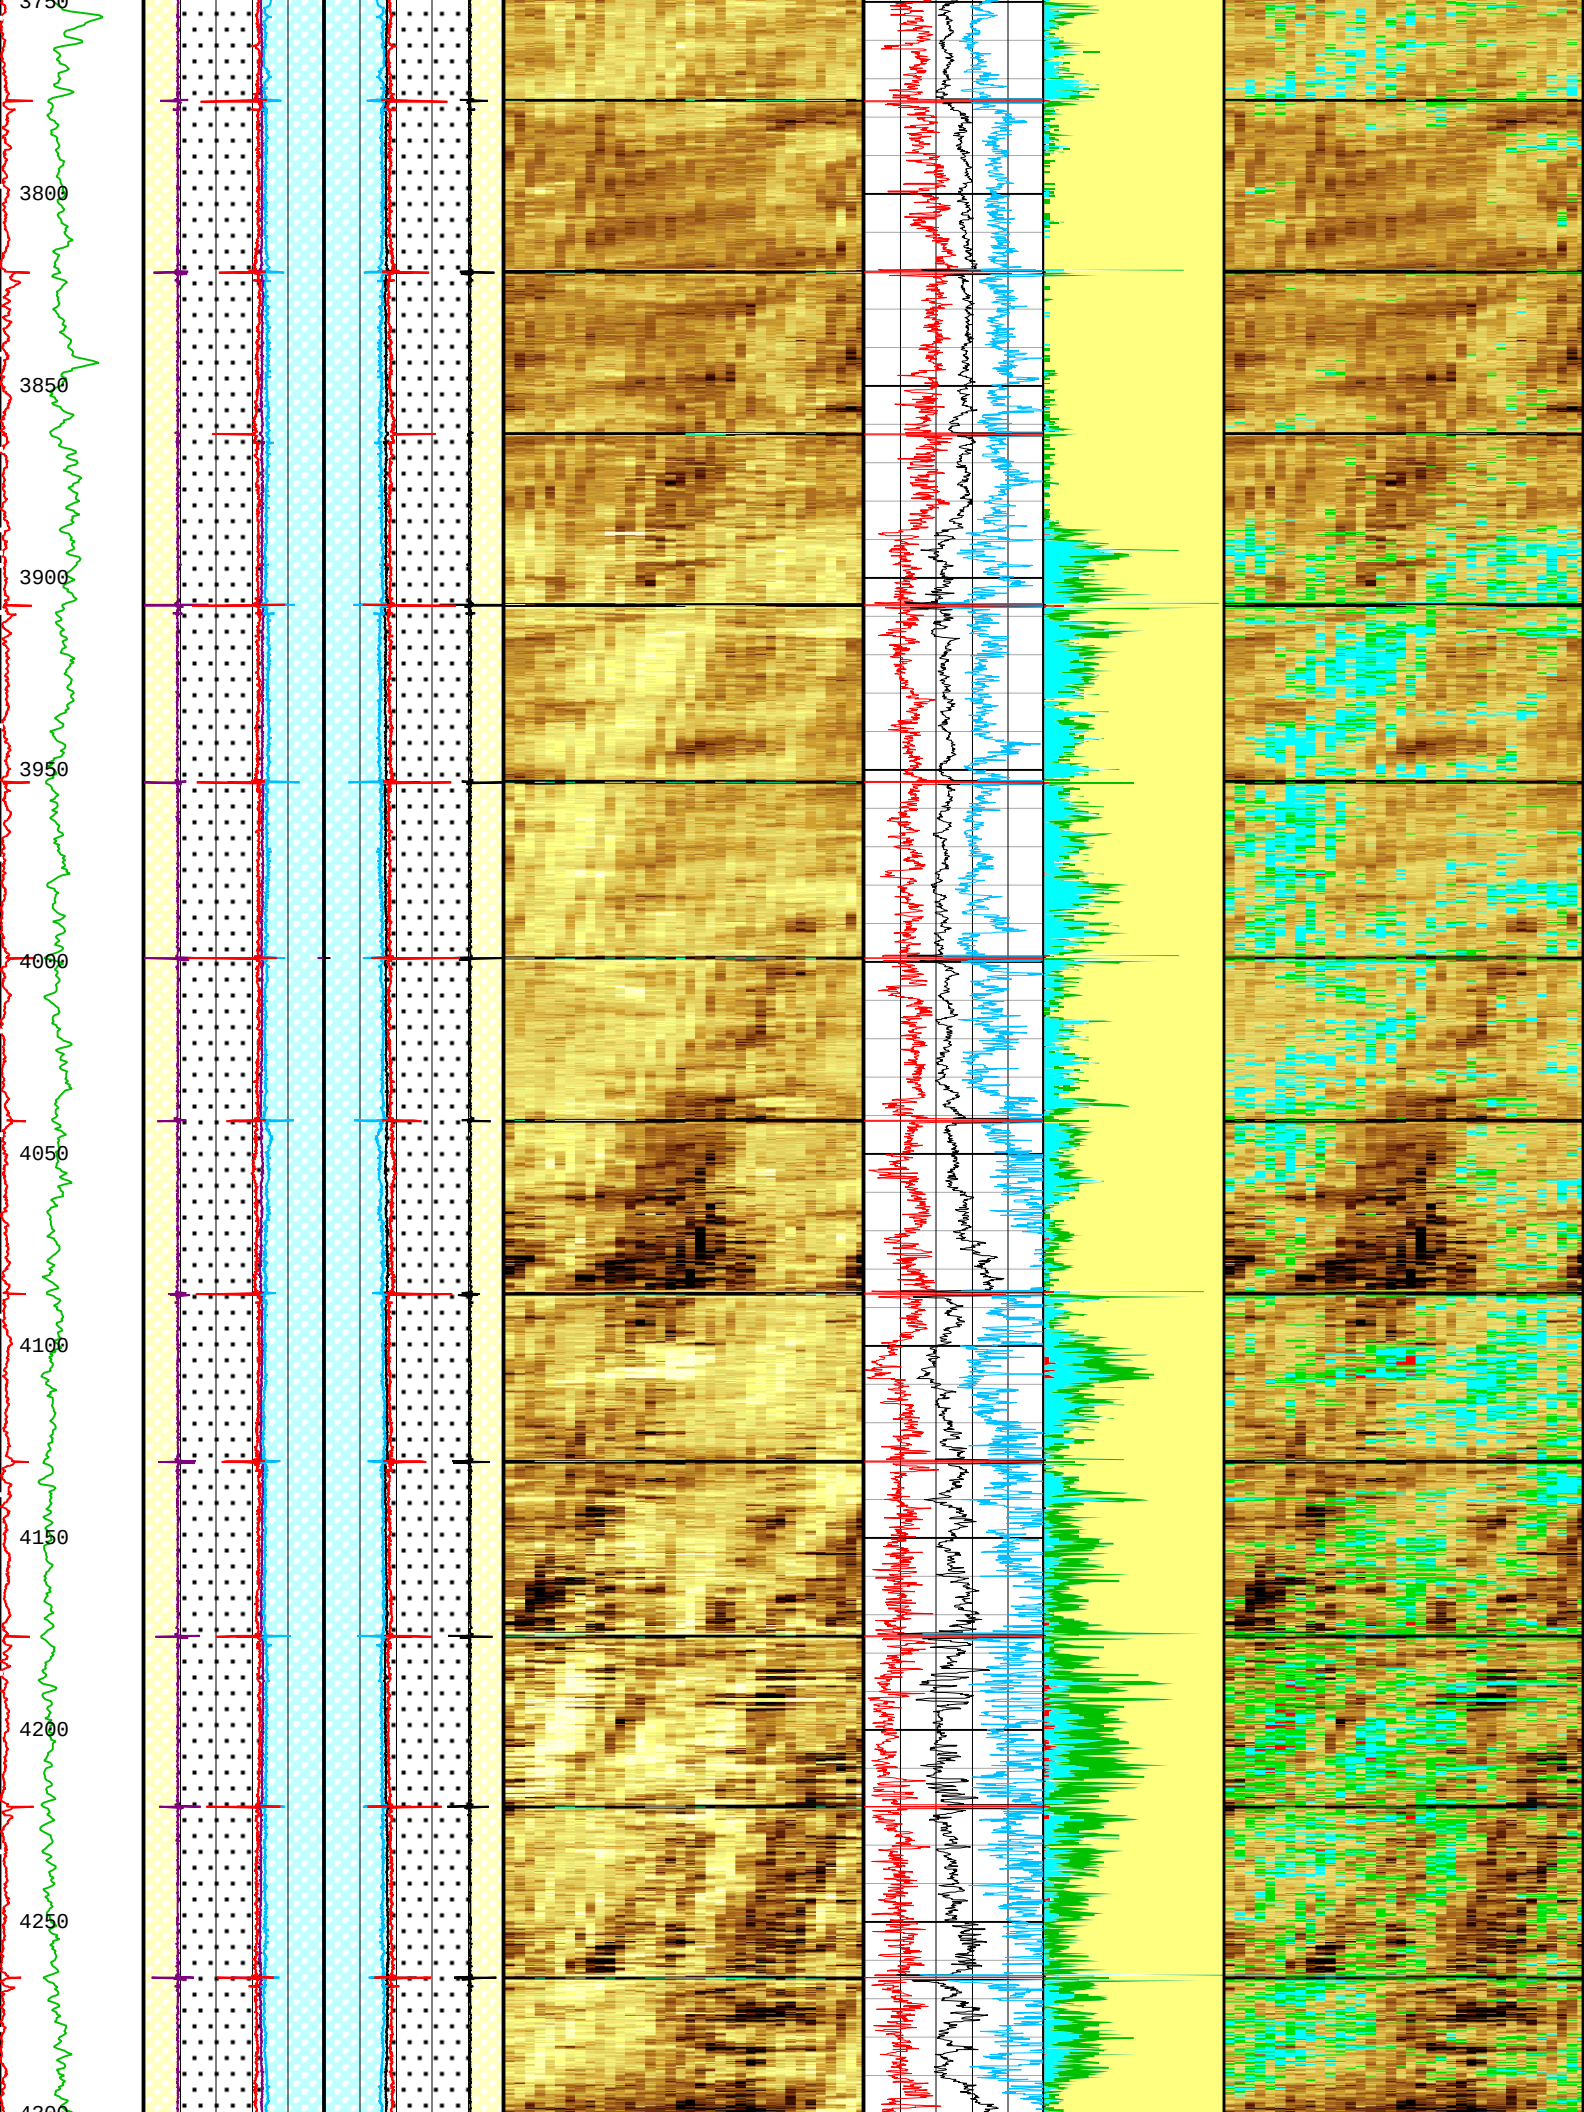
3750
3800
3850
3900
3950
4000
4050
4100
4150
4200
4250

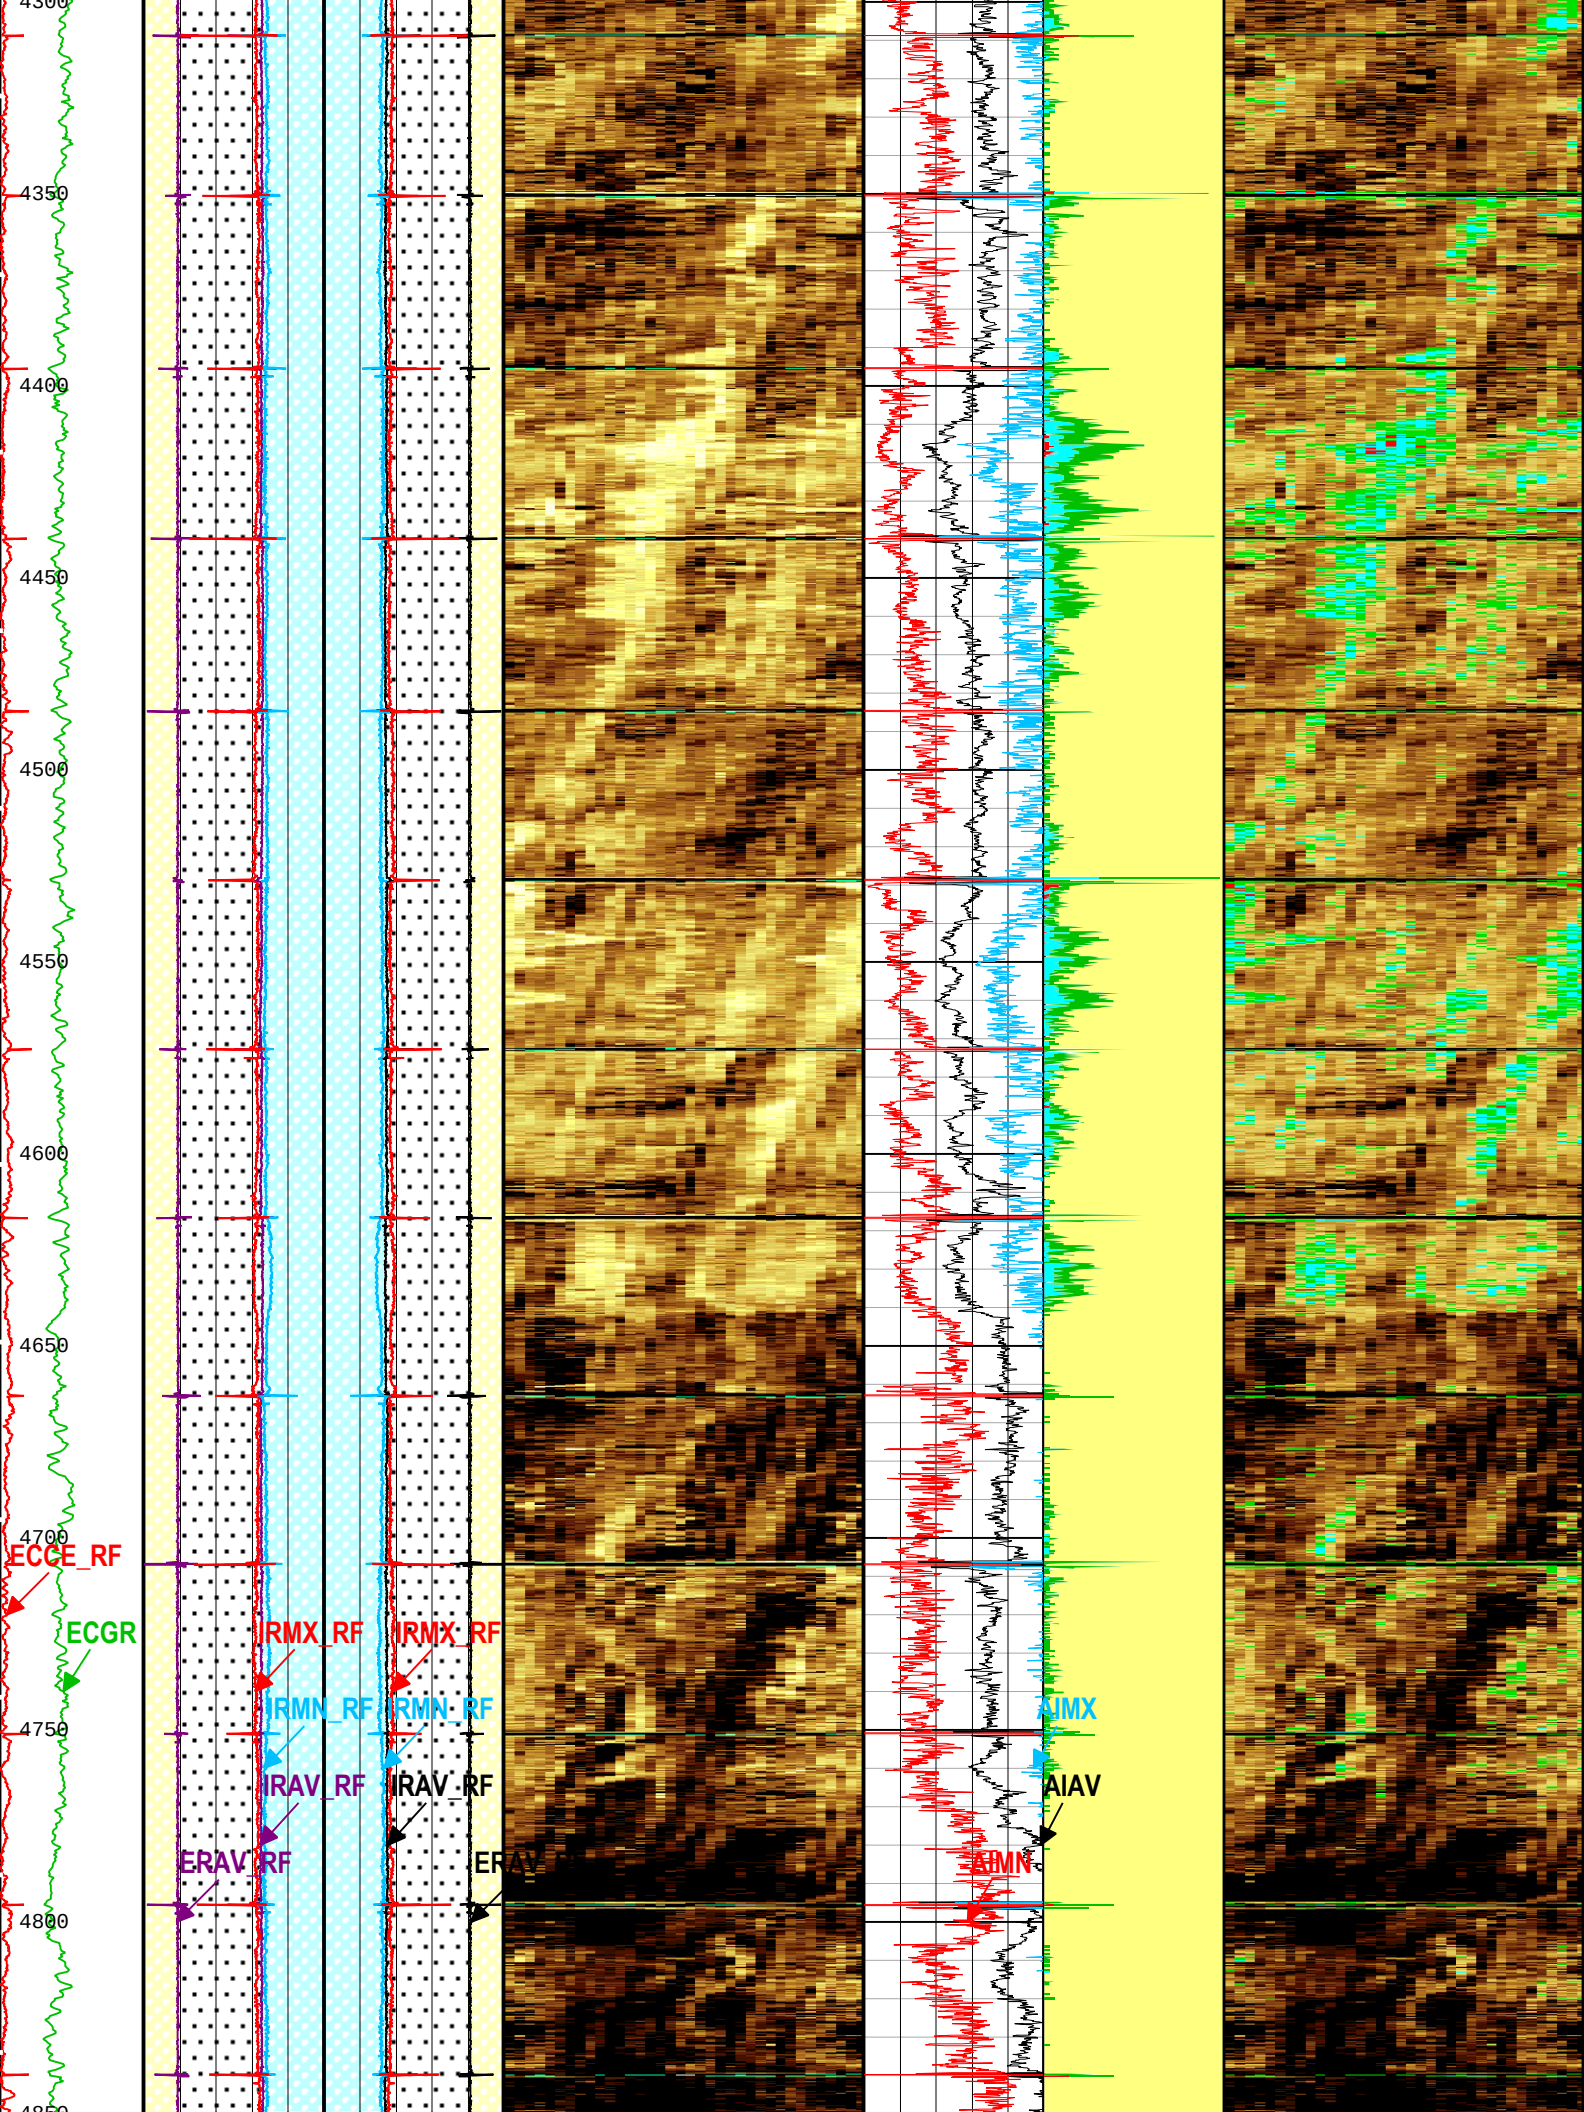
4300
4350
4400
4450
4500
4550
4600
4650
4700
4750
4800
4850
ECCE_RF
ECGR
IRMX_RF
IRMX_RF
IRMN_RF
IRMN_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV
AIMX
AIAV
AIMN

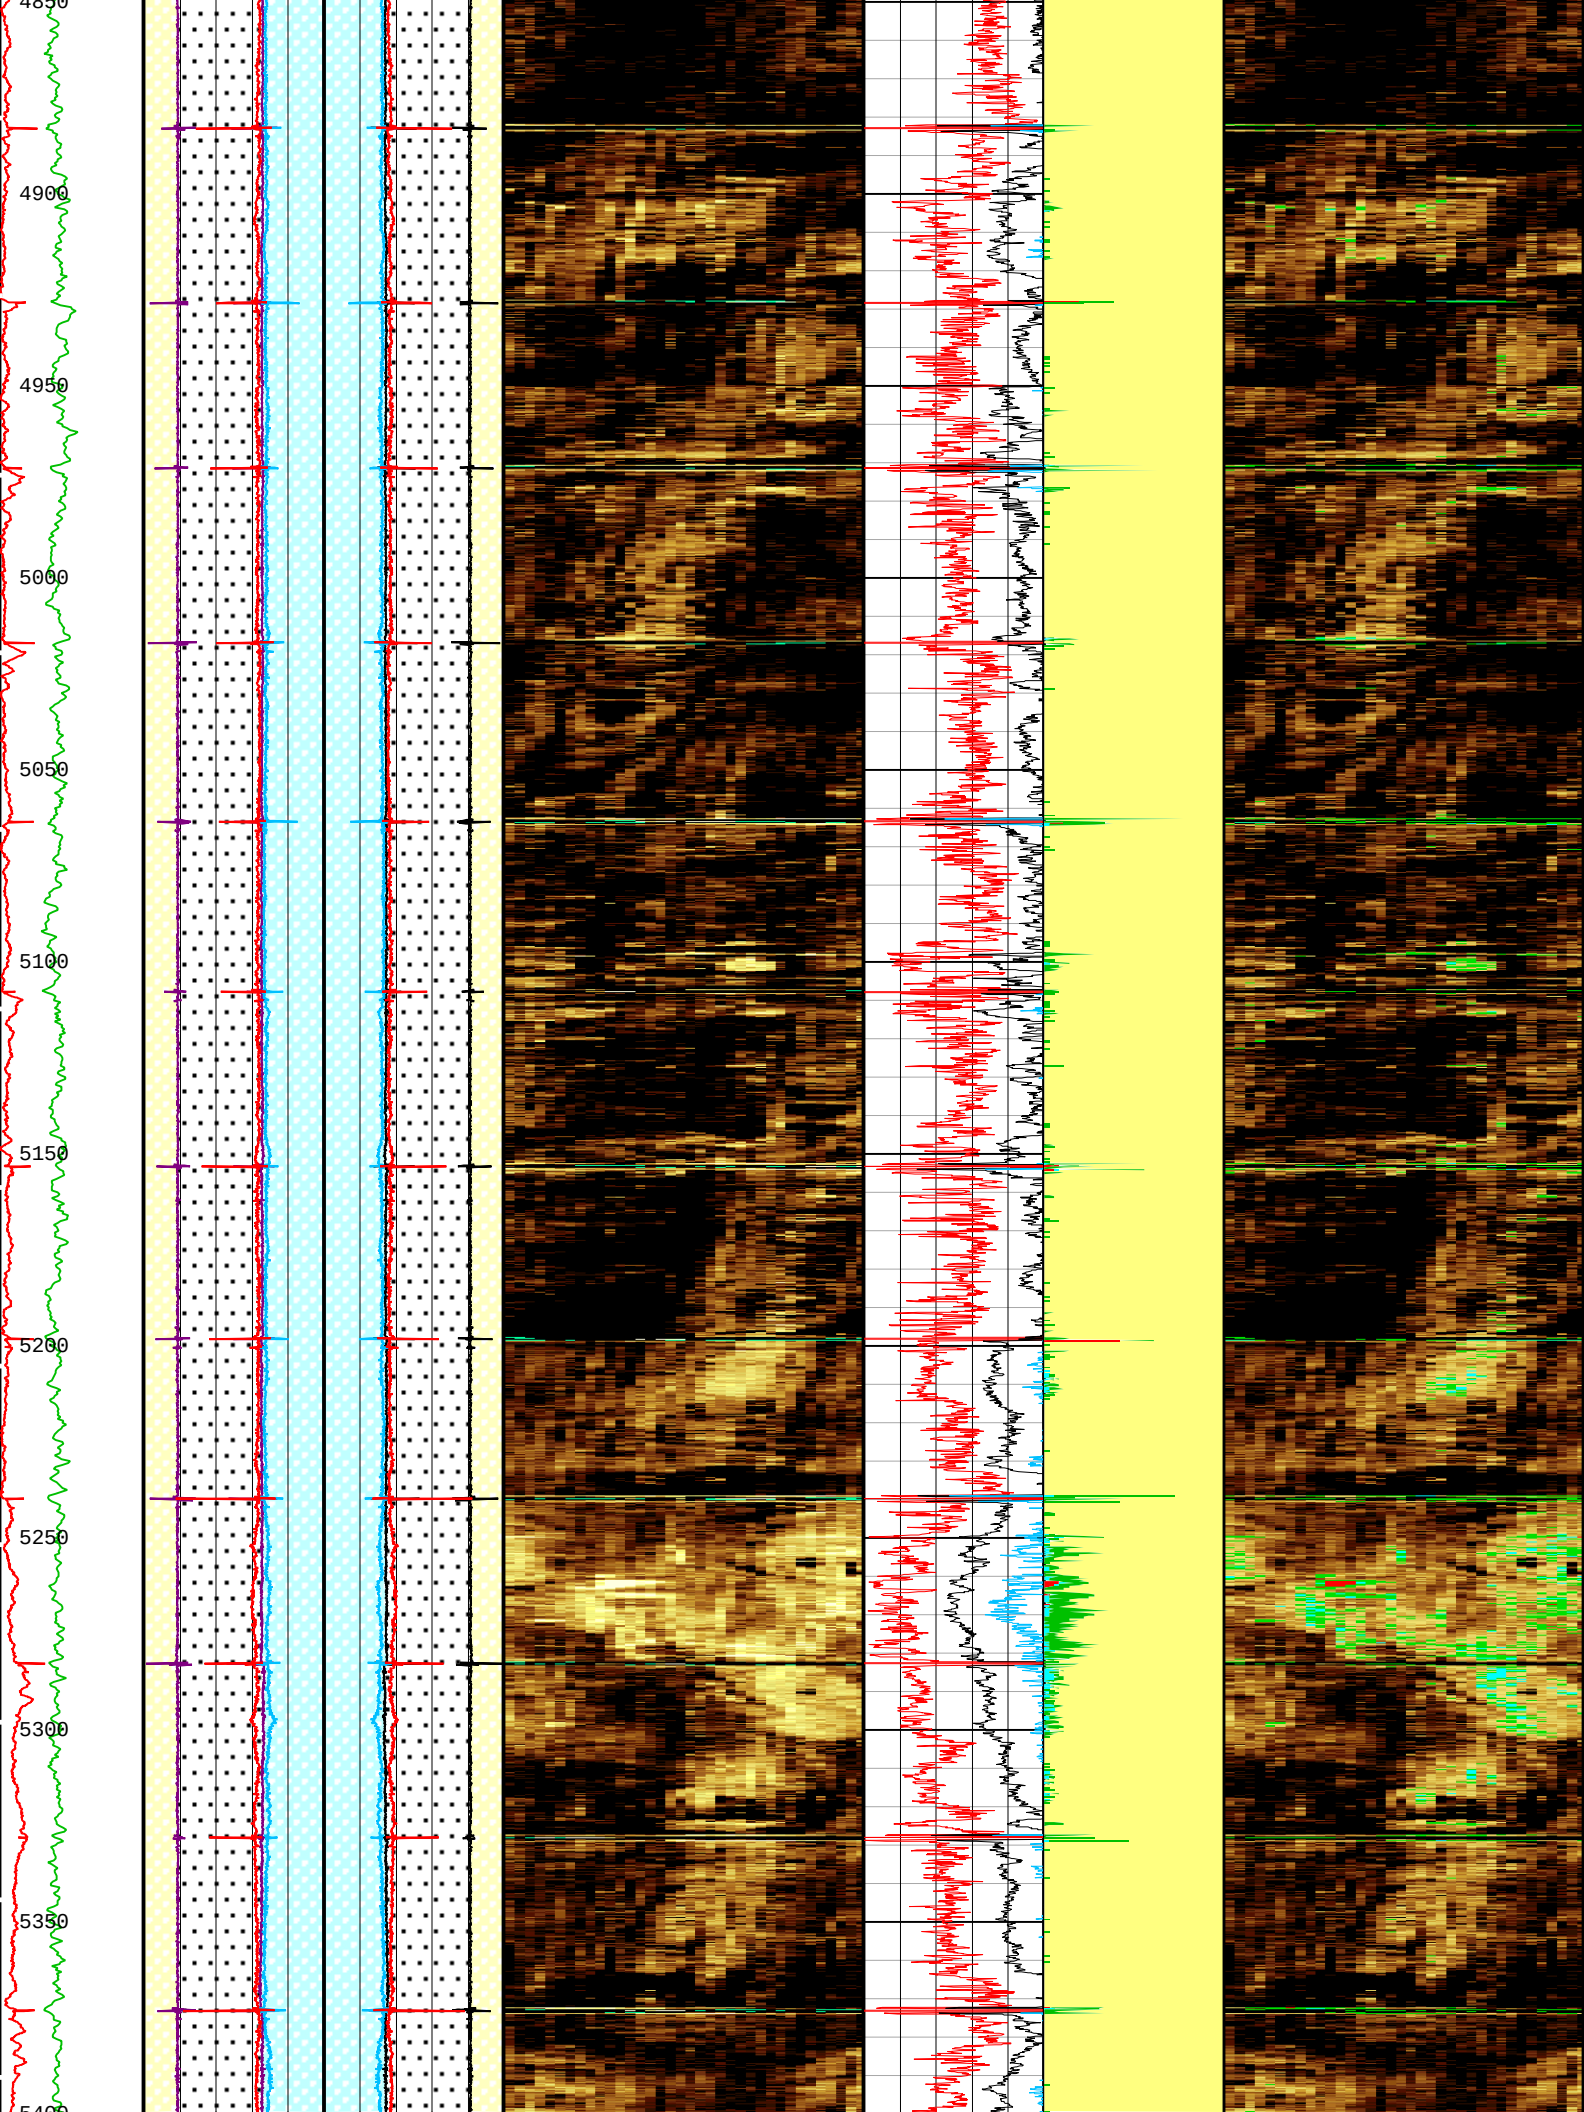
4850
4900
4950
5000
5050
5100
5150
5200
5250
5300
5350
5400

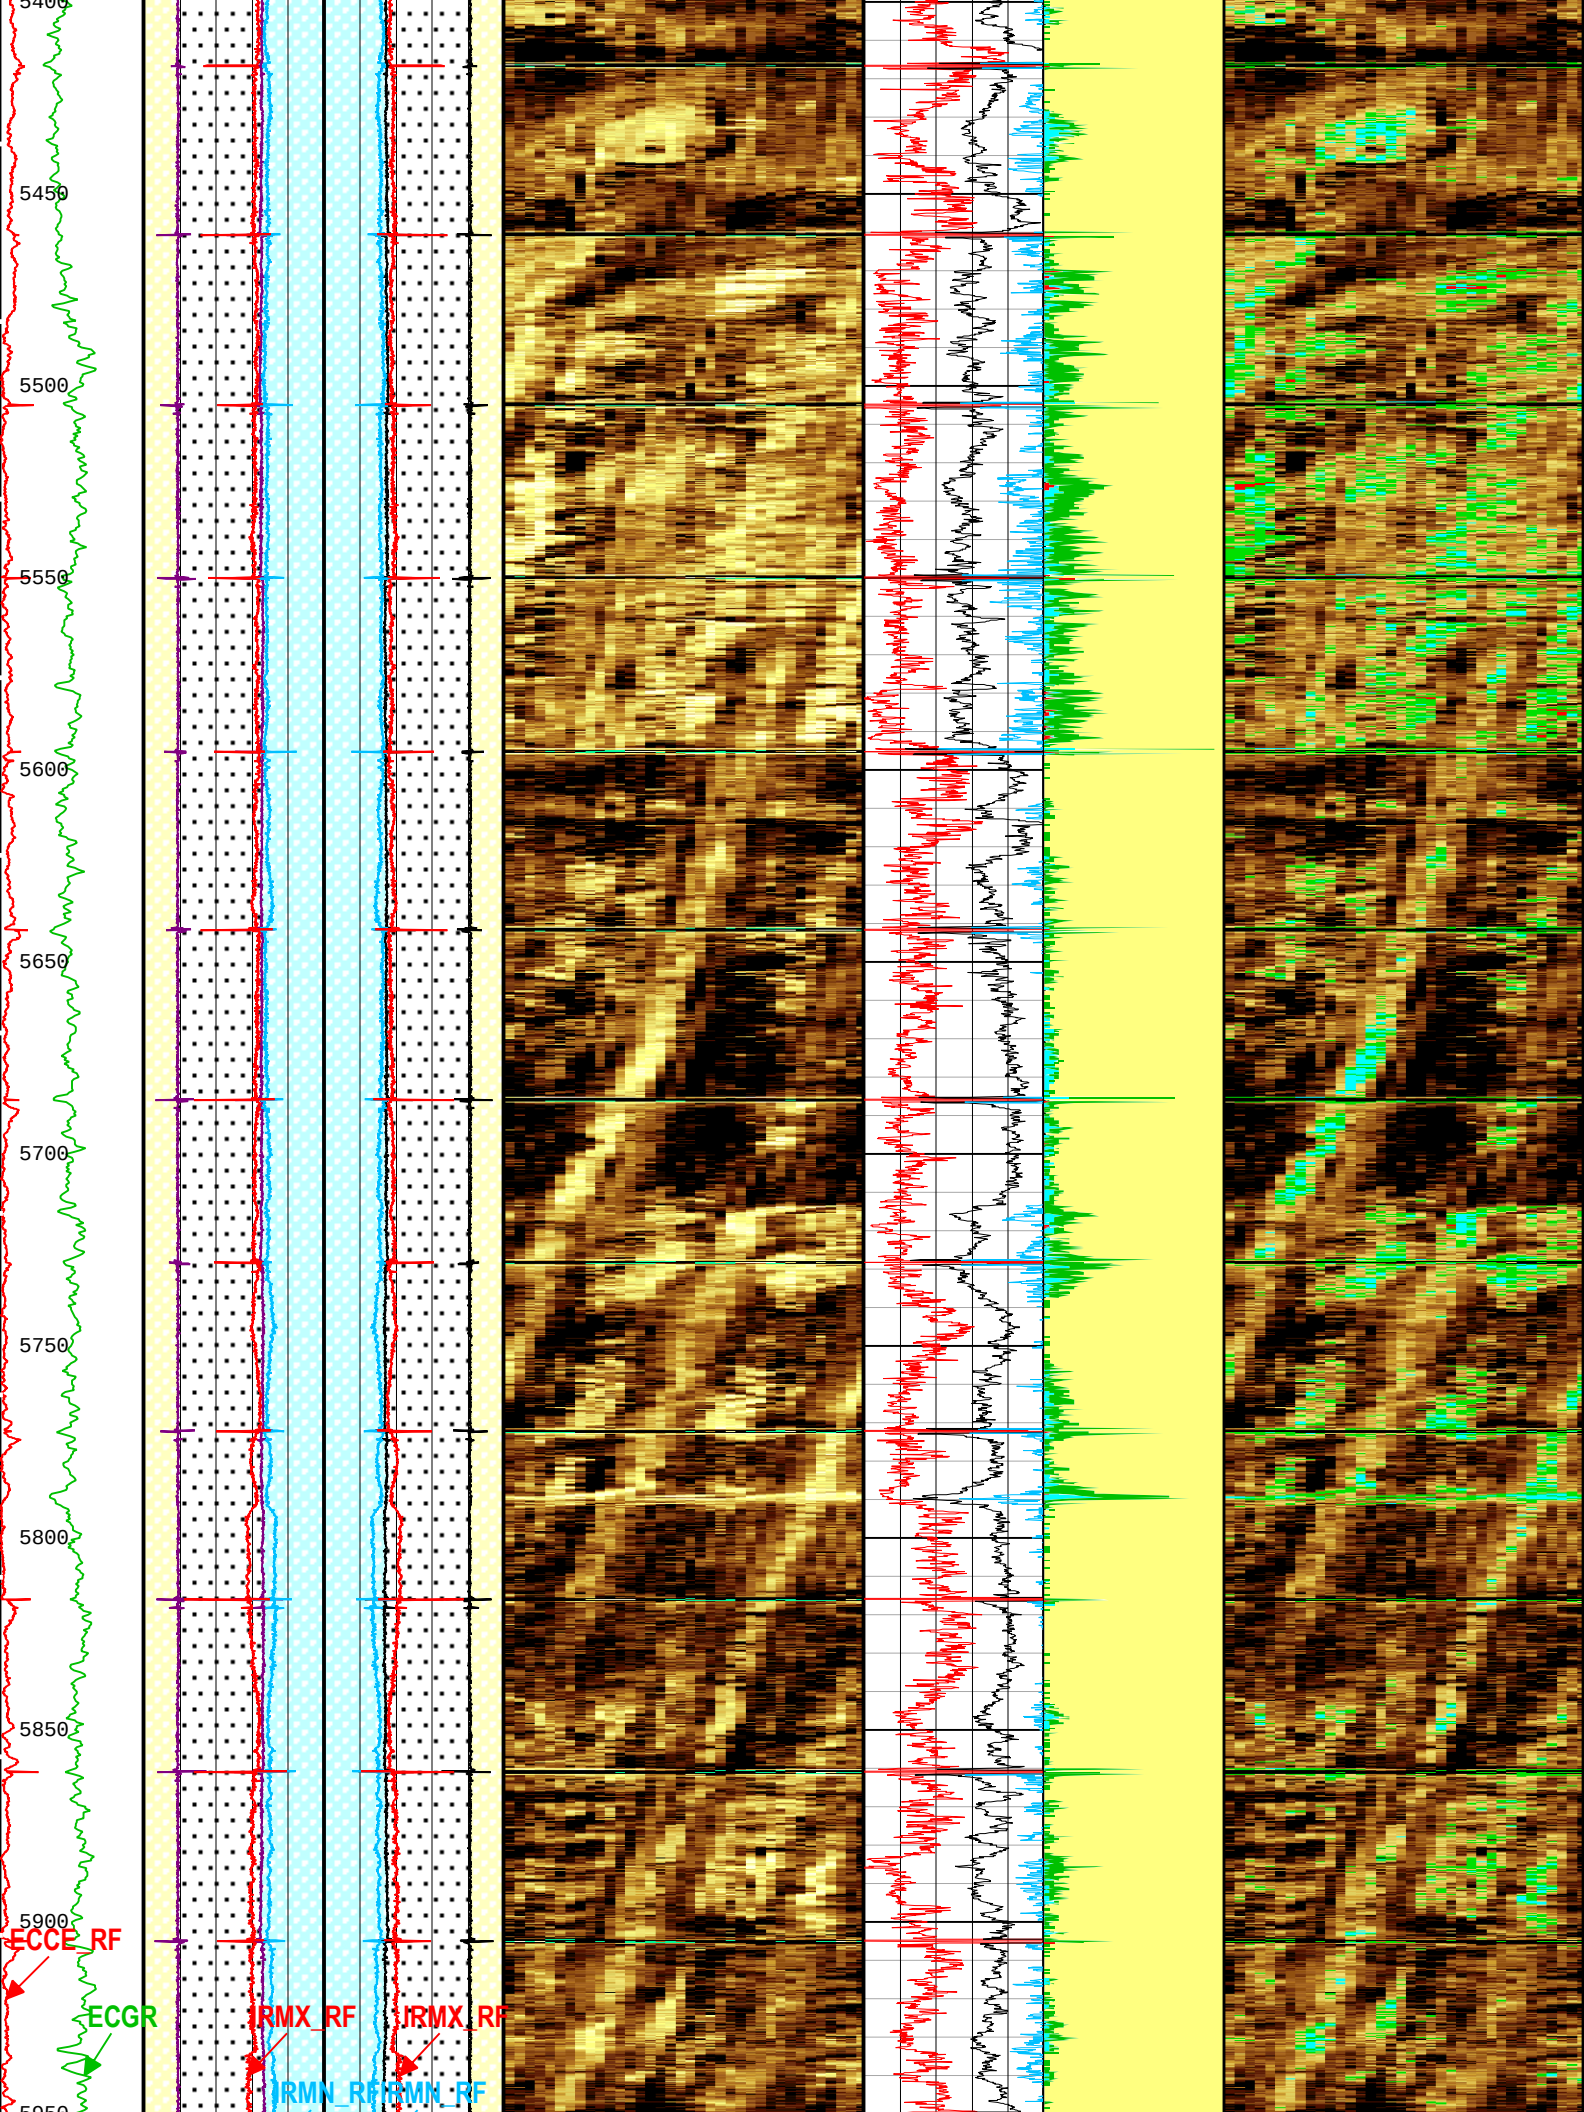
5400
5450
5500
5550
5600
5650
5700
5750
5800
5850
5900
5950
ECCE_RF
ECGR
JRMX_RF
JRMX_RF
JRMN_RF
JRMN_RF

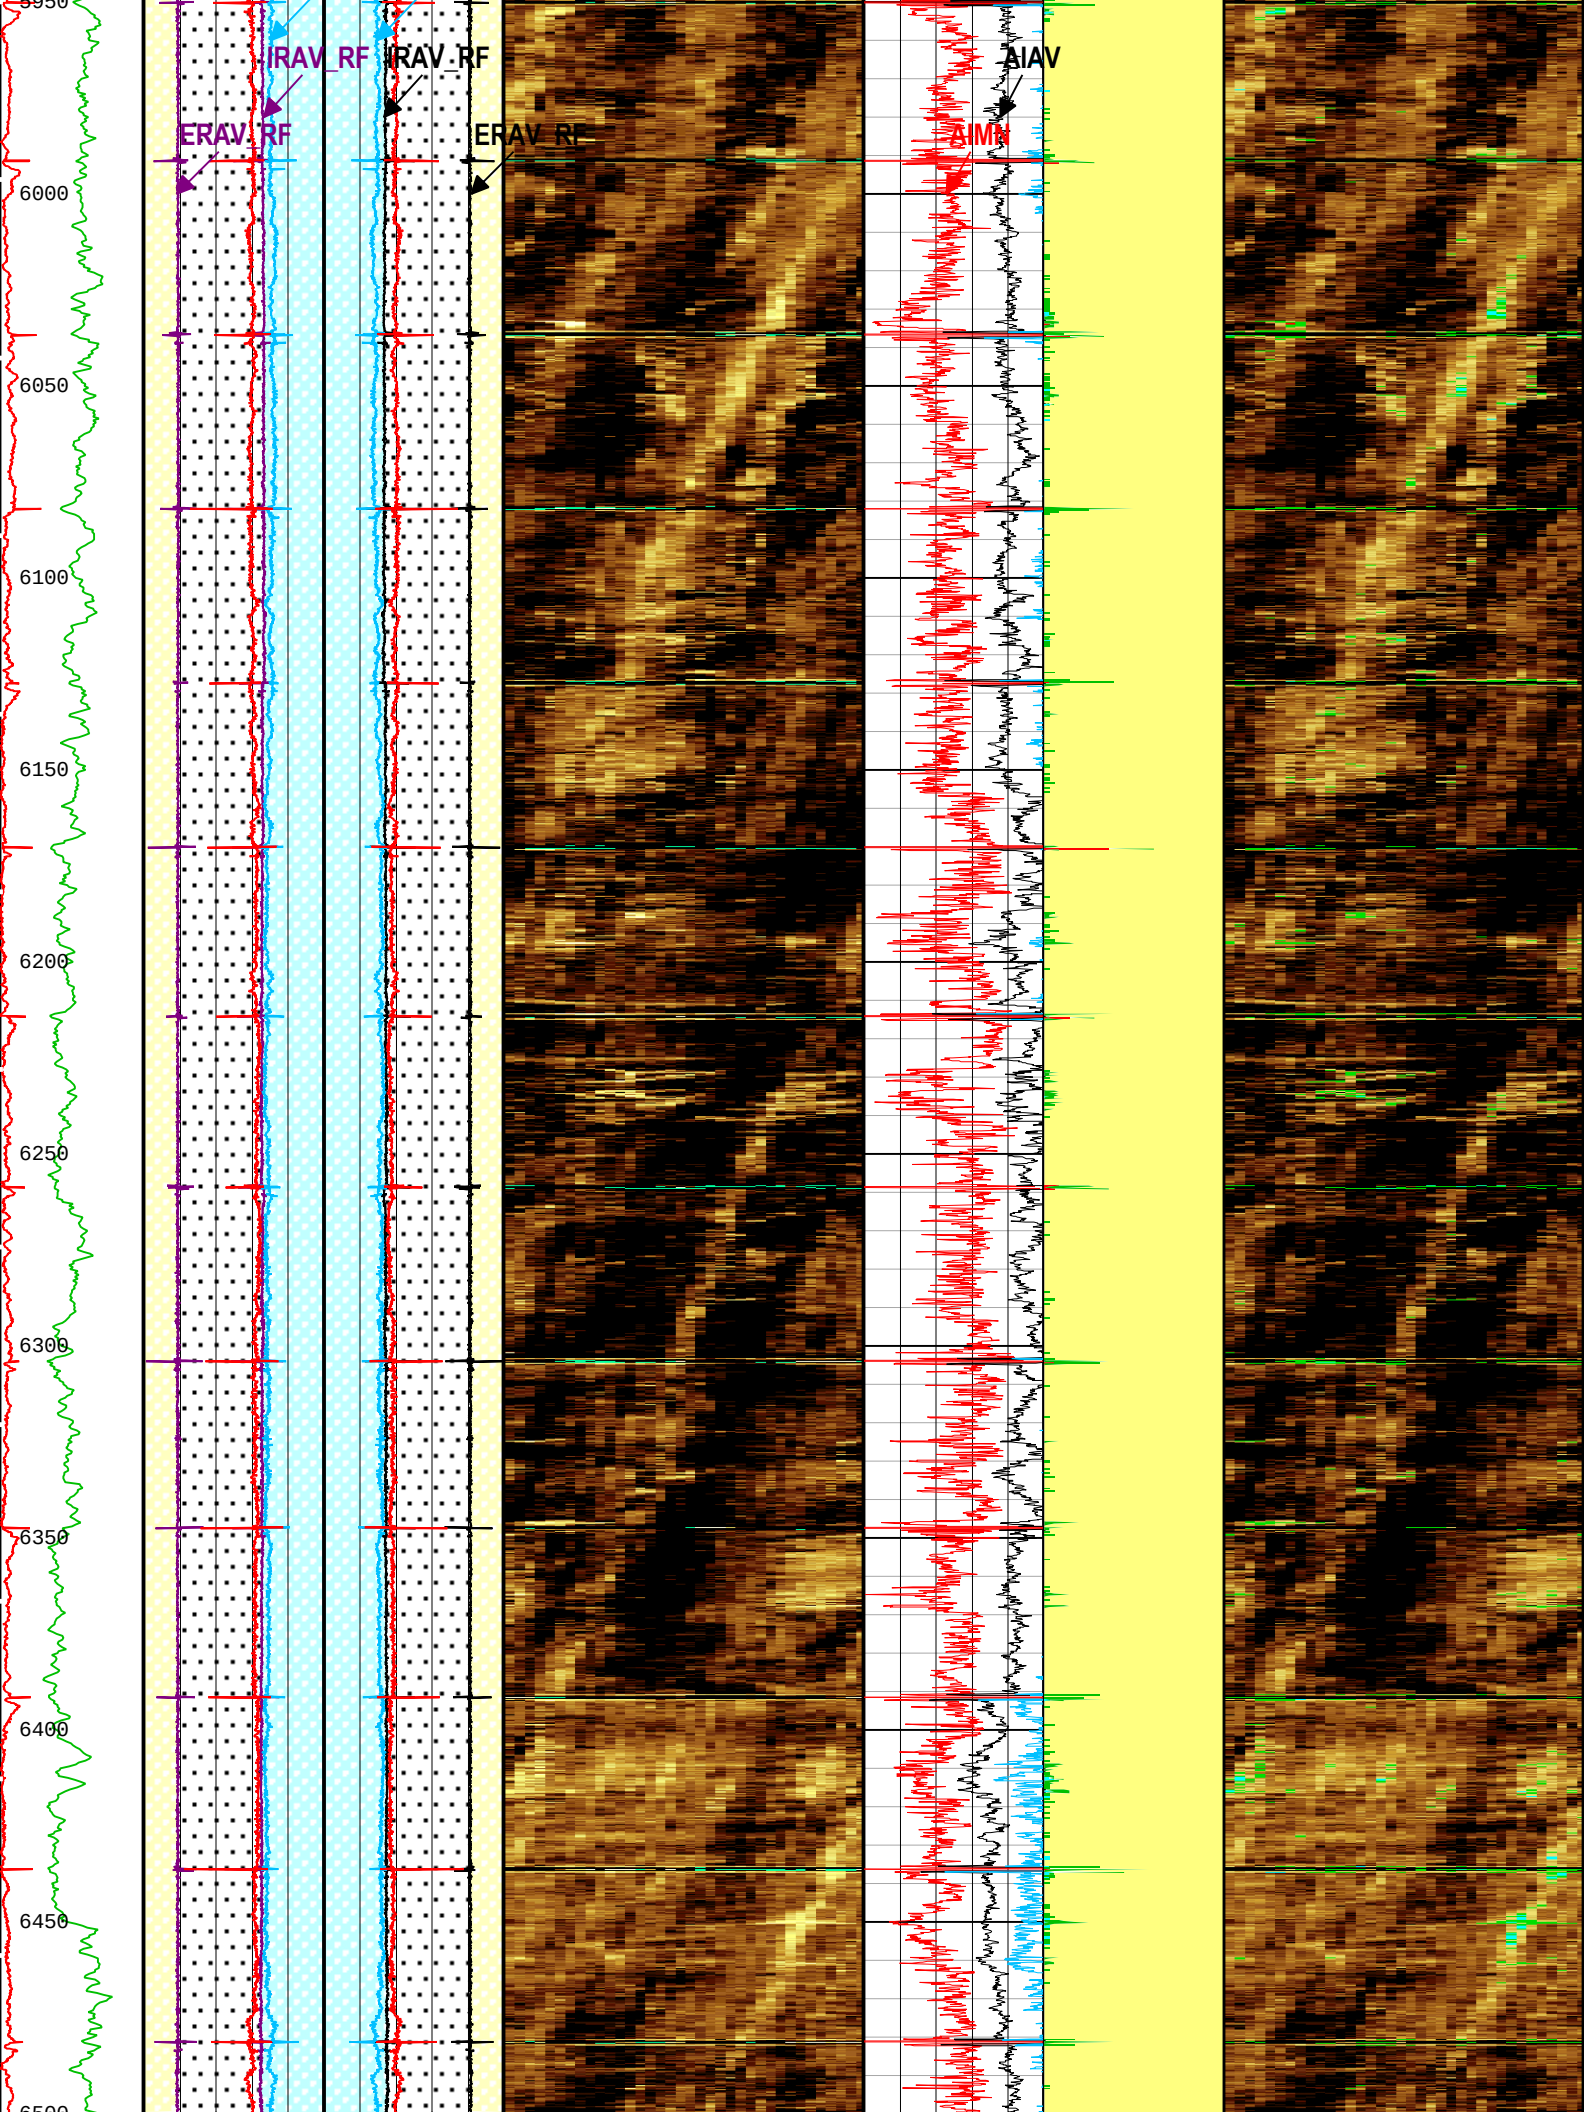
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
AIAV
AIMP
6000
6050
6100
6150
6200
6250
6300
6350
6400
6450
6500

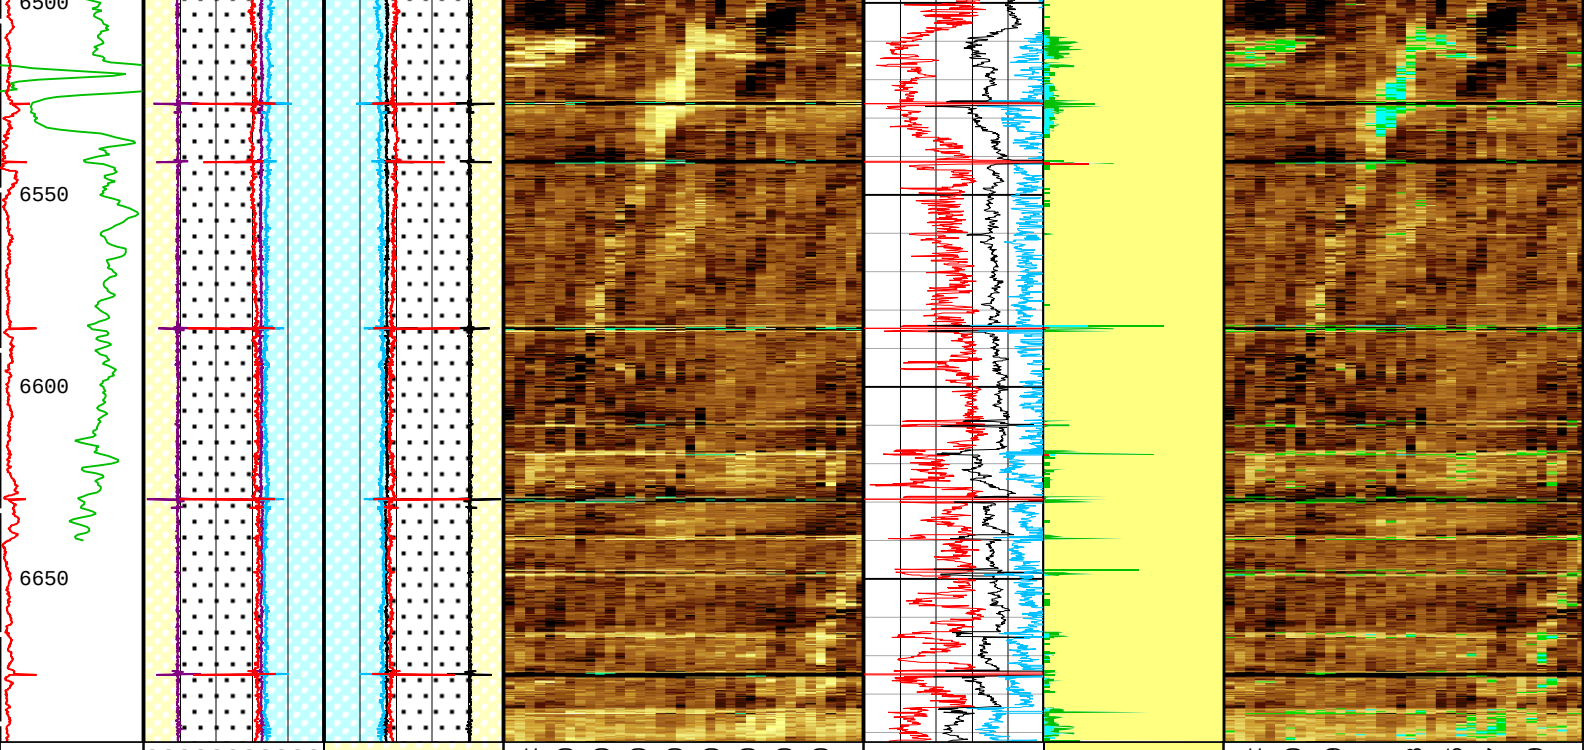

Gamma Ray (ECGR) HGNS[1]
0 gAPI 150

Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E[1]
0 in 1

ERAV_IRAV | ERAV_RHF1
IRAV_LHF1 | IRAV_ERAV
LHF1_ERAV | RHF1_IRAV

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
5 in 4

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
4 in 5

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
5 in 4

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
4 in 5

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
5 in 4

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
5 in 4

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
4 in 5

Custom Normalization
USIT - Acoustic Impedance (AIBK) USIT-E[1] (Mrayl)

Acoustic Impedance Minimum (AIMN) USIT-E[1]
-1 Mrayl 9

Acoustic Impedance Average (AIAV) USIT-E[1]
-1 Mrayl 9

Acoustic Impedance Maximum (AIMX) USIT-E[1]
-1 Mrayl 9

Bonded
Gas
Liquid
Micro-debonding

Custom Normalization
USIT - Acoustic Impedance With Micro-debonding Image (AI_MDEBOND_IMG) USIT-E[1] (Mrayl)

TIME_1900 - Time Marked every 60.00 (s)

Description: USI Cement Format: Log (LBV1_USI Cement 9.625inch) Index Scale: 2 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 28-Jun-2016 19:08:21

Composite 1

Corrosion 5 in = 100 ft

Composite Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
28Jun2016	Log[3]:Up	Up	90.40 ft	6692.79 ft	28-Jun-2016 8:34:23 AM	28-Jun-2016 11:17:22 AM	ON	0.00 ft	Yes
28Jun2016	Log[7]:Up	Up	23.45 ft	330.21 ft	28-Jun-2016 1:20:55 PM	28-Jun-2016 1:39:36 PM	ON	6.00 ft	Yes

All depths are referenced to toolstring zero

Log

Company:Southern California Gas Company Well:Porter 72B

Composite 1:S005

Description: USI Composite Format: Log (LBV1_USI Corrosion 9.625inch) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth

Creation Date: 28-Jun-2016 19:08:54

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E[1]

1 - UFLG 1 Value within [0.0 - 1.5] - :

2 - UFLG 2 Value within [1.5 - 2.5] - :

3 - UFLG 3 Value within [2.5 - 3.5] - :

4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :

5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :

- UTIM Error
- Pulse Origin Not Detected
- WINLEN Error
- Casing Thickness Error
- Loop Processing Error

Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E[1]
0 in 0.5

Motor Revolution Speed (RSAV) USIT-E[1]
6 c/s 8

Gamma Ray (EHGR) HGNS[1]
0 gAPI 150

Absent 1.500 3.500
Explicit Normalization
USIT - USIT Processing Flags (UFLG) USIT-E[1]

USIT Processing Flags (UFLG[0]) USIT-E[1]
1 5

Absent -5.200 -3.600 -2.000 -0.400
Explicit Normalization
USIT - Amplitude of Unflagged Wave (AWBK_RF) USIT-E[1]
(dB)

Minimum of Unflagged Wave Amplitude (AWMN_RF) USIT-E[1]
0 dB 75

Average of Unflagged Wave Amplitude (AWAV_RF) USIT-E[1]
0 dB 75

Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E[1]
0 dB 75

Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E[1]
(in)

Internal Radius Averaged Value (IRAV) USIT-E[1]
4 in 5

Internal Radius Maximum Value (IRMX) USIT-E[1]
4 in 5

Internal Radius Minimum Value (IRMN) USIT-E[1]
4 in 5

ERAV | IRAV
ERAV-IRAV | ERAV
IRAV | IRAV-ERAV

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
5 in 4

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
4 in 5

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
5 in 4

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
5 in 4

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
4 in 5

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
5 in 4

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
4 in 5

Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E[1]
(in)

Minimum of Unflagged Casing Thickness (THMN_RF) USIT-E[1]
0.1 in 0.6

Nominal Casing Thickness (THNO) USIT-E[1]
0.1 in 0.6

Median of Unflagged Casing Thickness (THAV_RF) USIT-E[1]
0.1 in 0.6

Maximum of Unflagged Casing Thickness (THMX_RF) USIT-E[1]
0.1 in 0.6

20

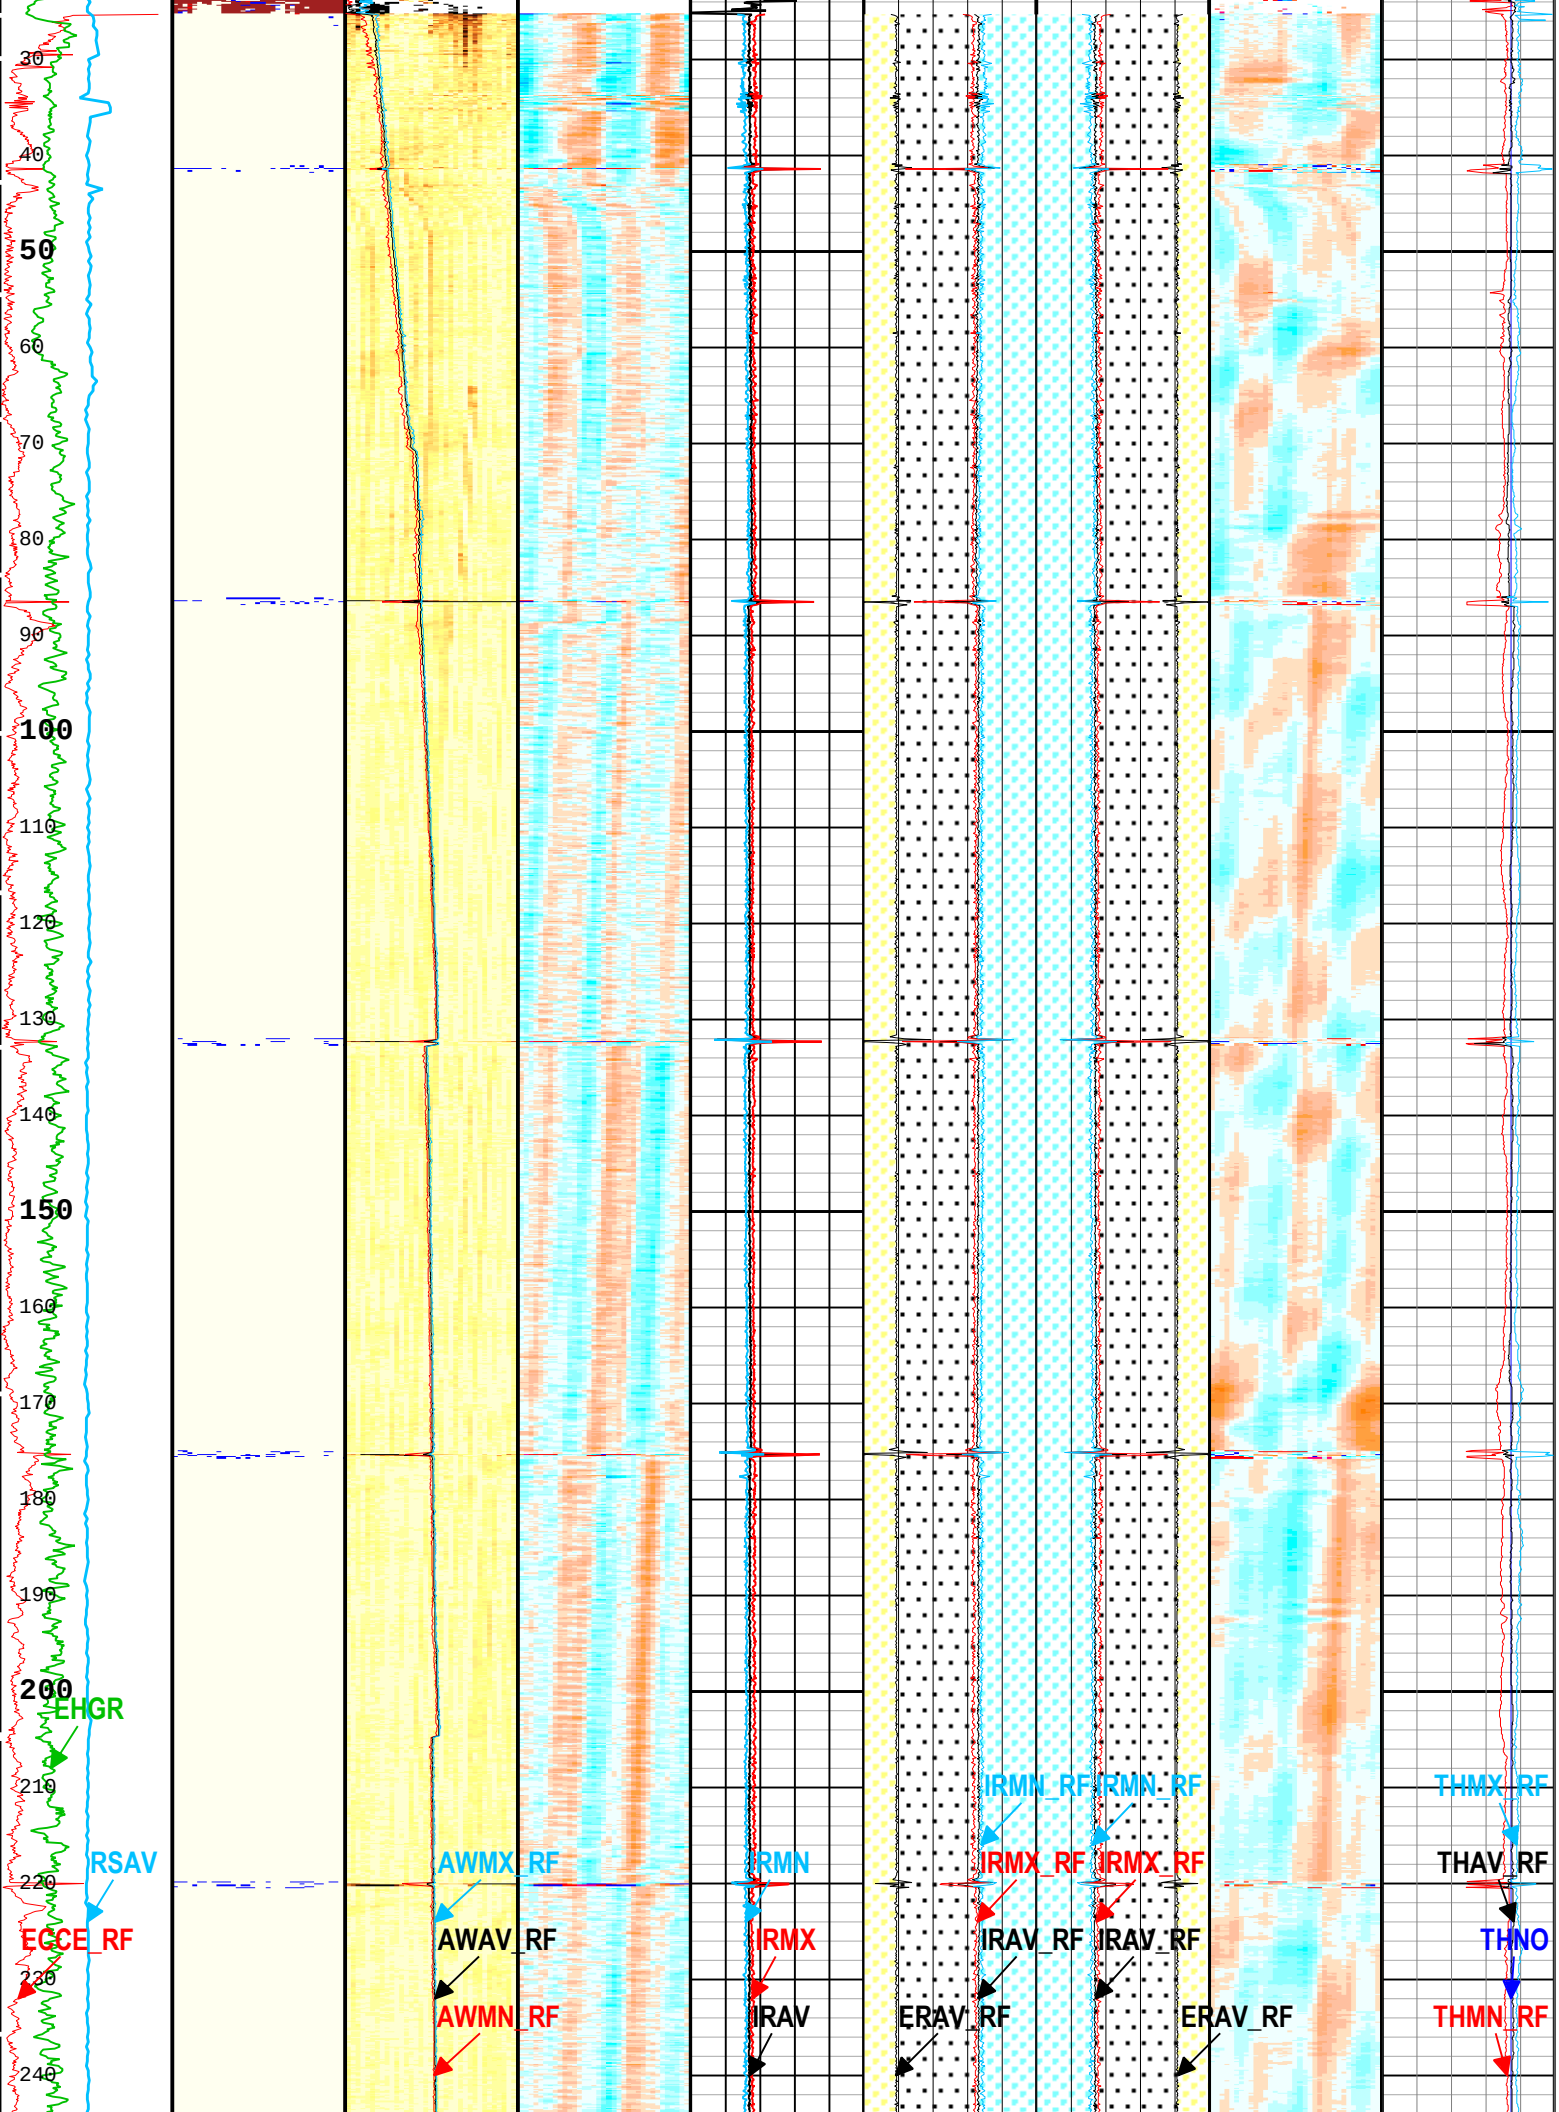
30
40
50
60
70
80
90
100
110
120
130
140
150
160
170
180
190
200
210
220
230
240
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

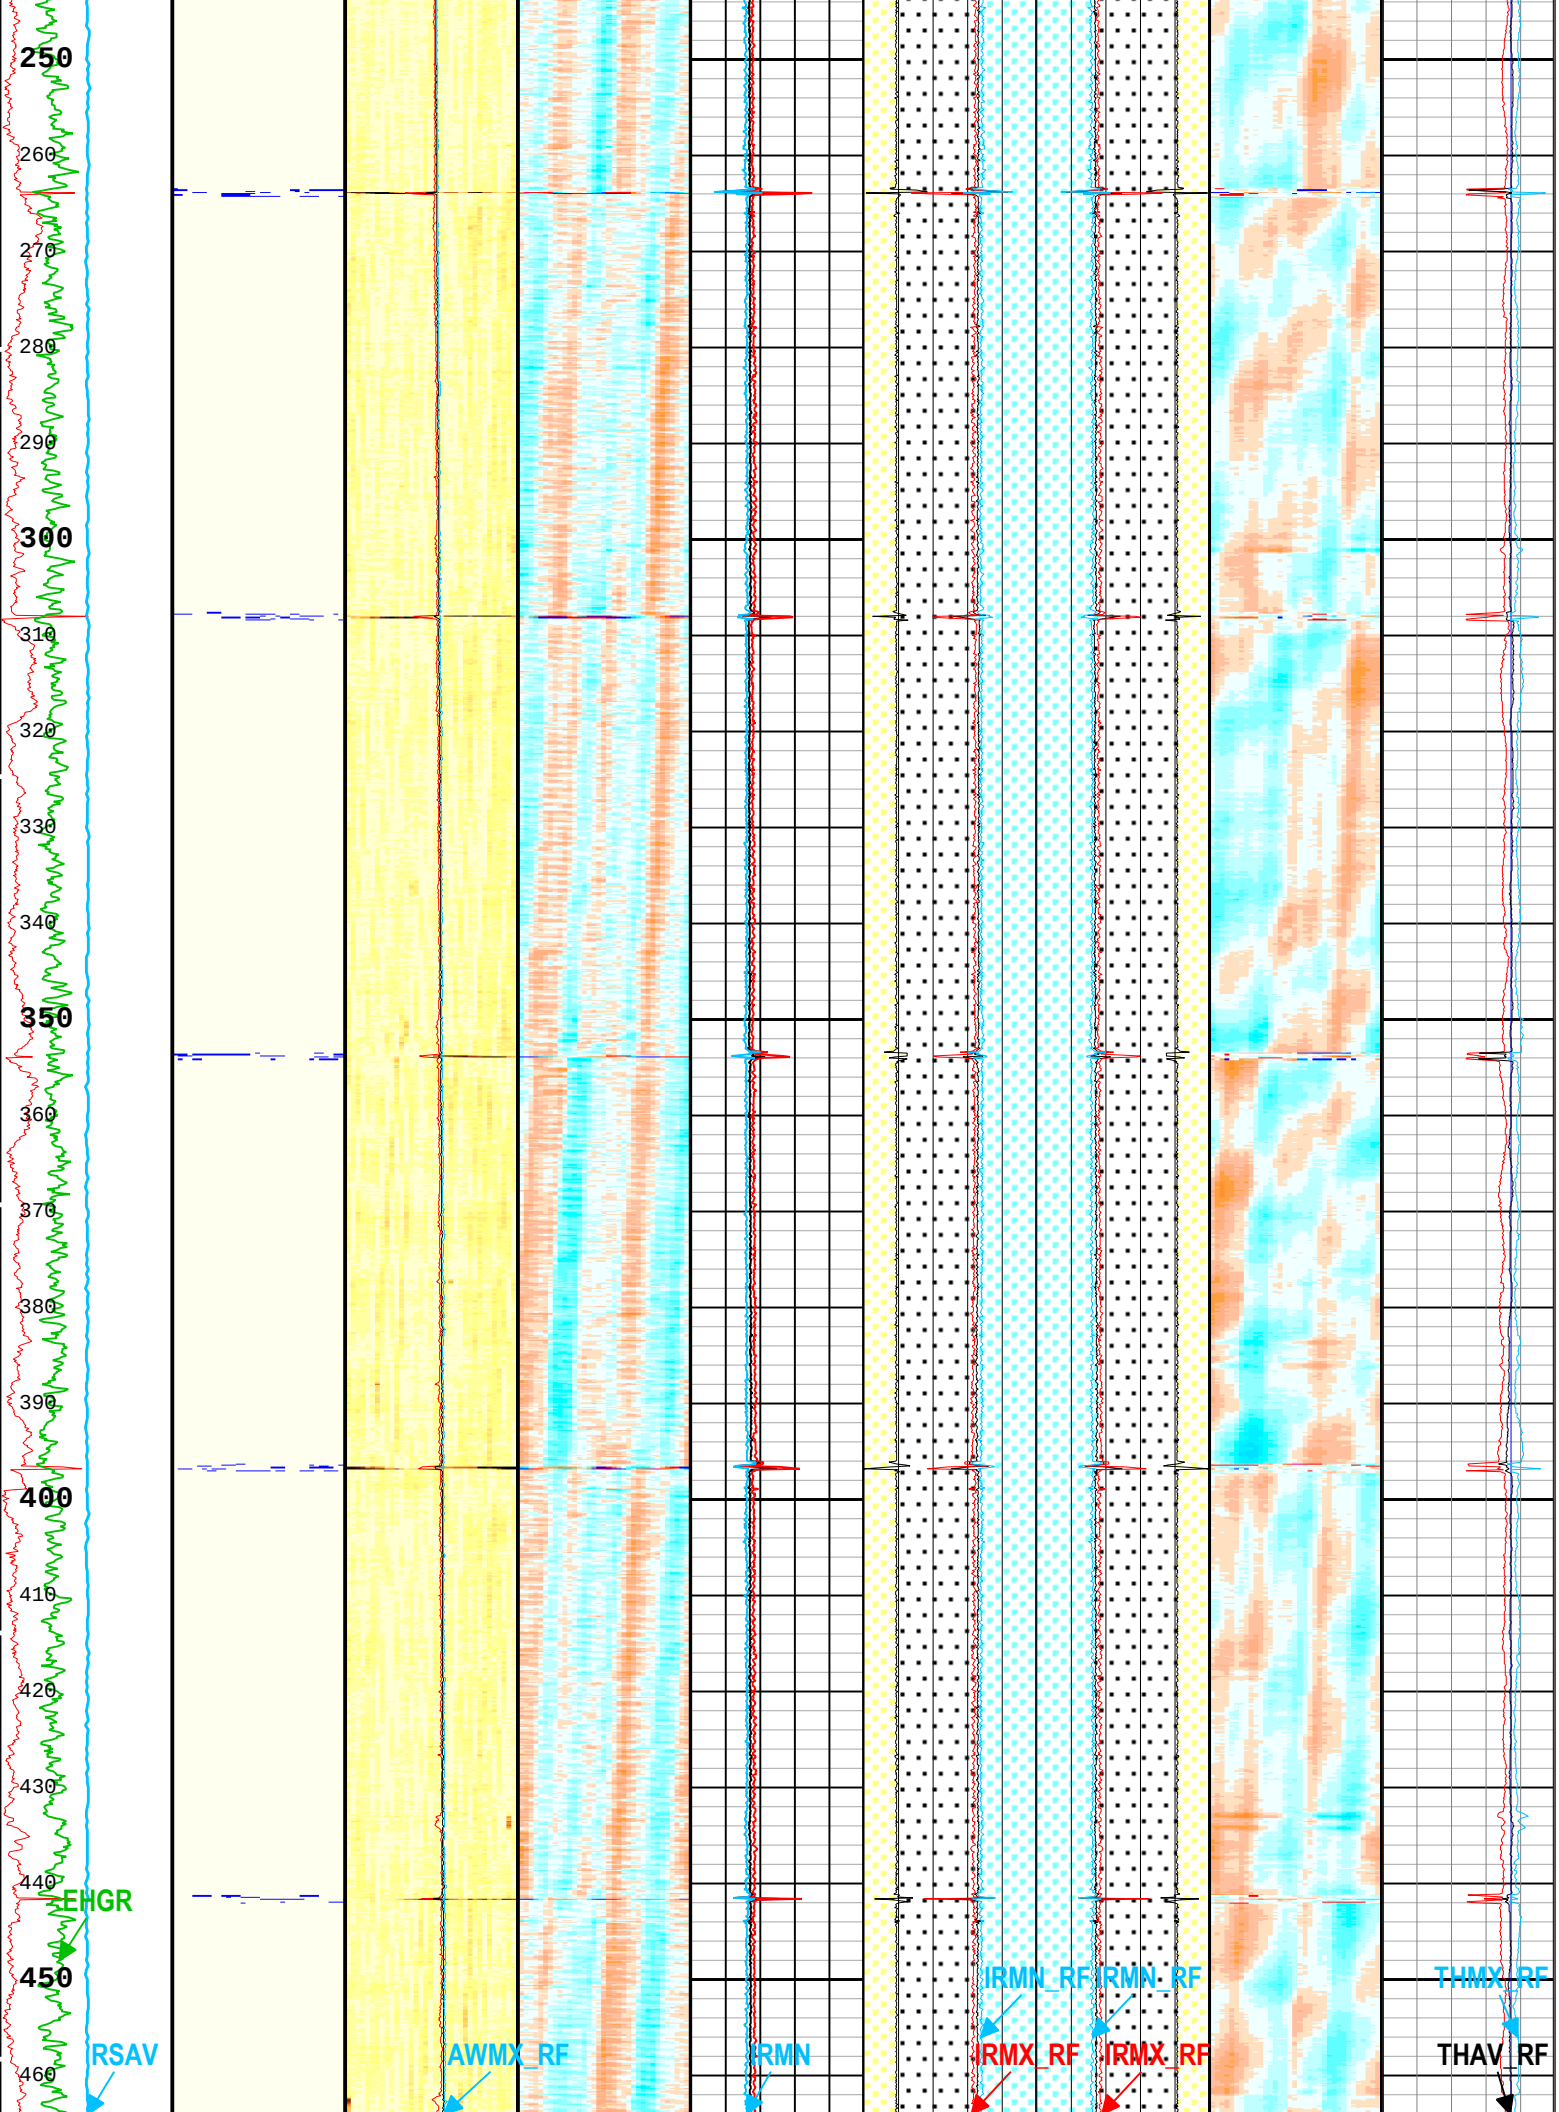
250
260
270
280
290
300
310
320
330
340
350
360
370
380
390
400
410
420
430
440
450
460
EHGR
RSAV
AWMX_RF
IRMN
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
THMX_RF
THAV_RF

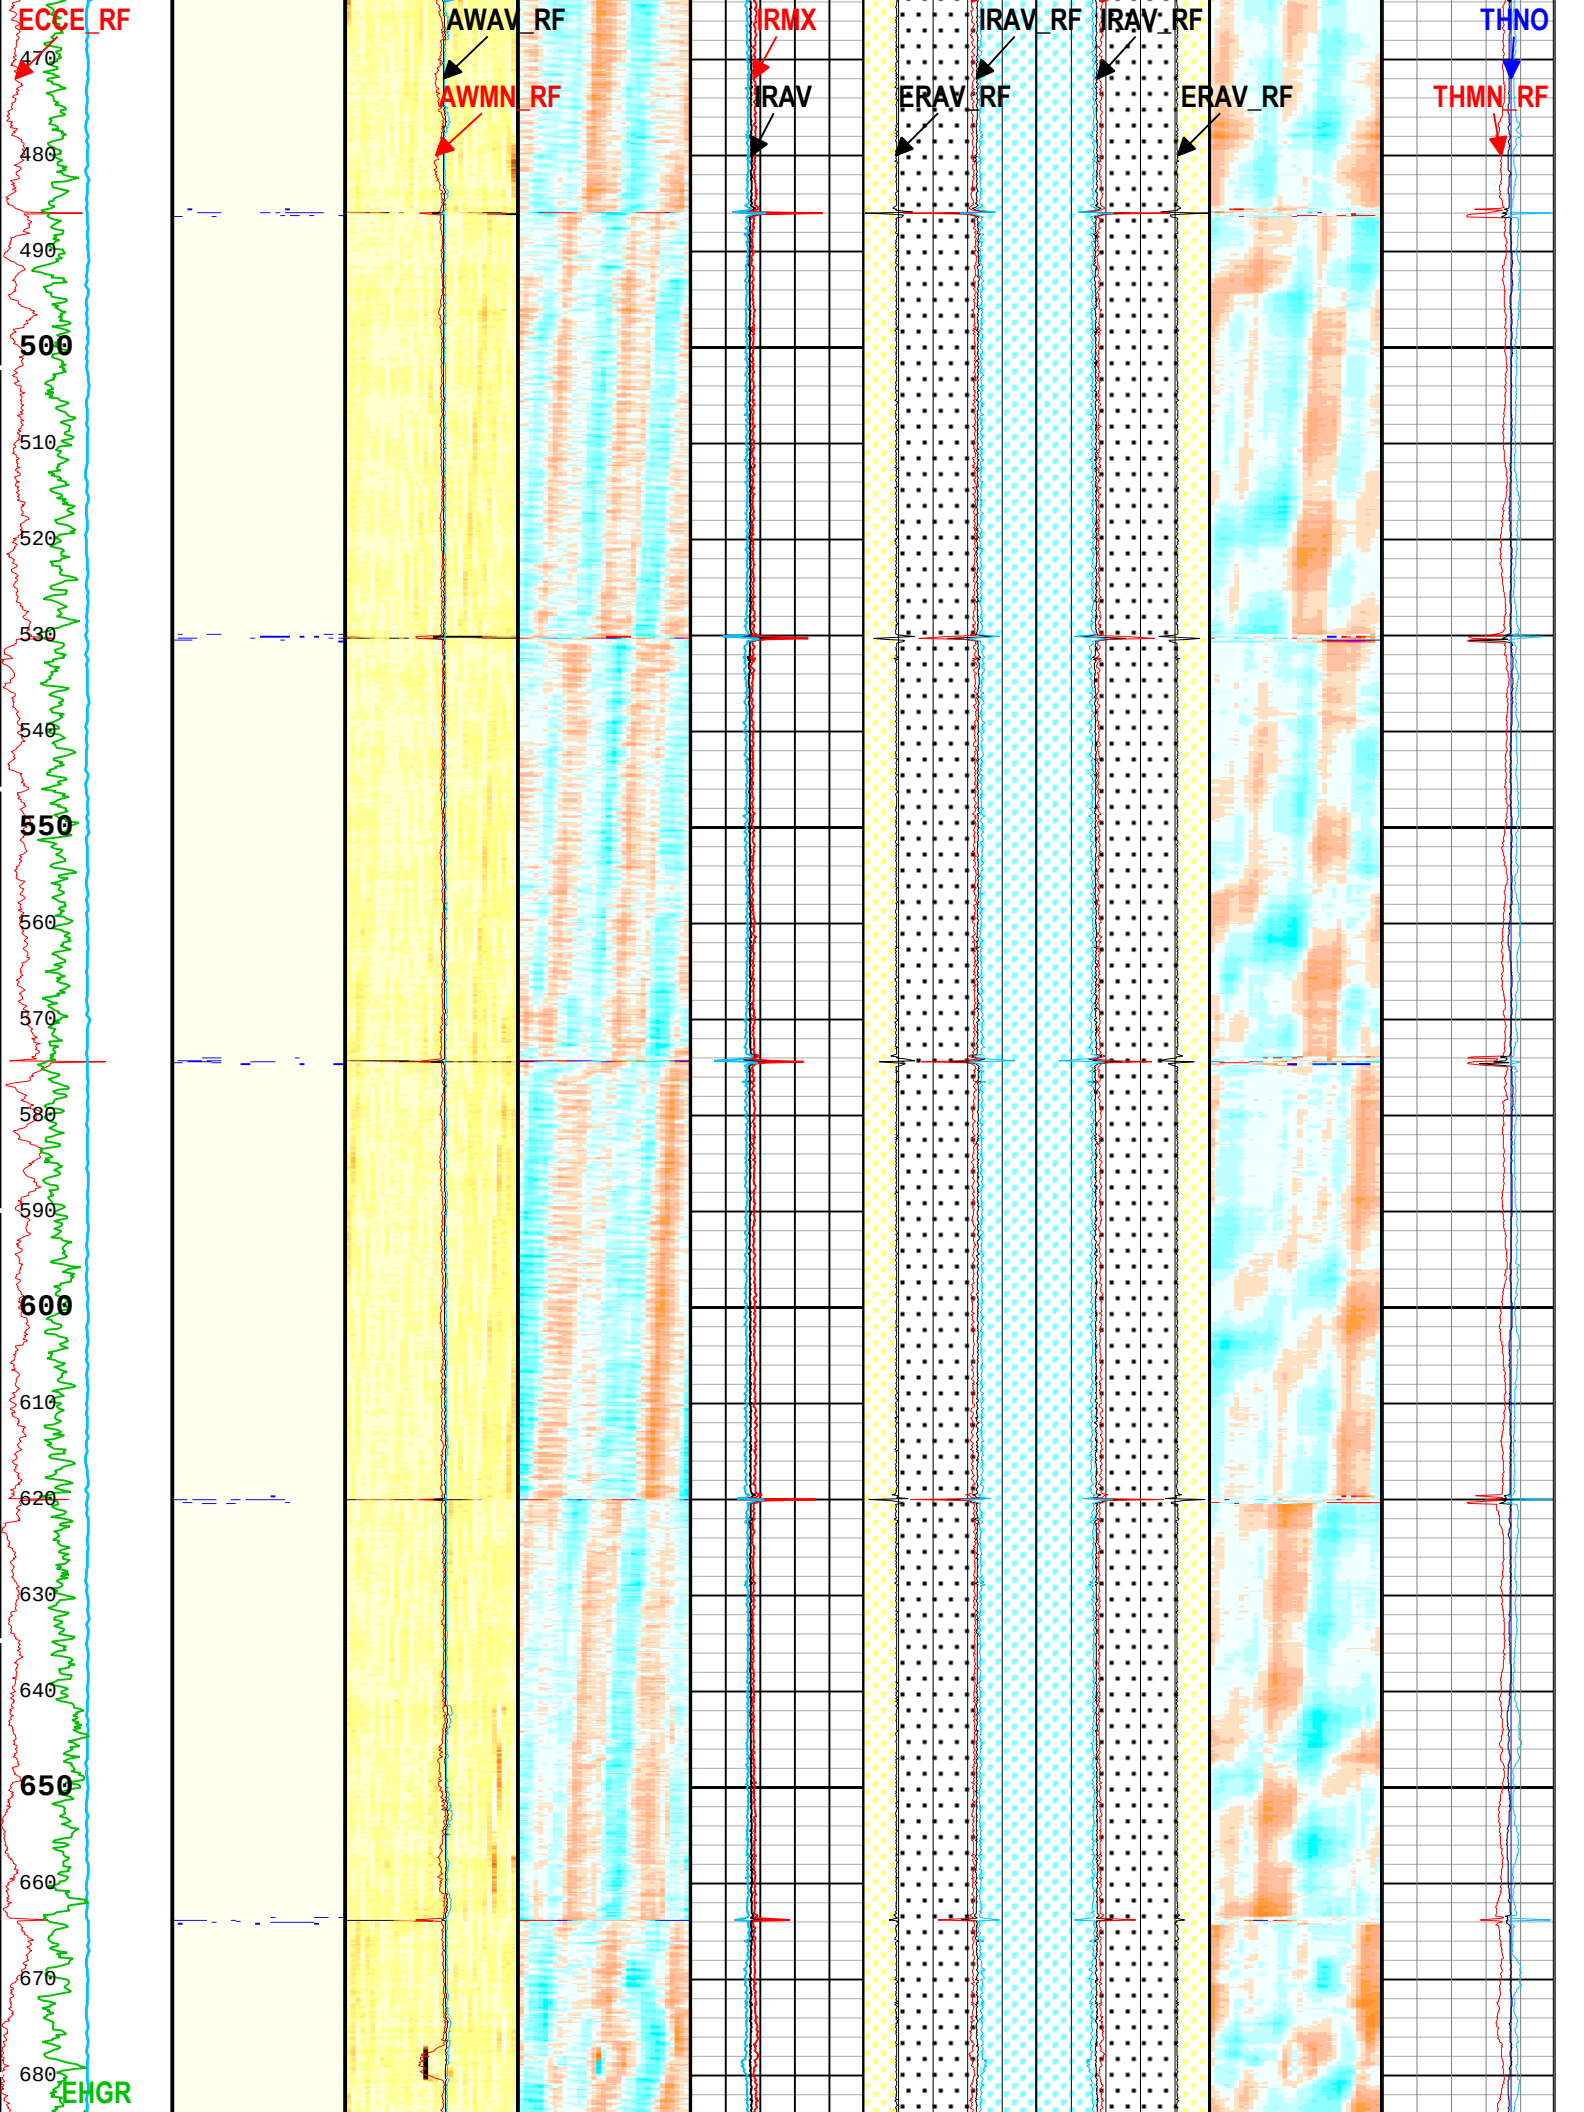
ECCE_RF
AWAV_RF
AWMN_RF
IRMX
IRAV
IRAV_RF
ERAV_RF
IRAV_RF
ERAV_RF
THNO
THMN_RF
470
480
490
500
510
520
530
540
550
560
570
580
590
600
610
620
630
640
650
660
670
680
EHGR

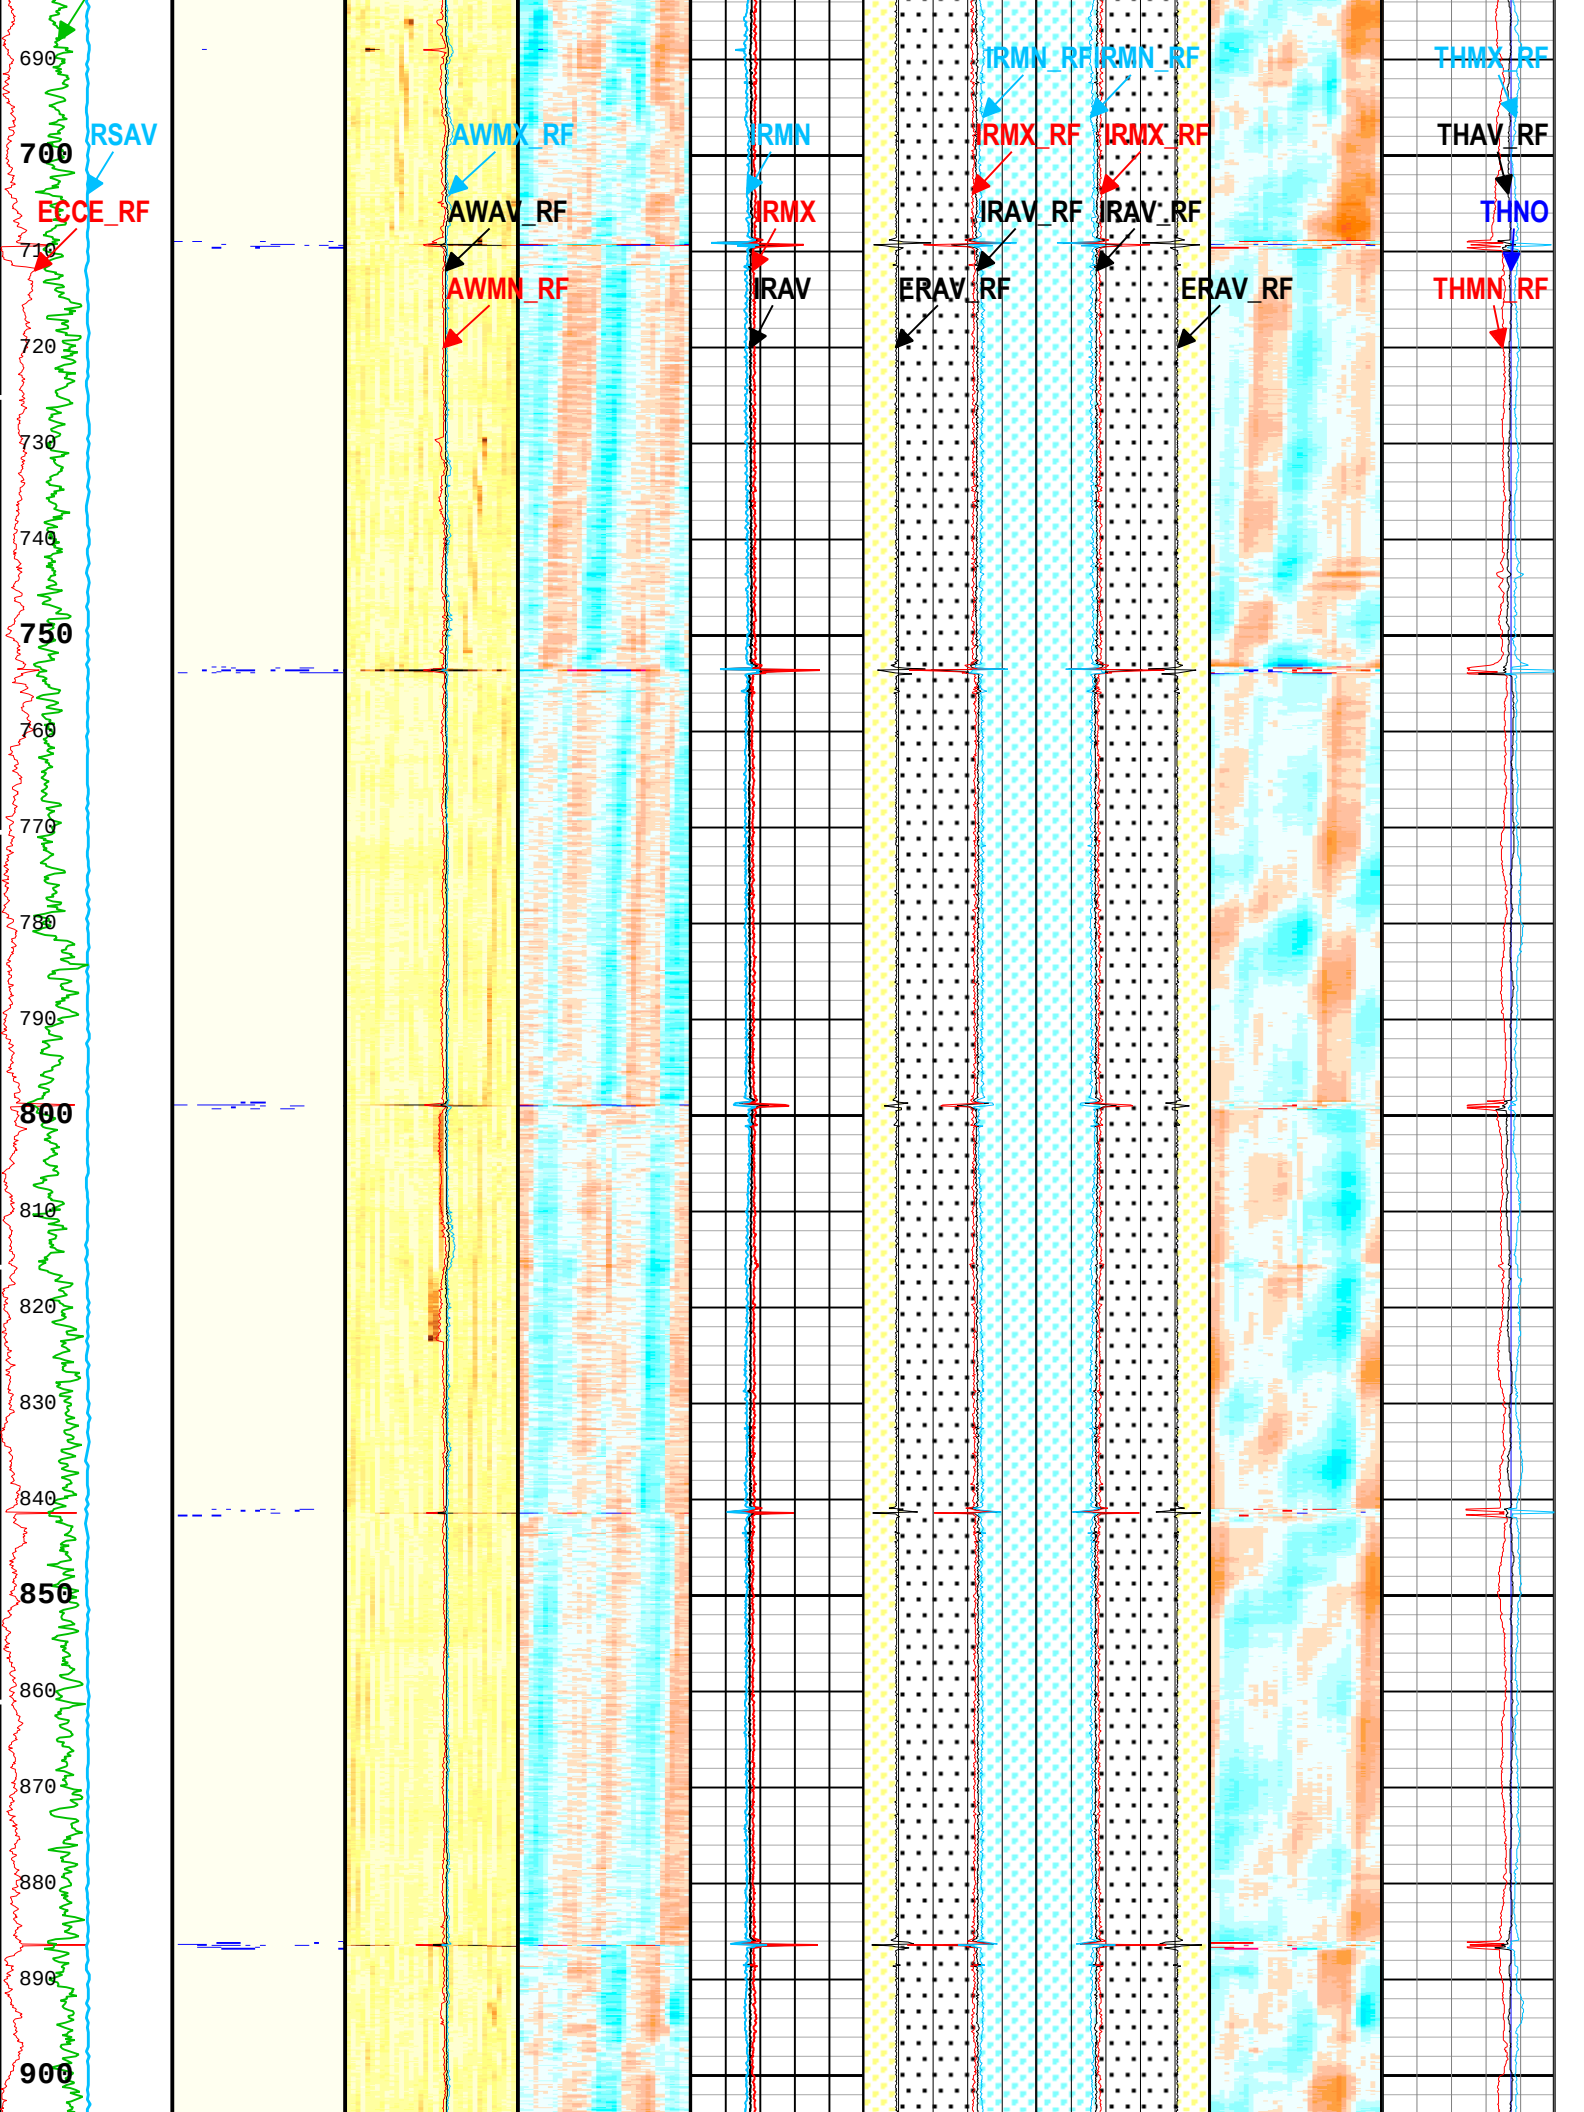
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
690
700
710
720
730
740
750
760
770
780
790
800
810
820
830
840
850
860
870
880
890
900

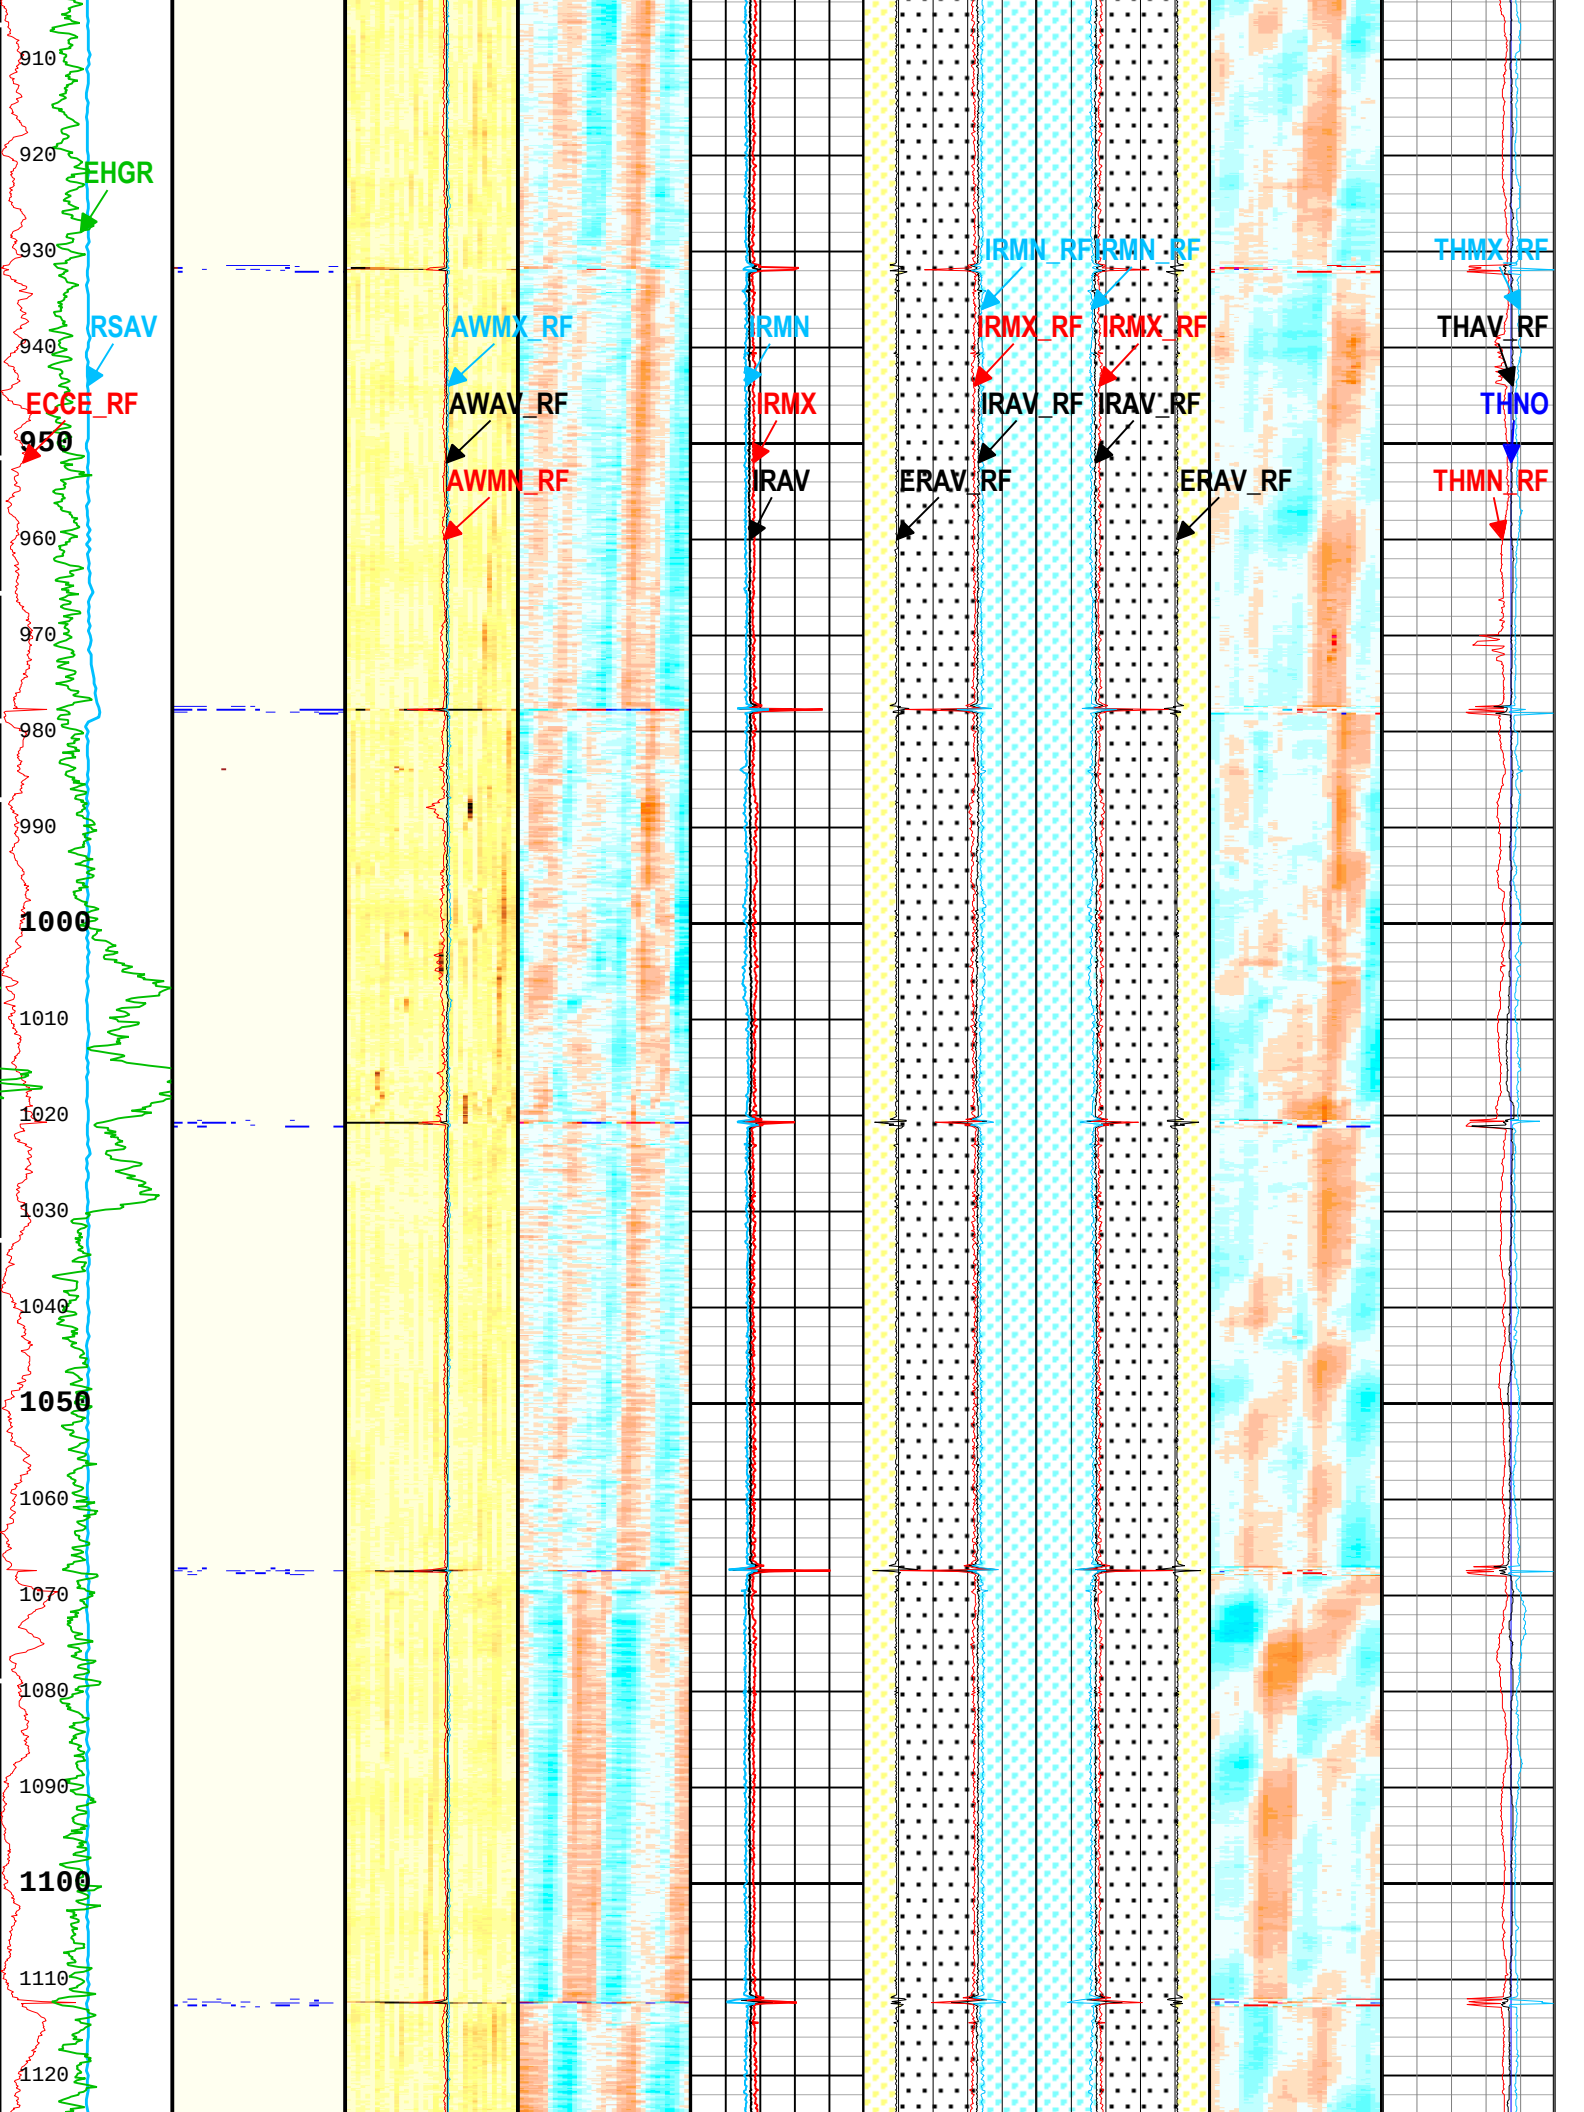
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
910
920
930
940
950
960
970
980
990
1000
1010
1020
1030
1040
1050
1060
1070
1080
1090
1100
1110
1120

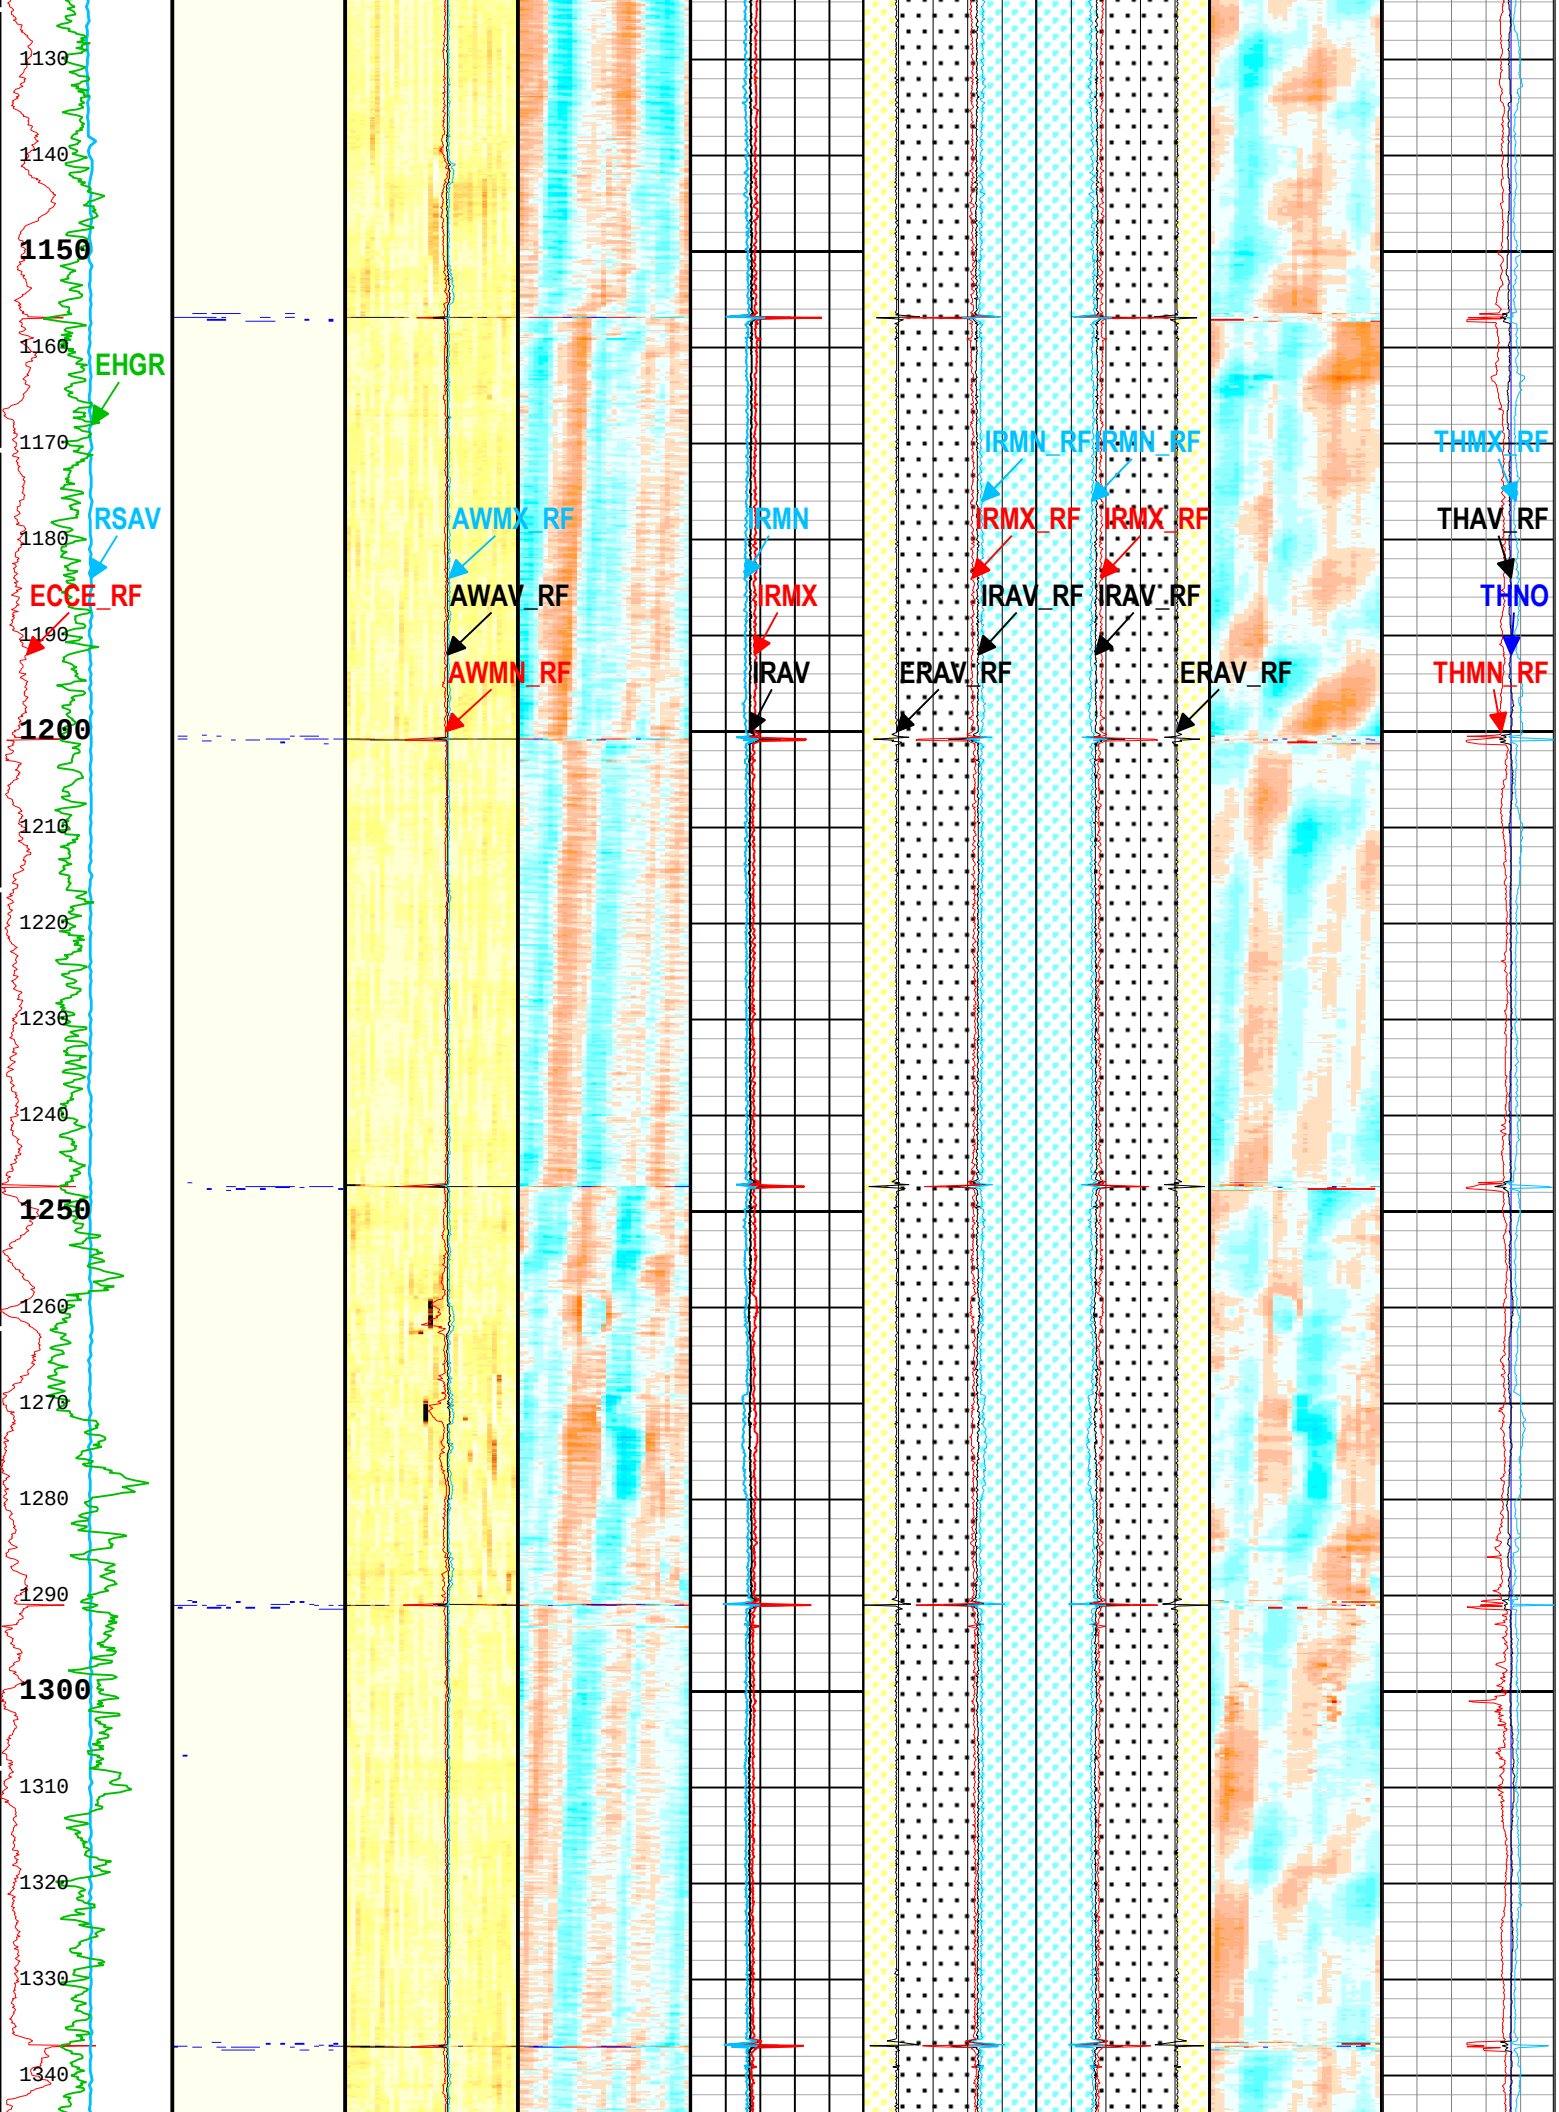
1130
1140
1150
1160
1170
1180
1190
1200
1210
1220
1230
1240
1250
1260
1270
1280
1290
1300
1310
1320
1330
1340
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

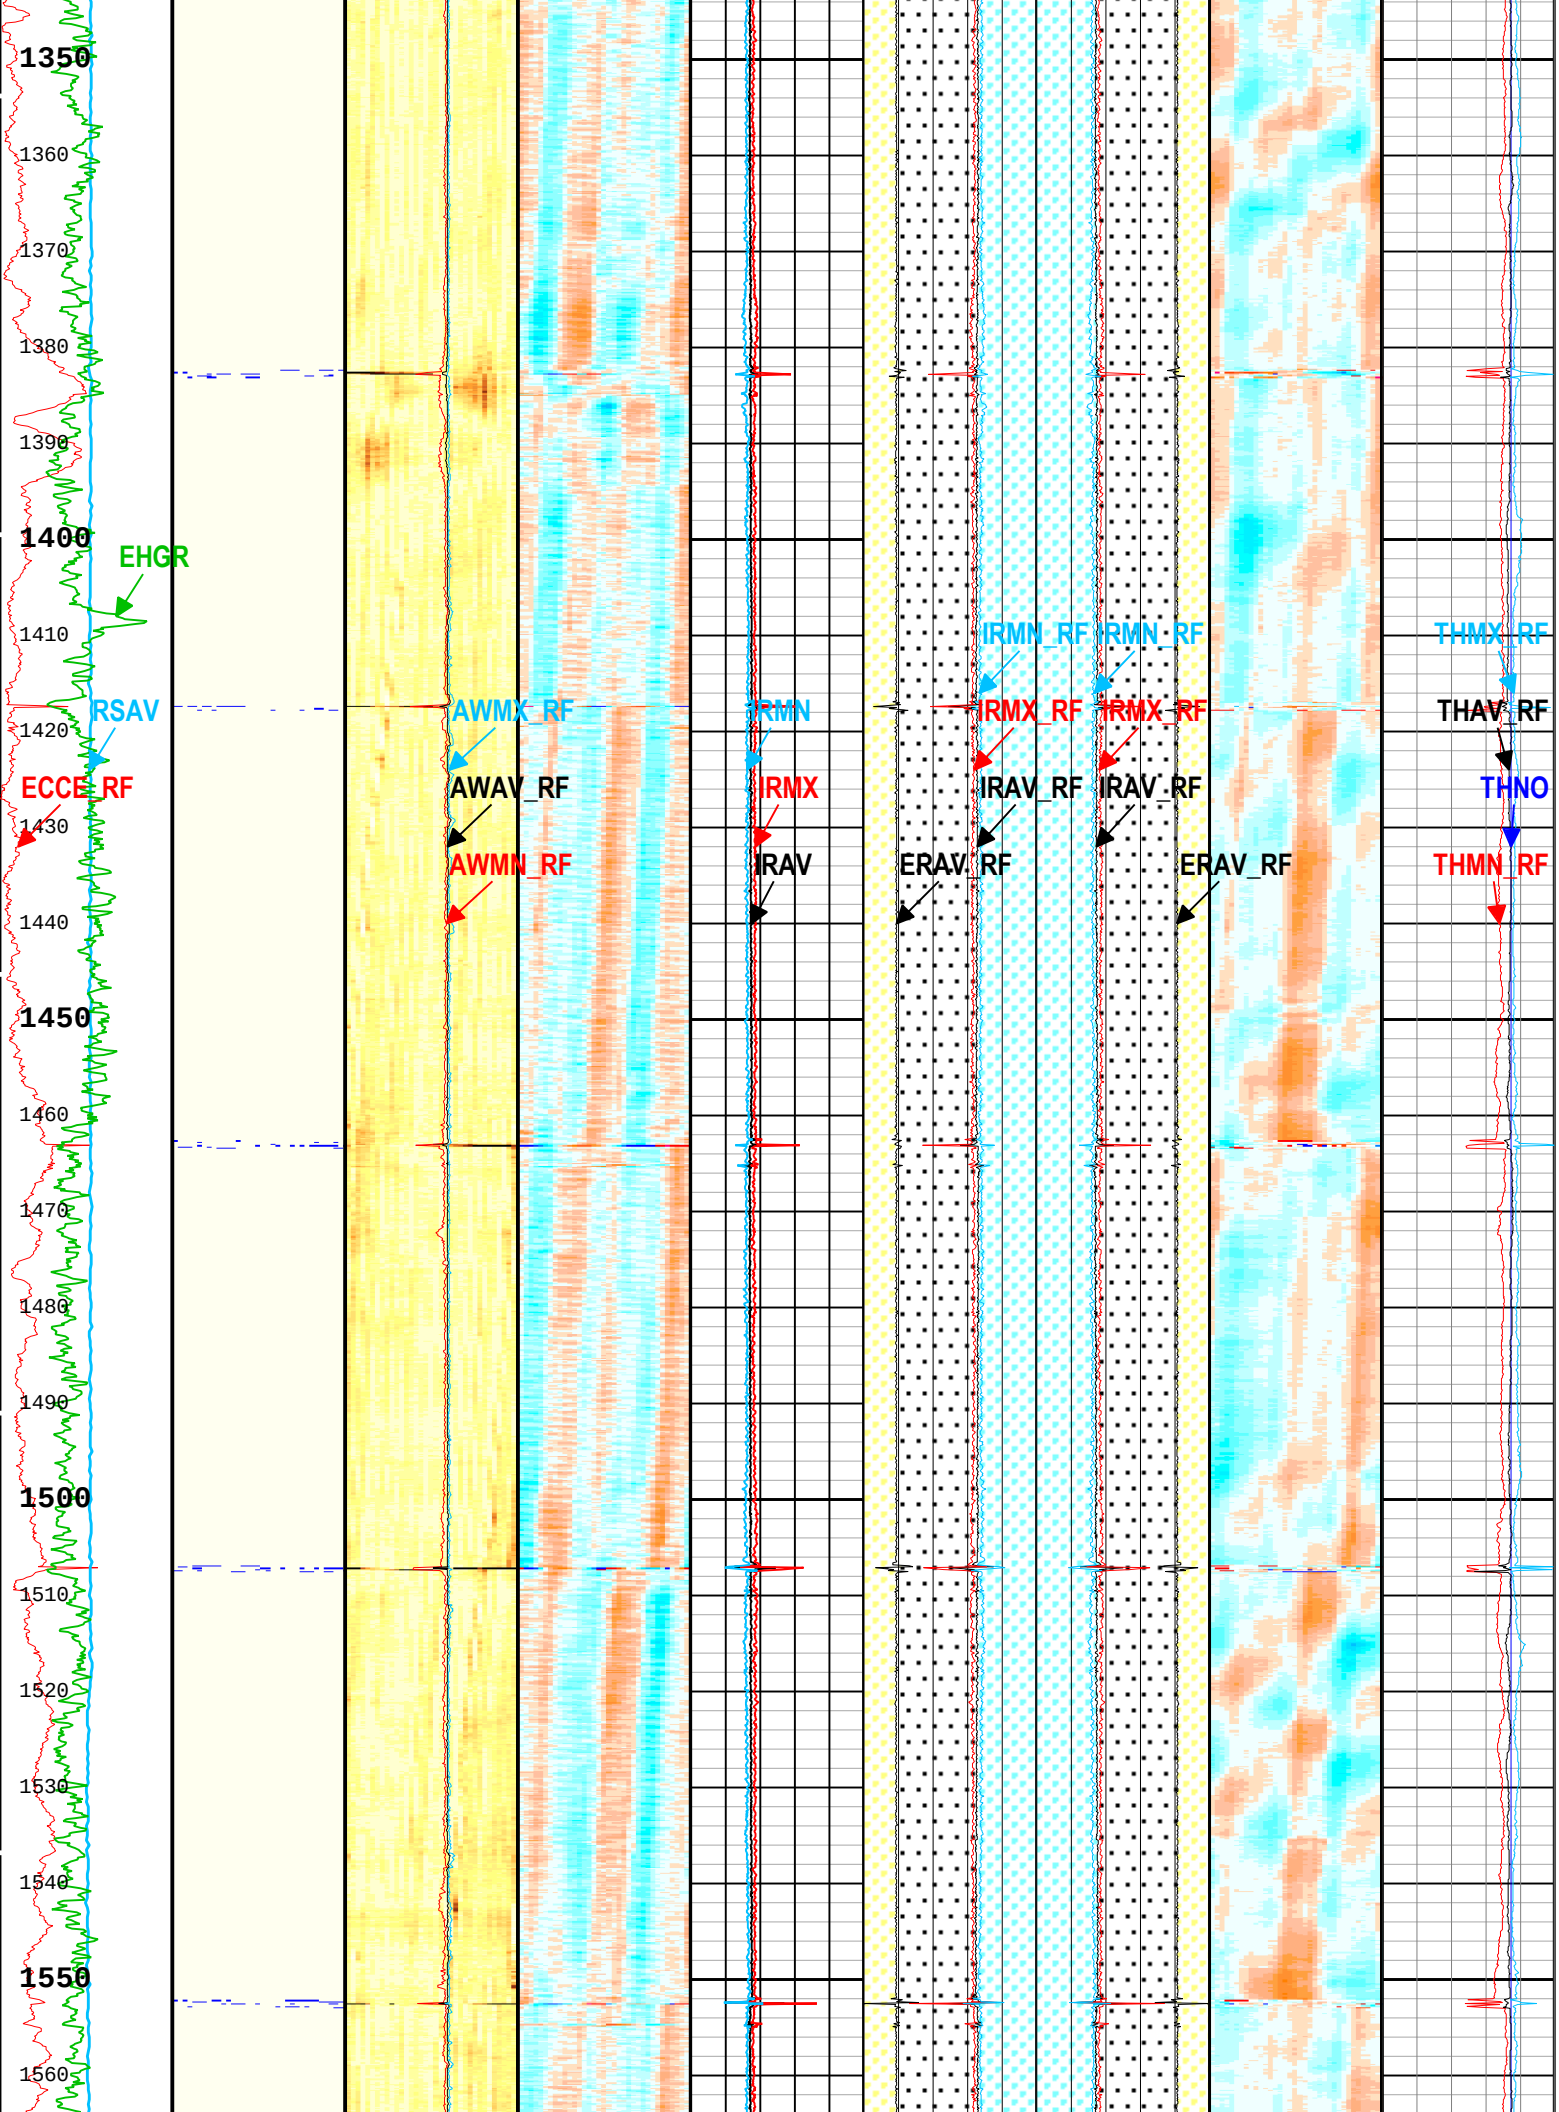
1350
1360
1370
1380
1390
1400
1410
1420
1430
1440
1450
1460
1470
1480
1490
1500
1510
1520
1530
1540
1550
1560
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

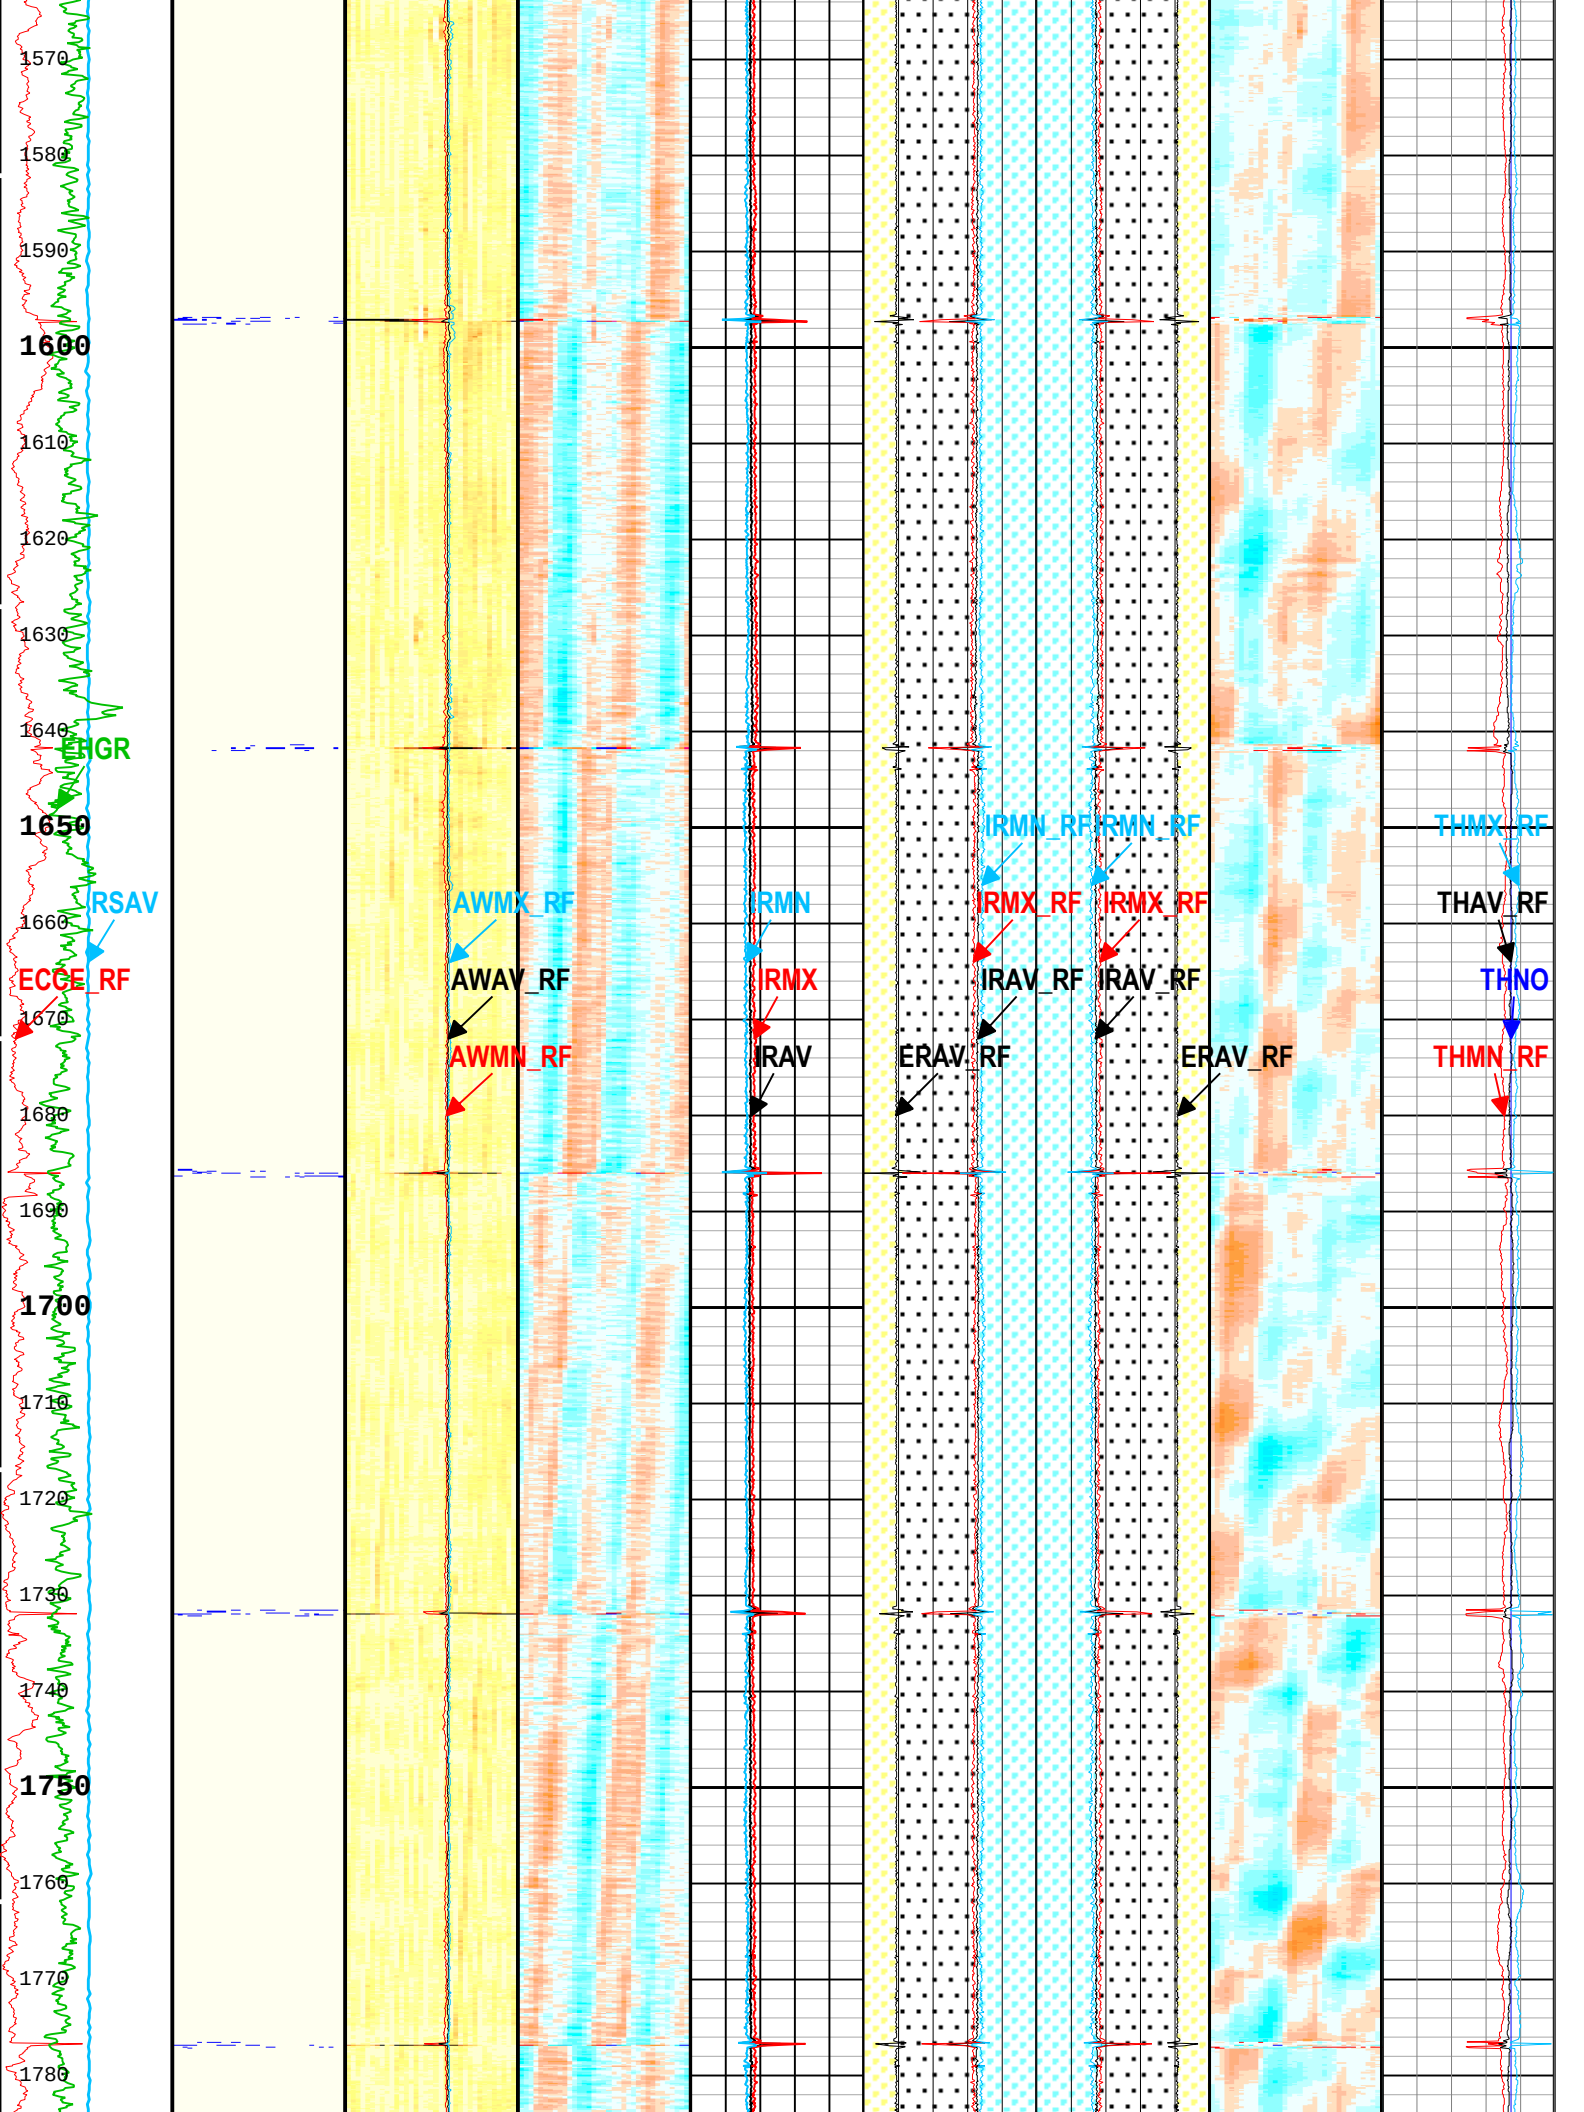
1570
1580
1590
1600
1610
1620
1630
1640
1650
1660
1670
1680
1690
1700
1710
1720
1730
1740
1750
1760
1770
1780
THGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

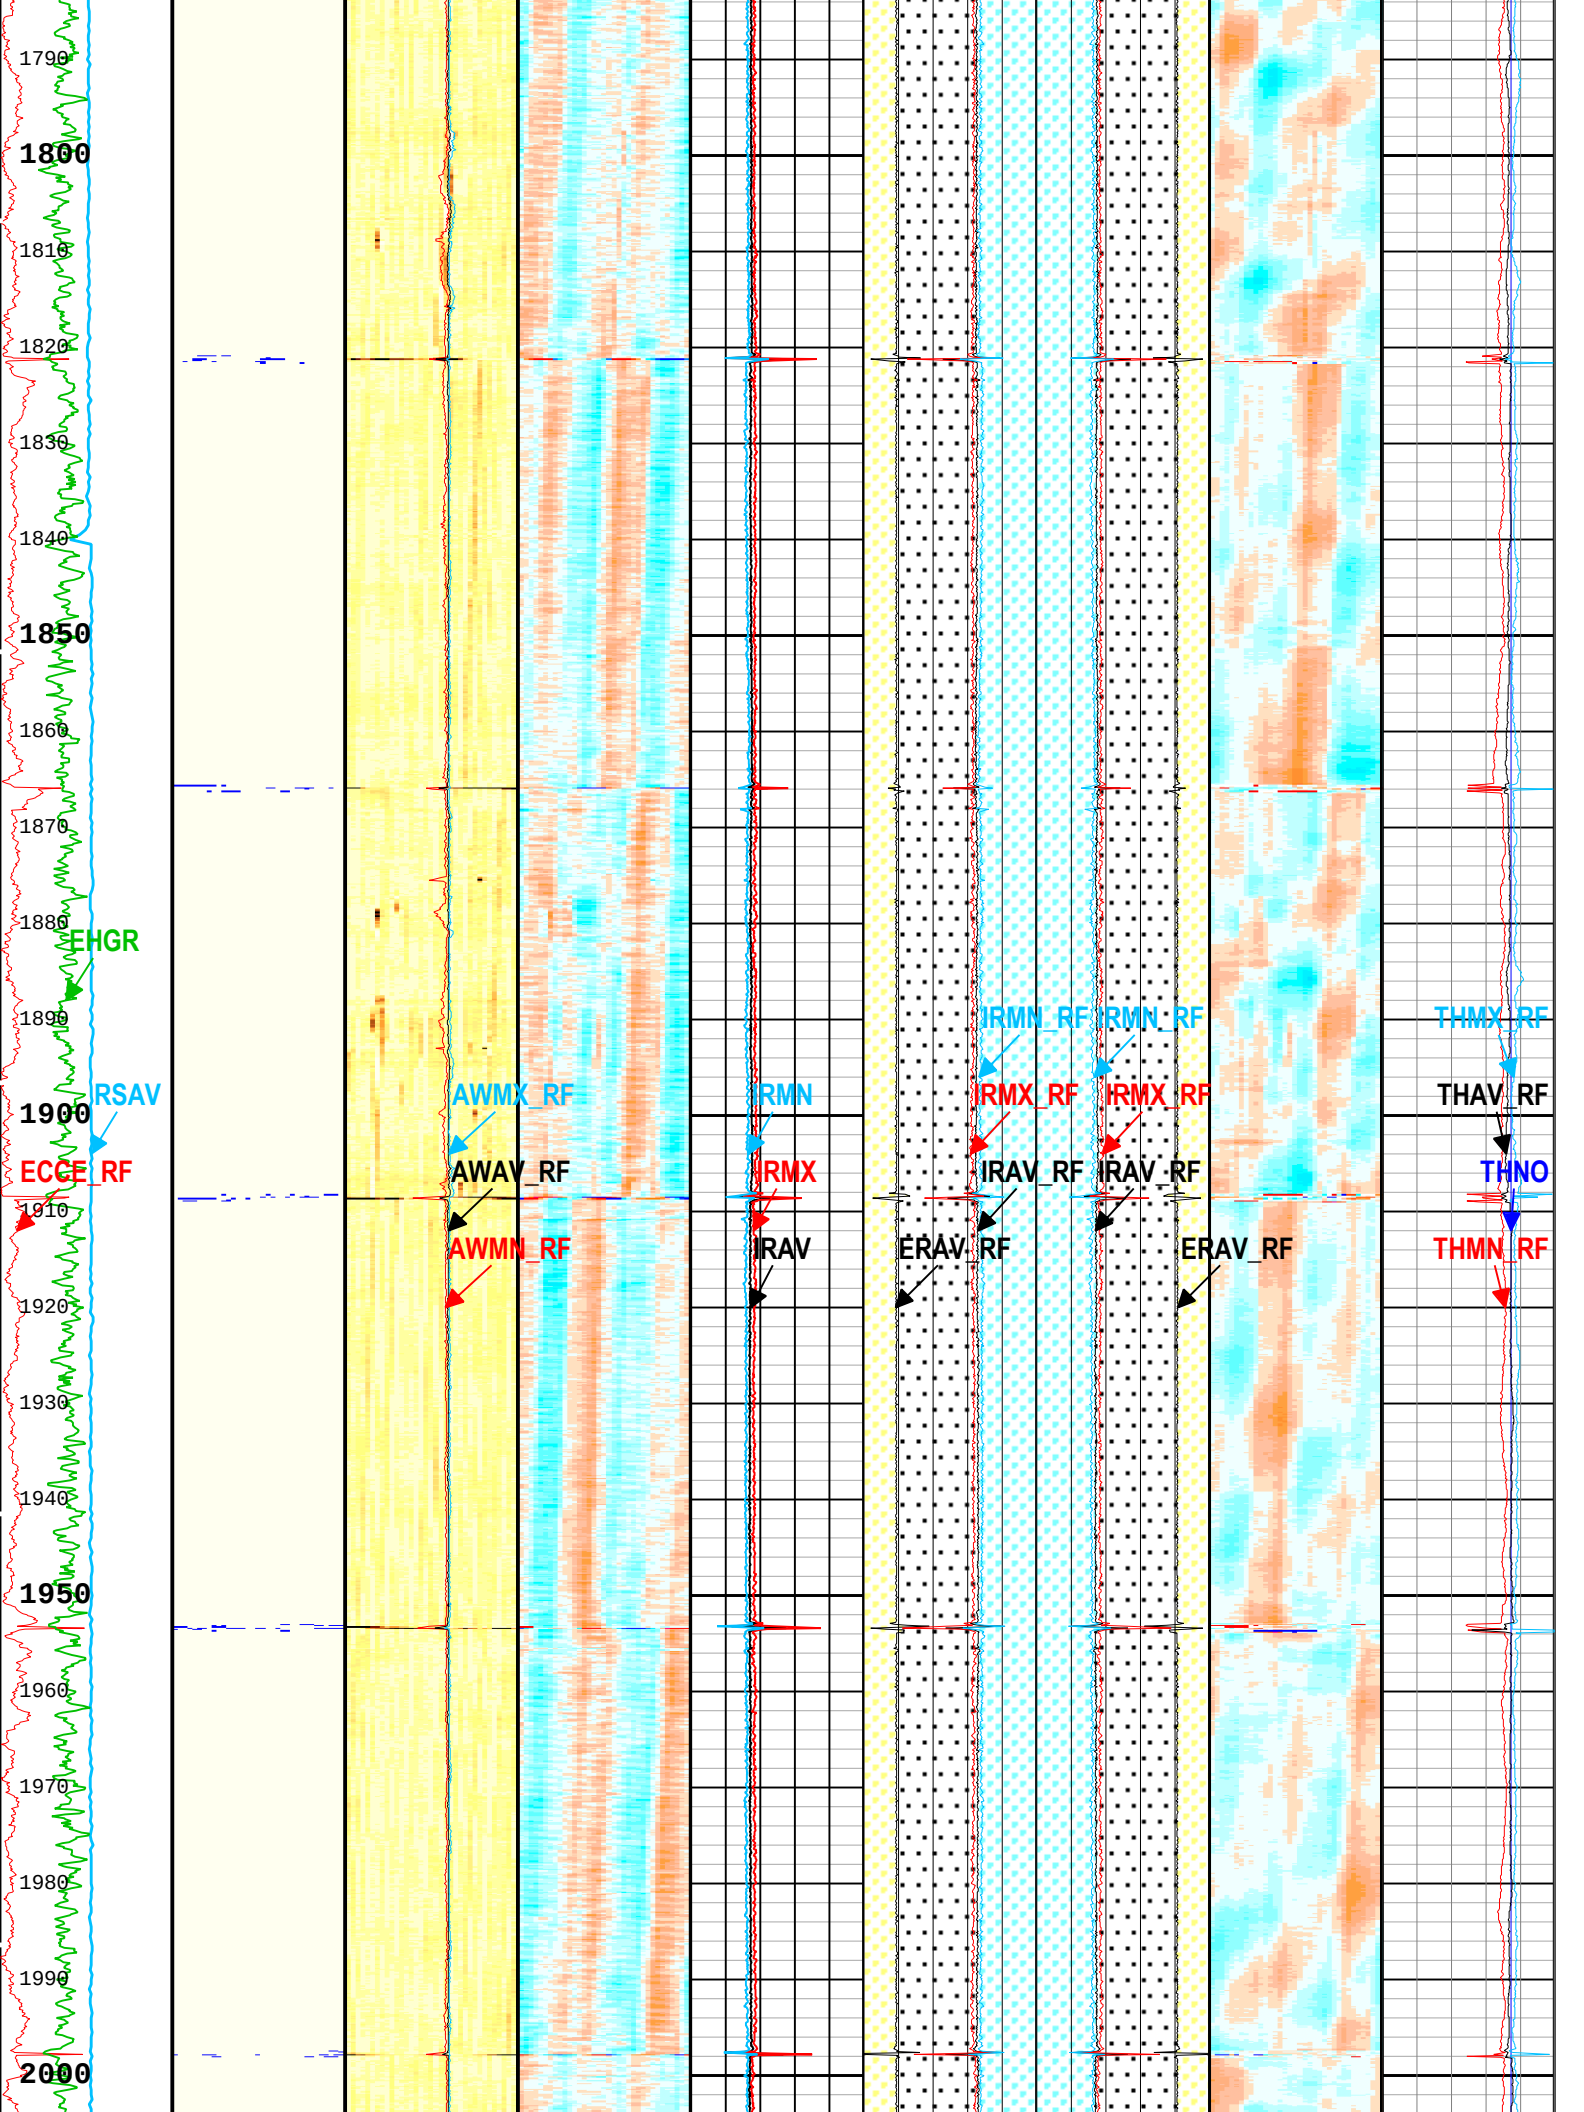
1790
1800
1810
1820
1830
1840
1850
1860
1870
1880
1890
1900
1910
1920
1930
1940
1950
1960
1970
1980
1990
2000
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
RMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

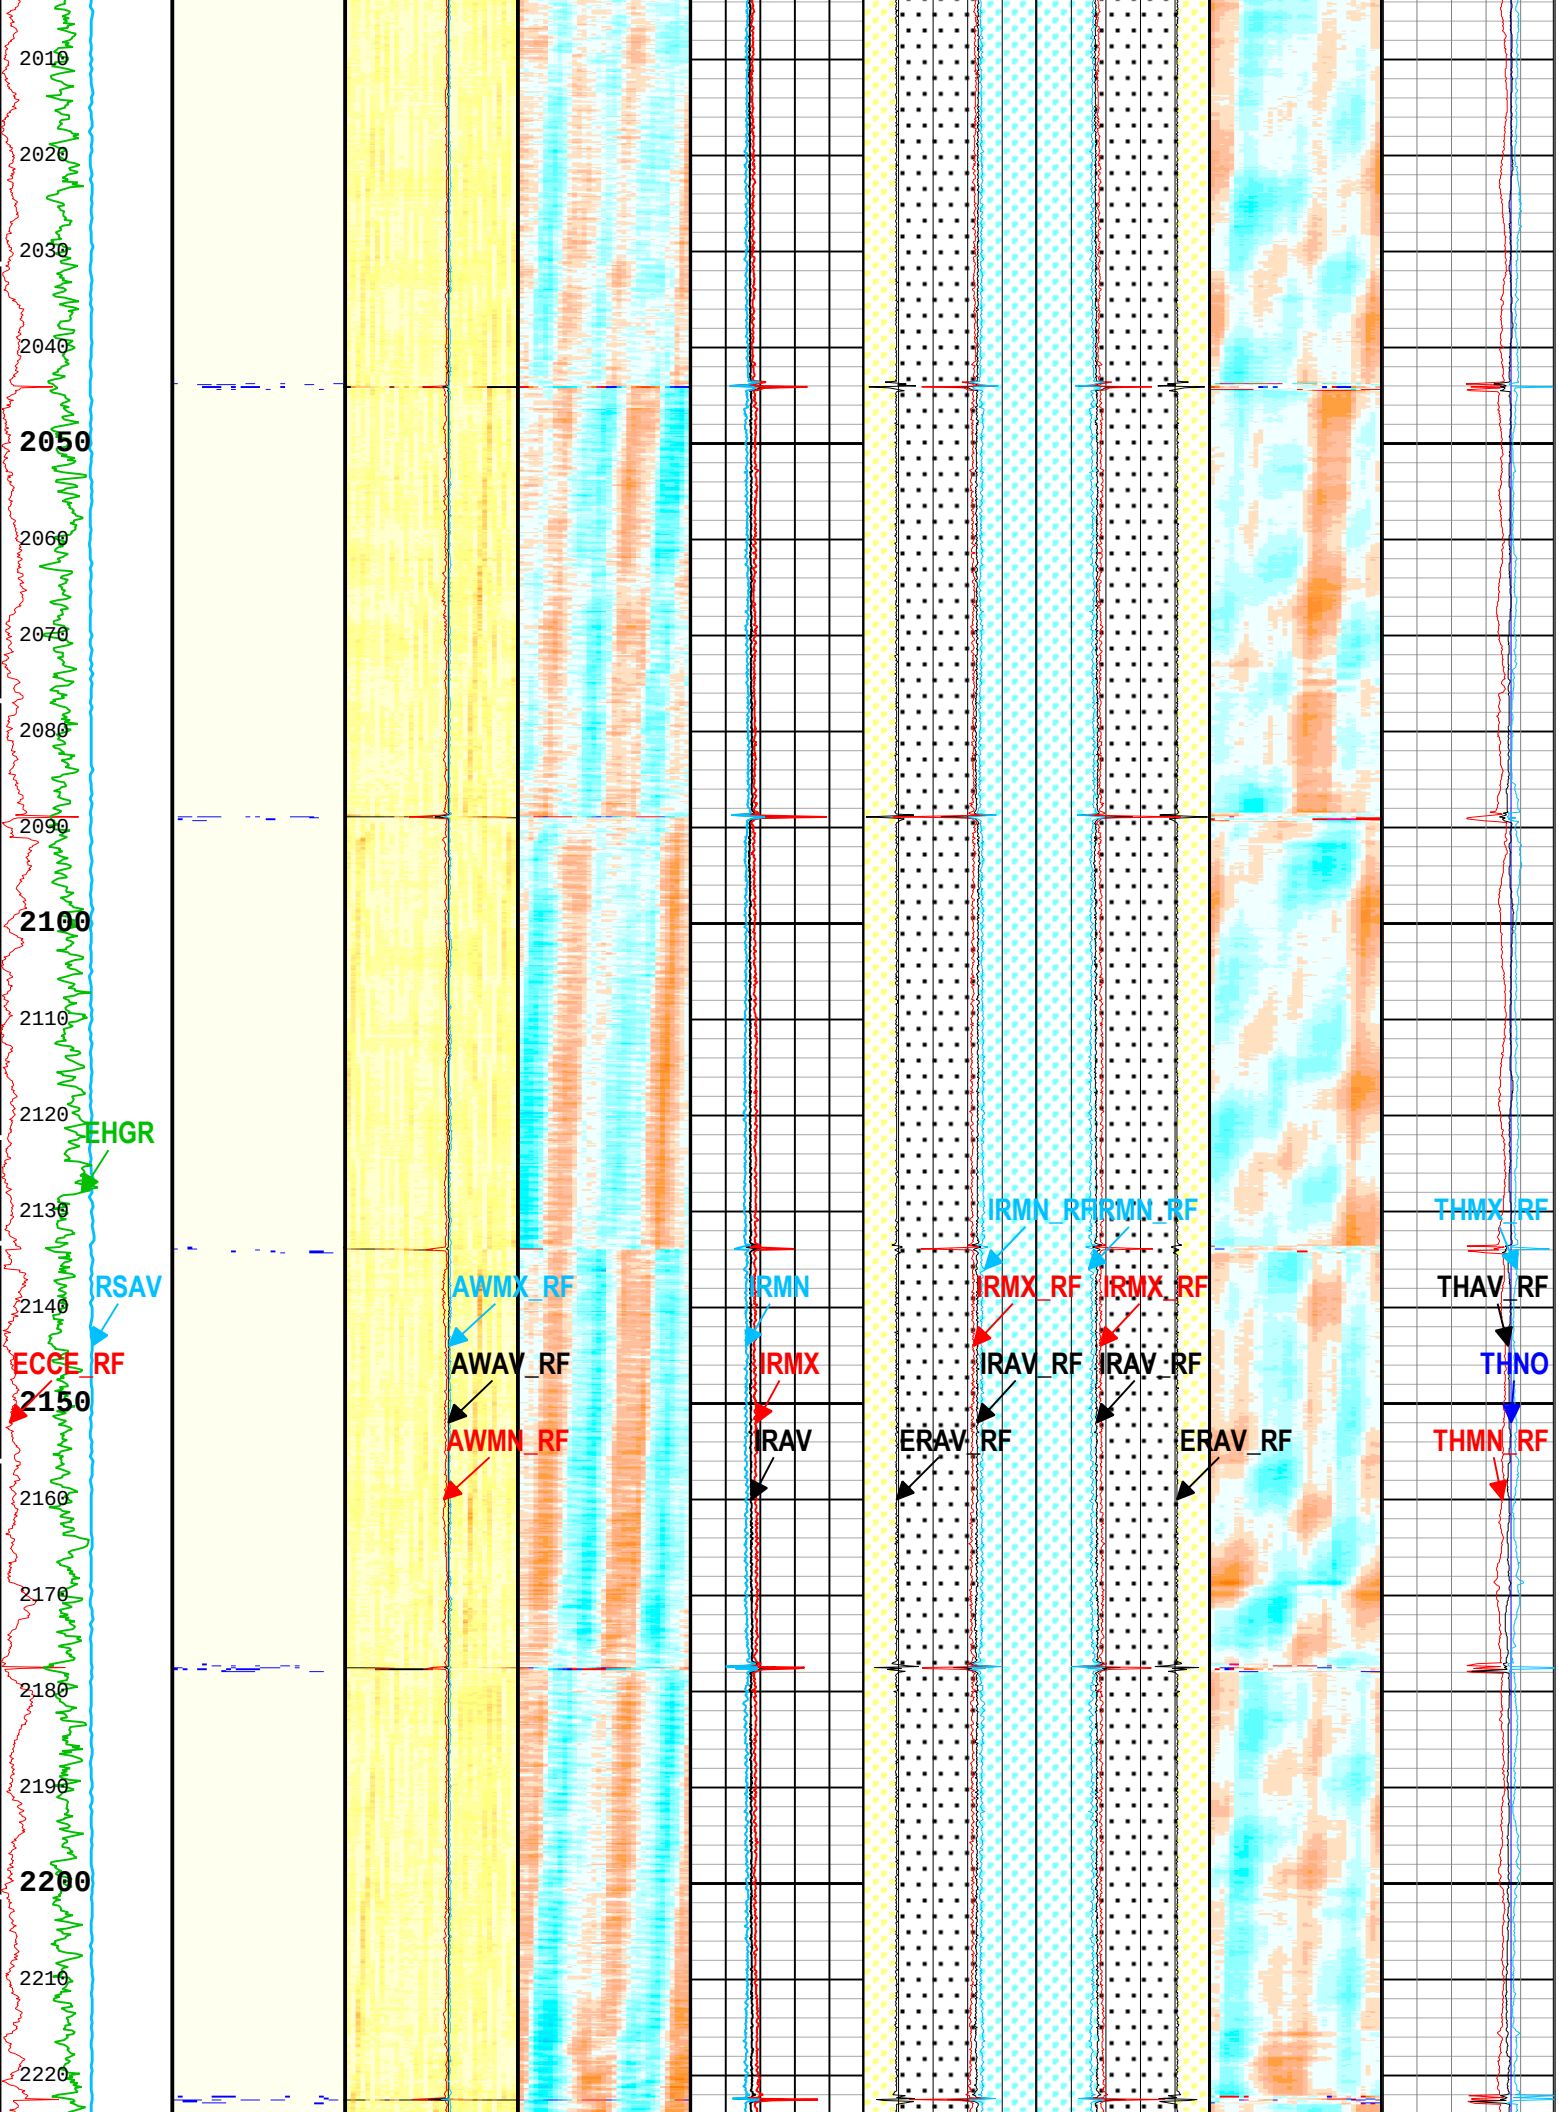
2010
2020
2030
2040
2050
2060
2070
2080
2090
2100
2110
2120
2130
2140
2150
2160
2170
2180
2190
2200
2210
2220
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

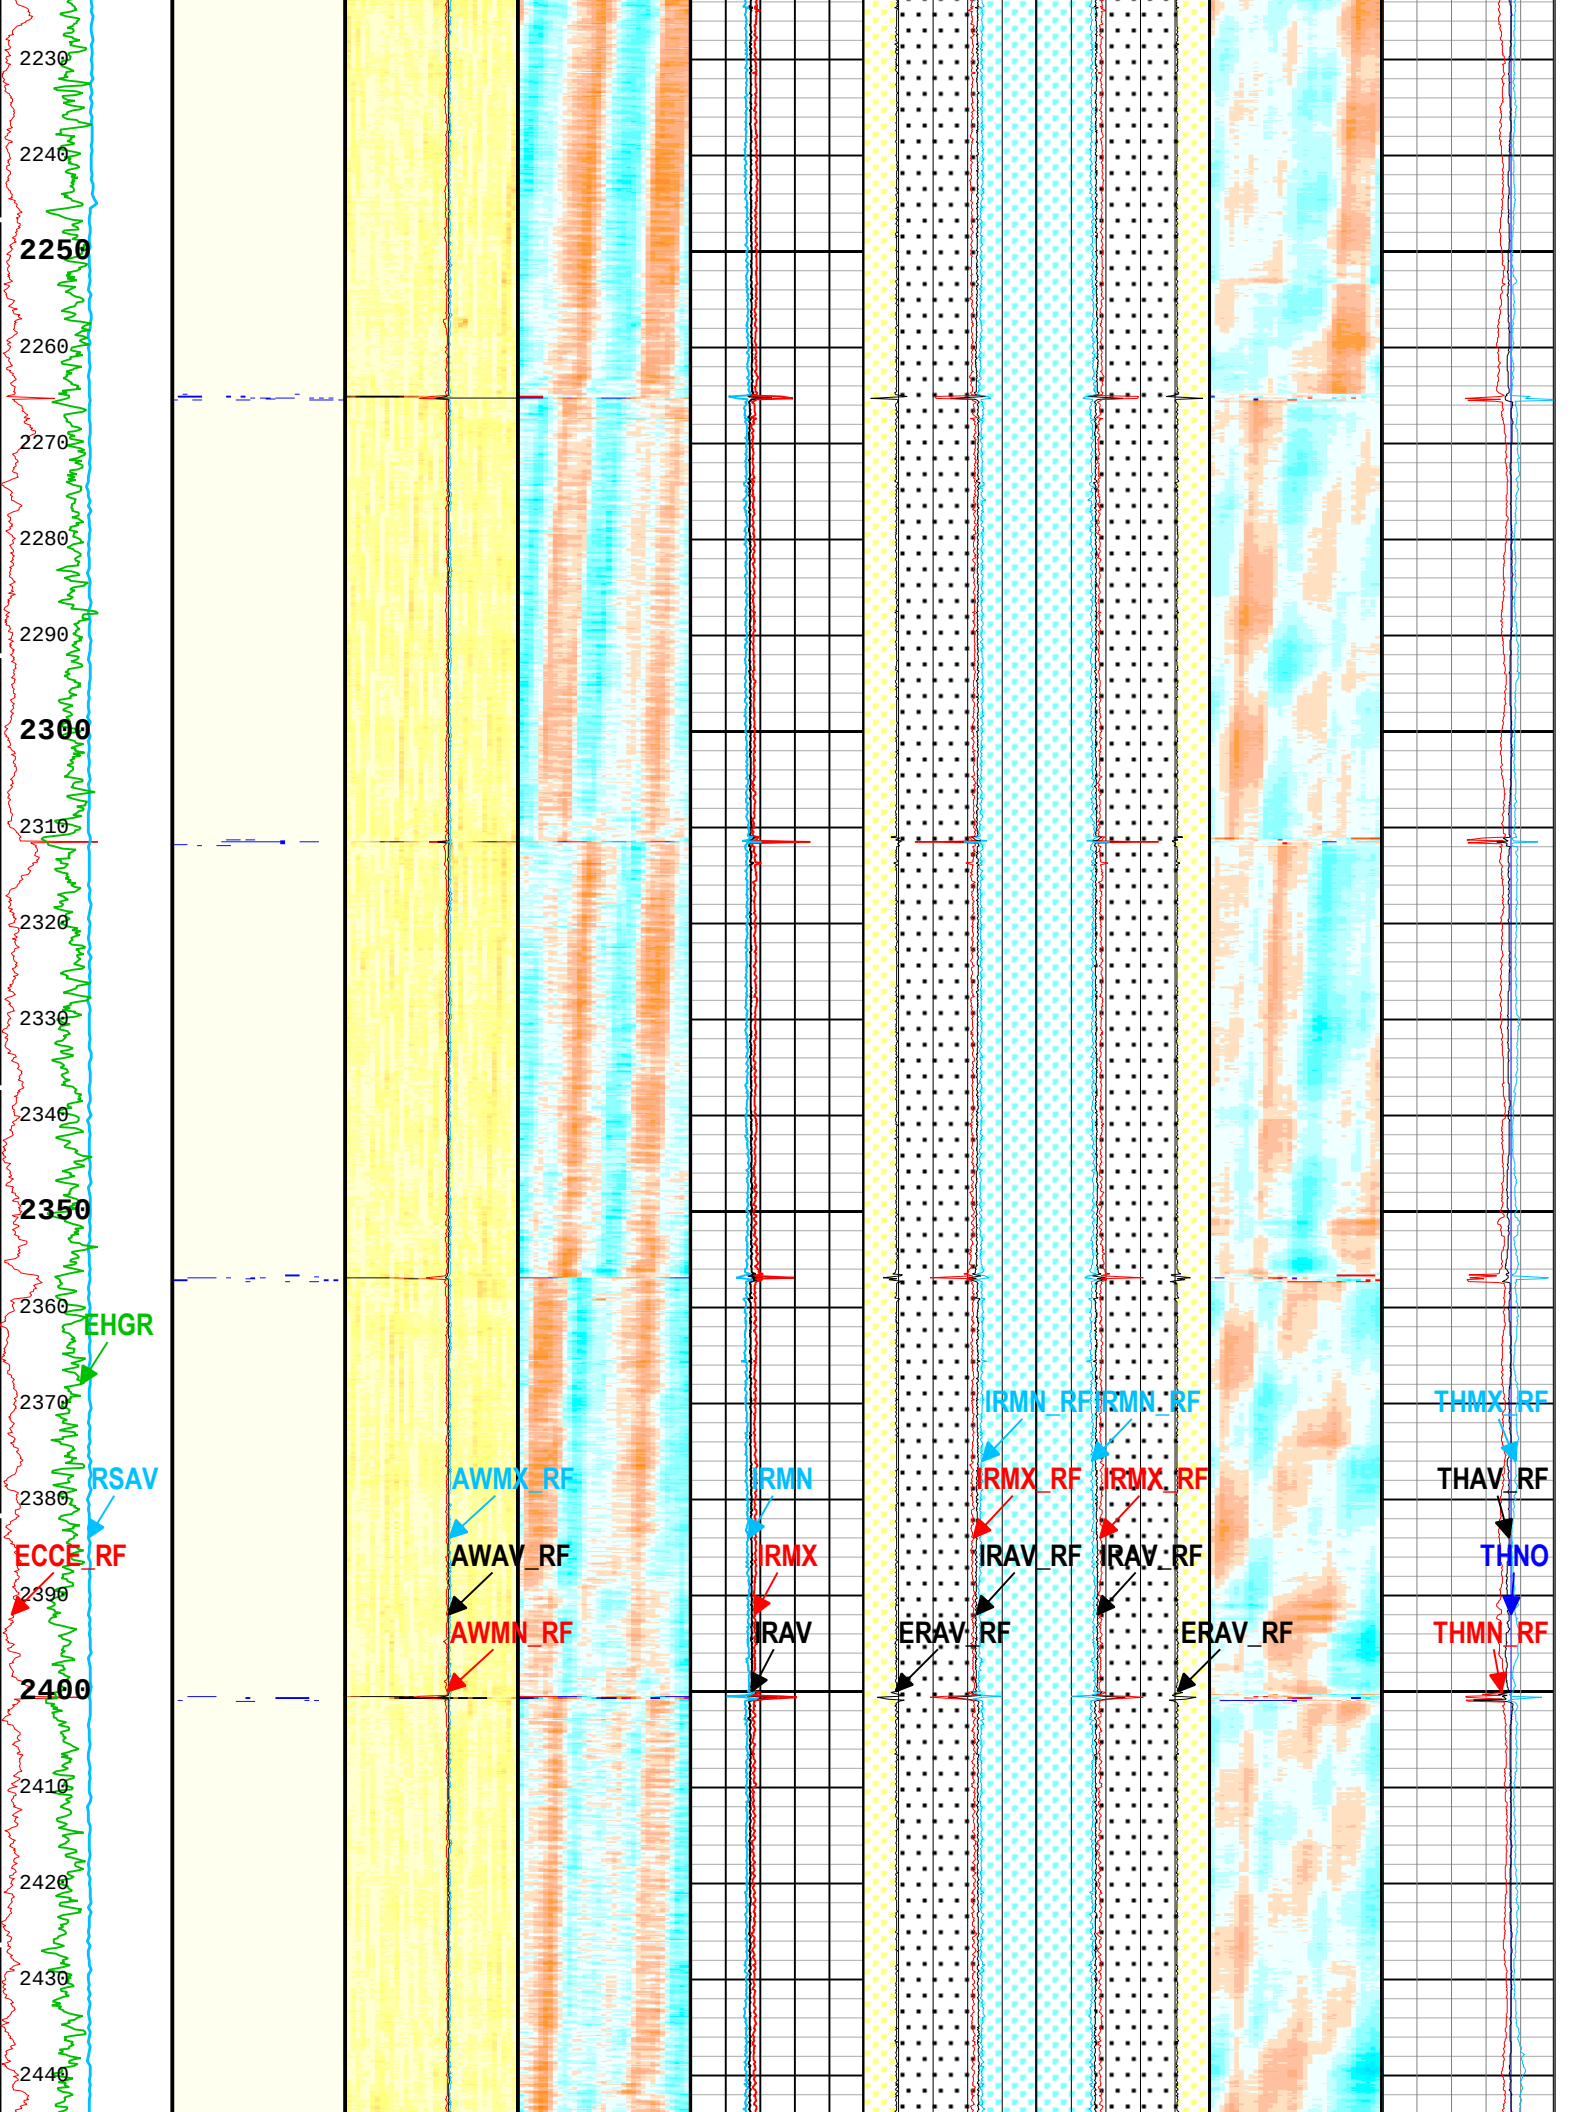
2230
2240
2250
2260
2270
2280
2290
2300
2310
2320
2330
2340
2350
2360
2370
2380
2390
2400
2410
2420
2430
2440
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

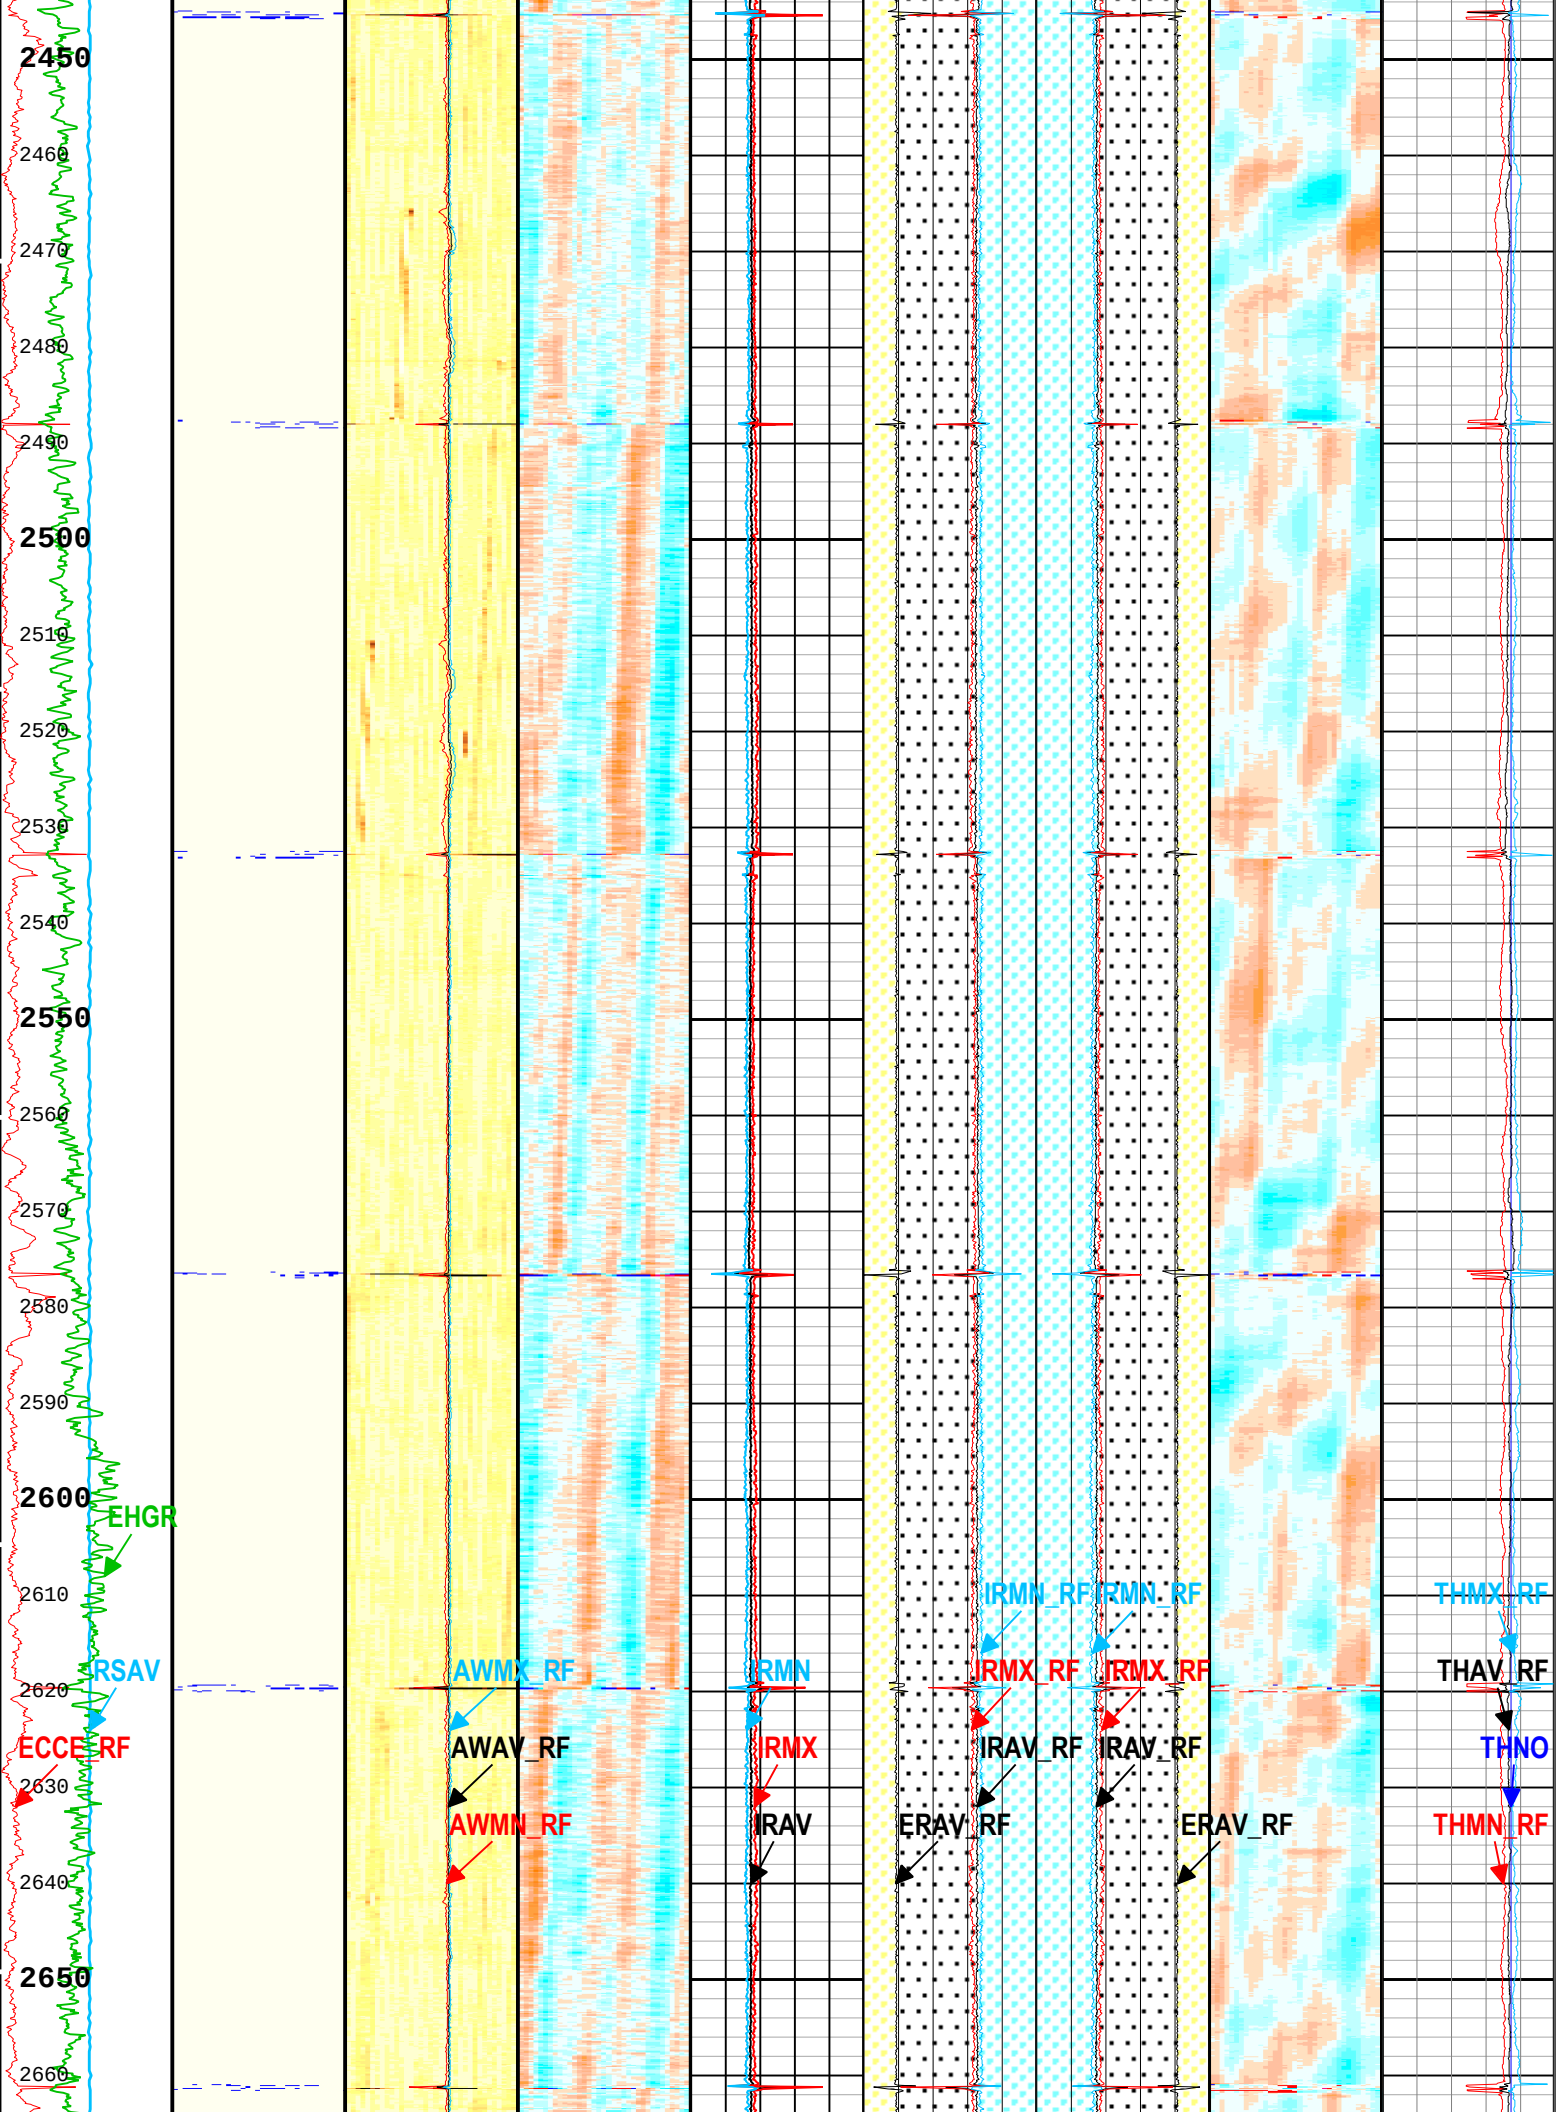
2450
2460
2470
2480
2490
2500
2510
2520
2530
2540
2550
2560
2570
2580
2590
2600
2610
2620
2630
2640
2650
2660
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

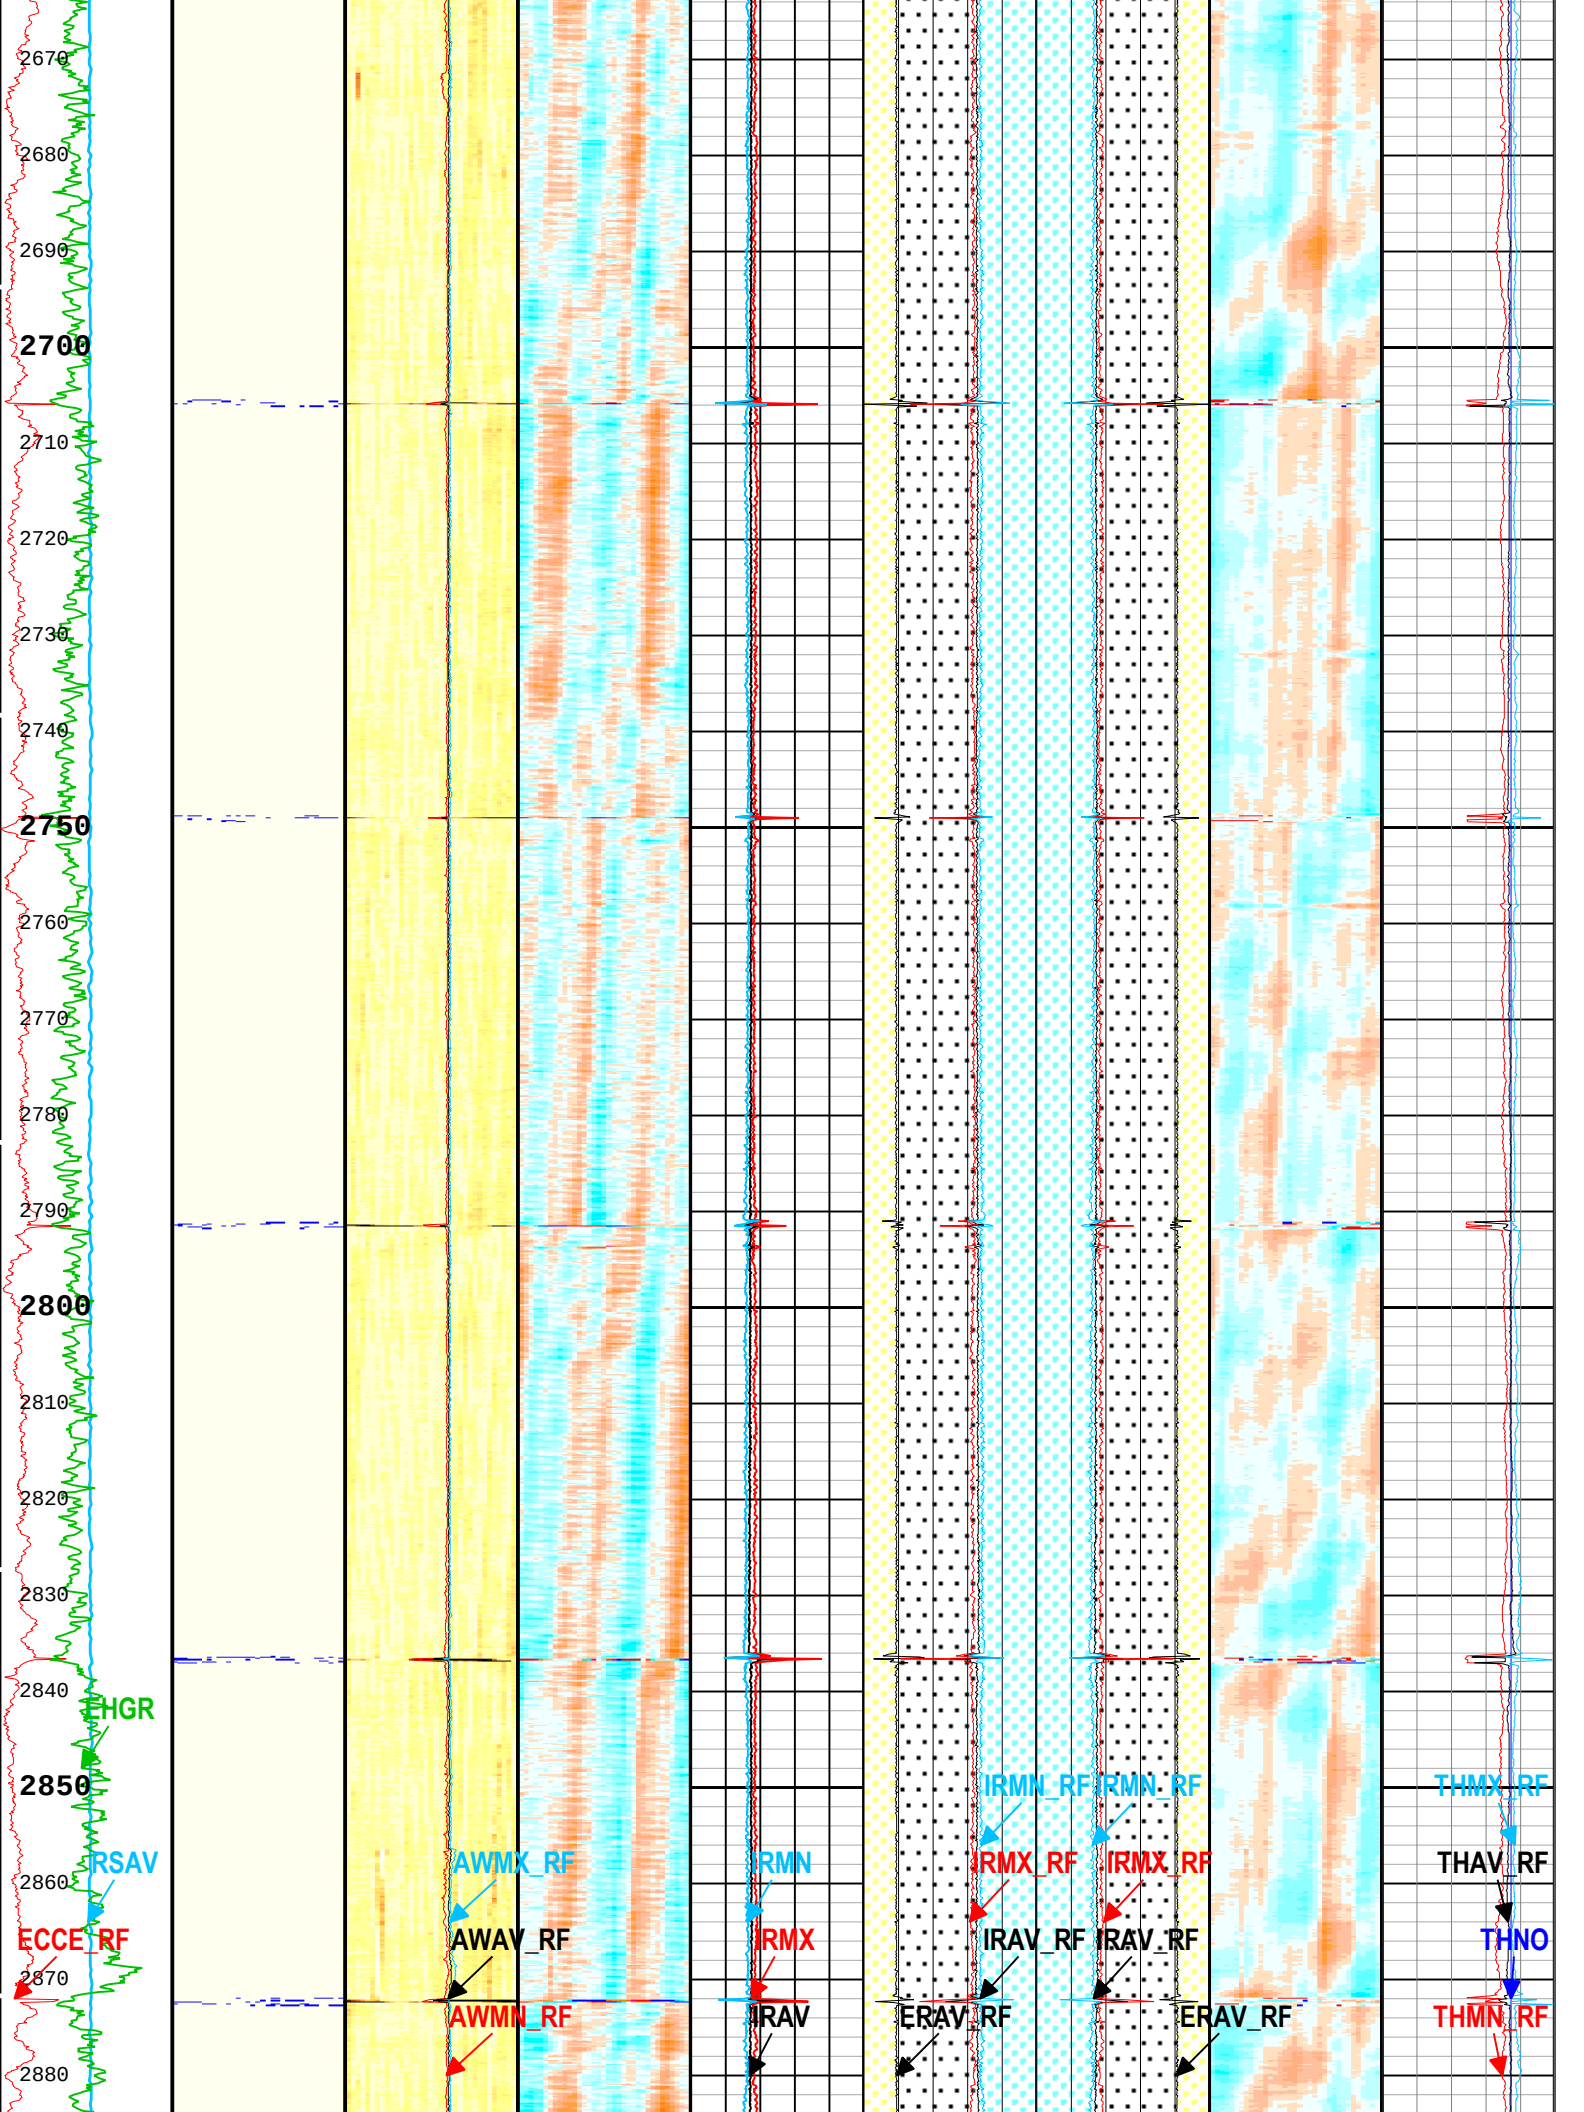
2670
2680
2690
2700
2710
2720
2730
2740
2750
2760
2770
2780
2790
2800
2810
2820
2830
2840
2850
2860
2870
2880
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
RMN
RMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

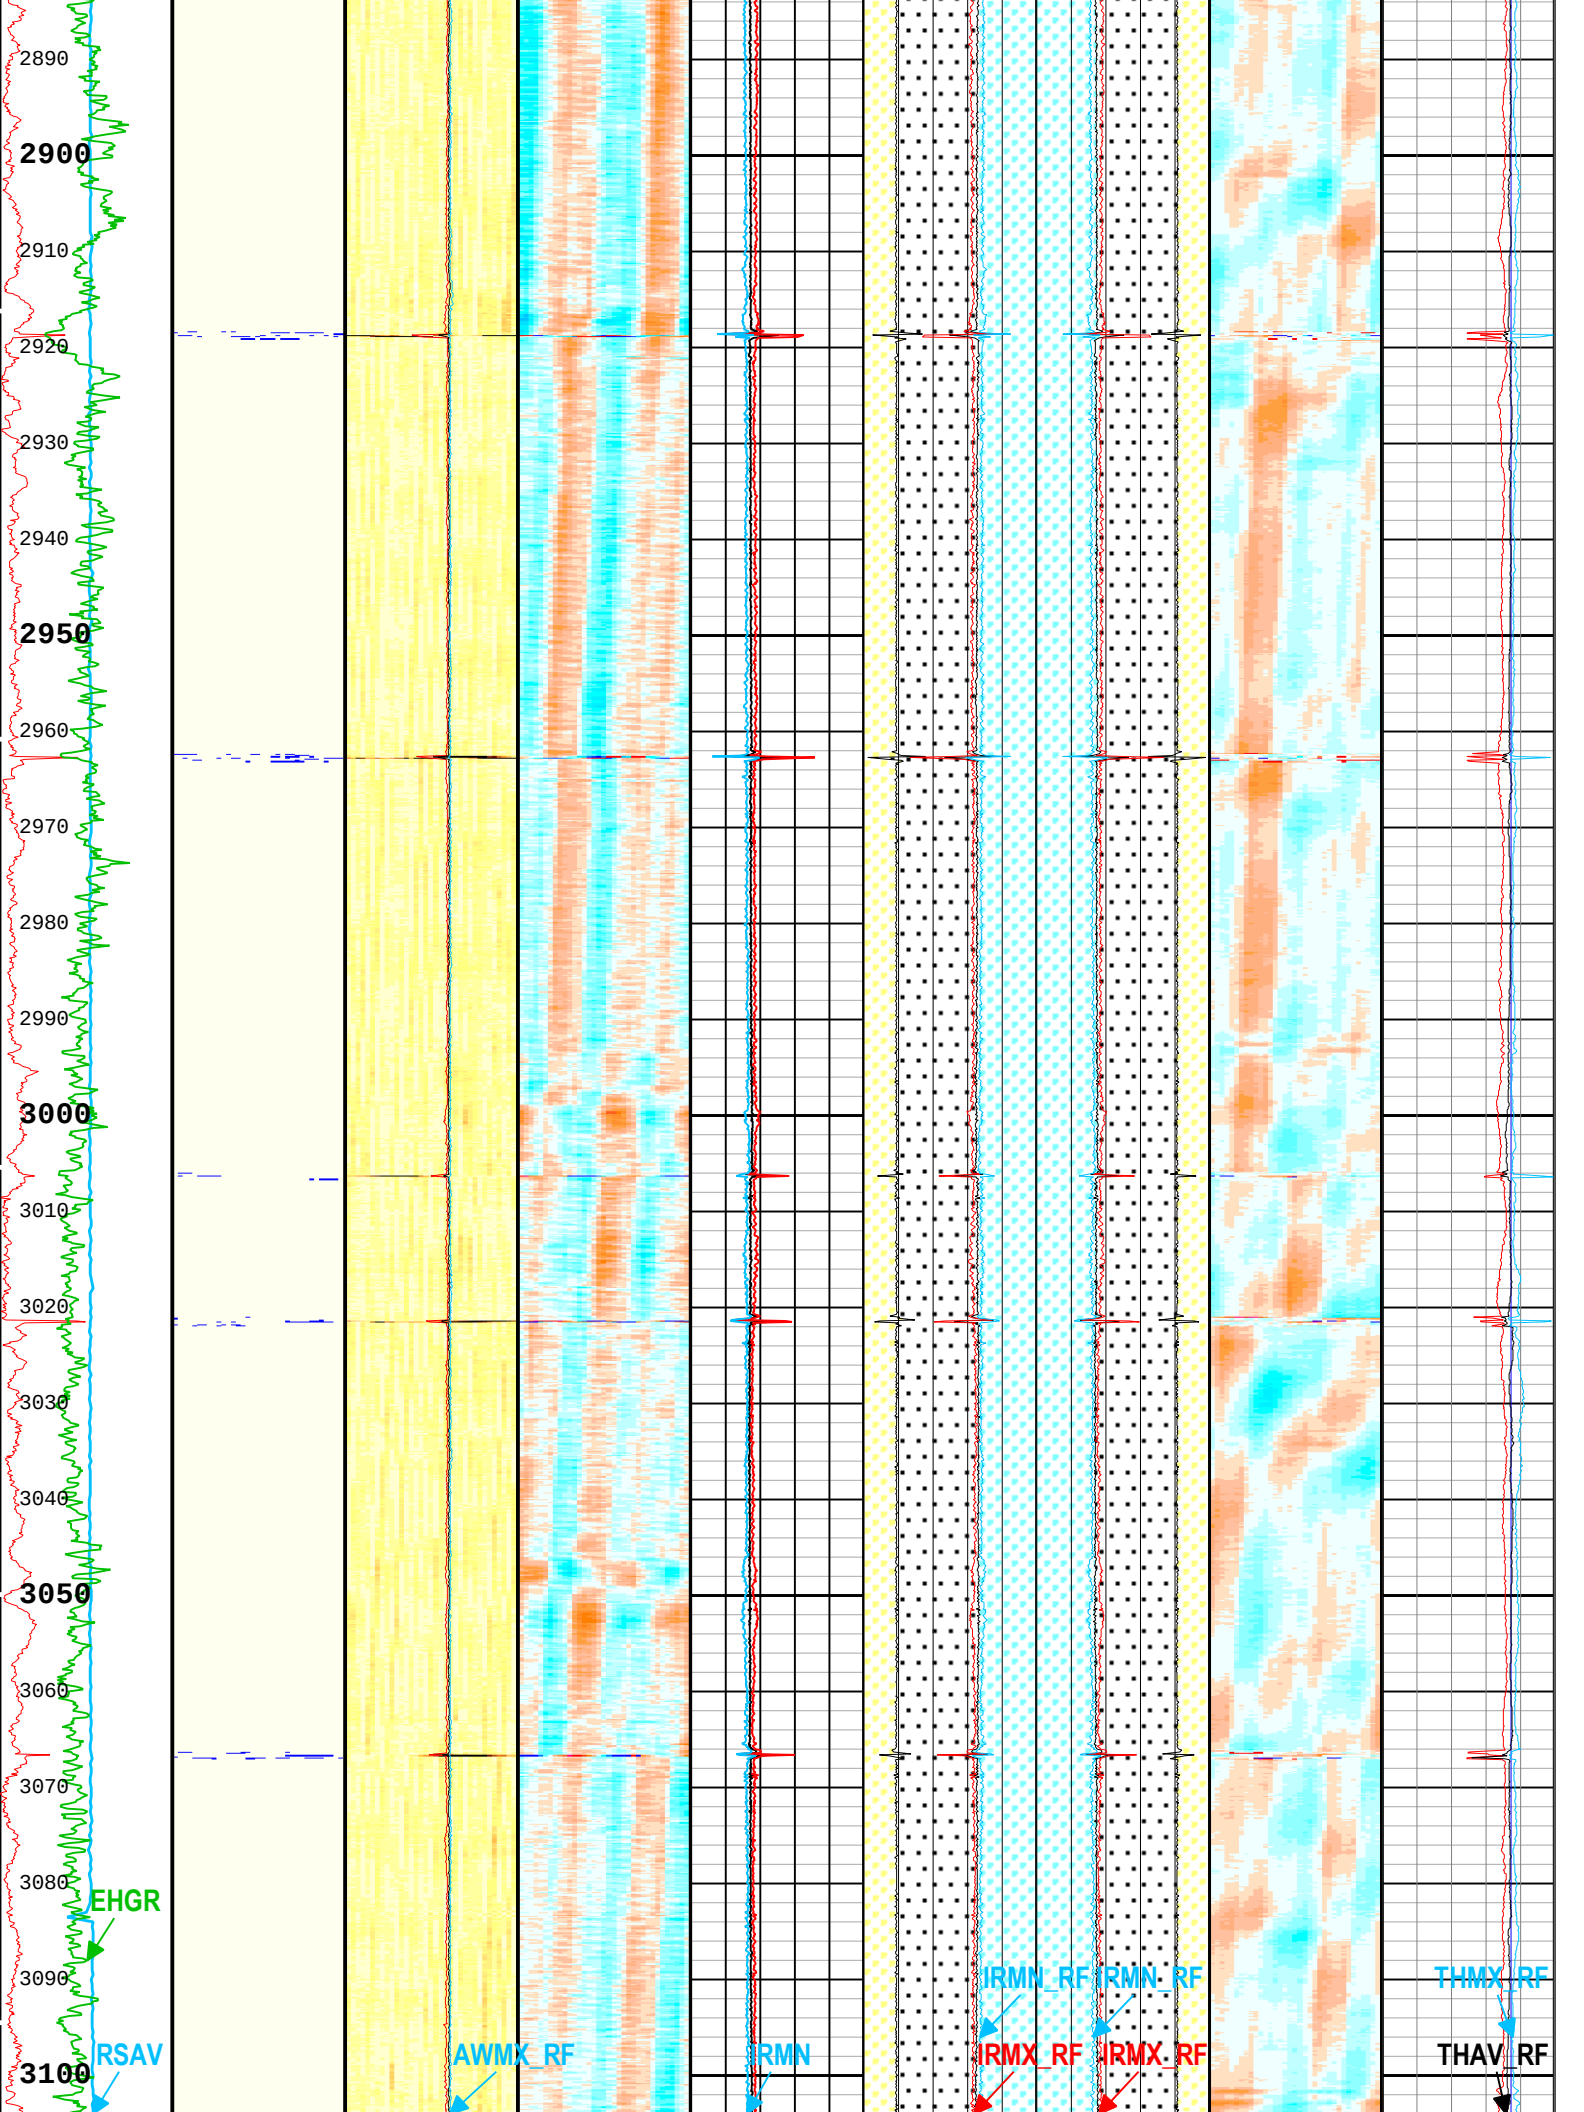
2890
2900
2910
2920
2930
2940
2950
2960
2970
2980
2990
3000
3010
3020
3030
3040
3050
3060
3070
3080
3090
3100
EHGR
RSAV
AWMX_RF
IRMN
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
THMX_RF
THAV_RF

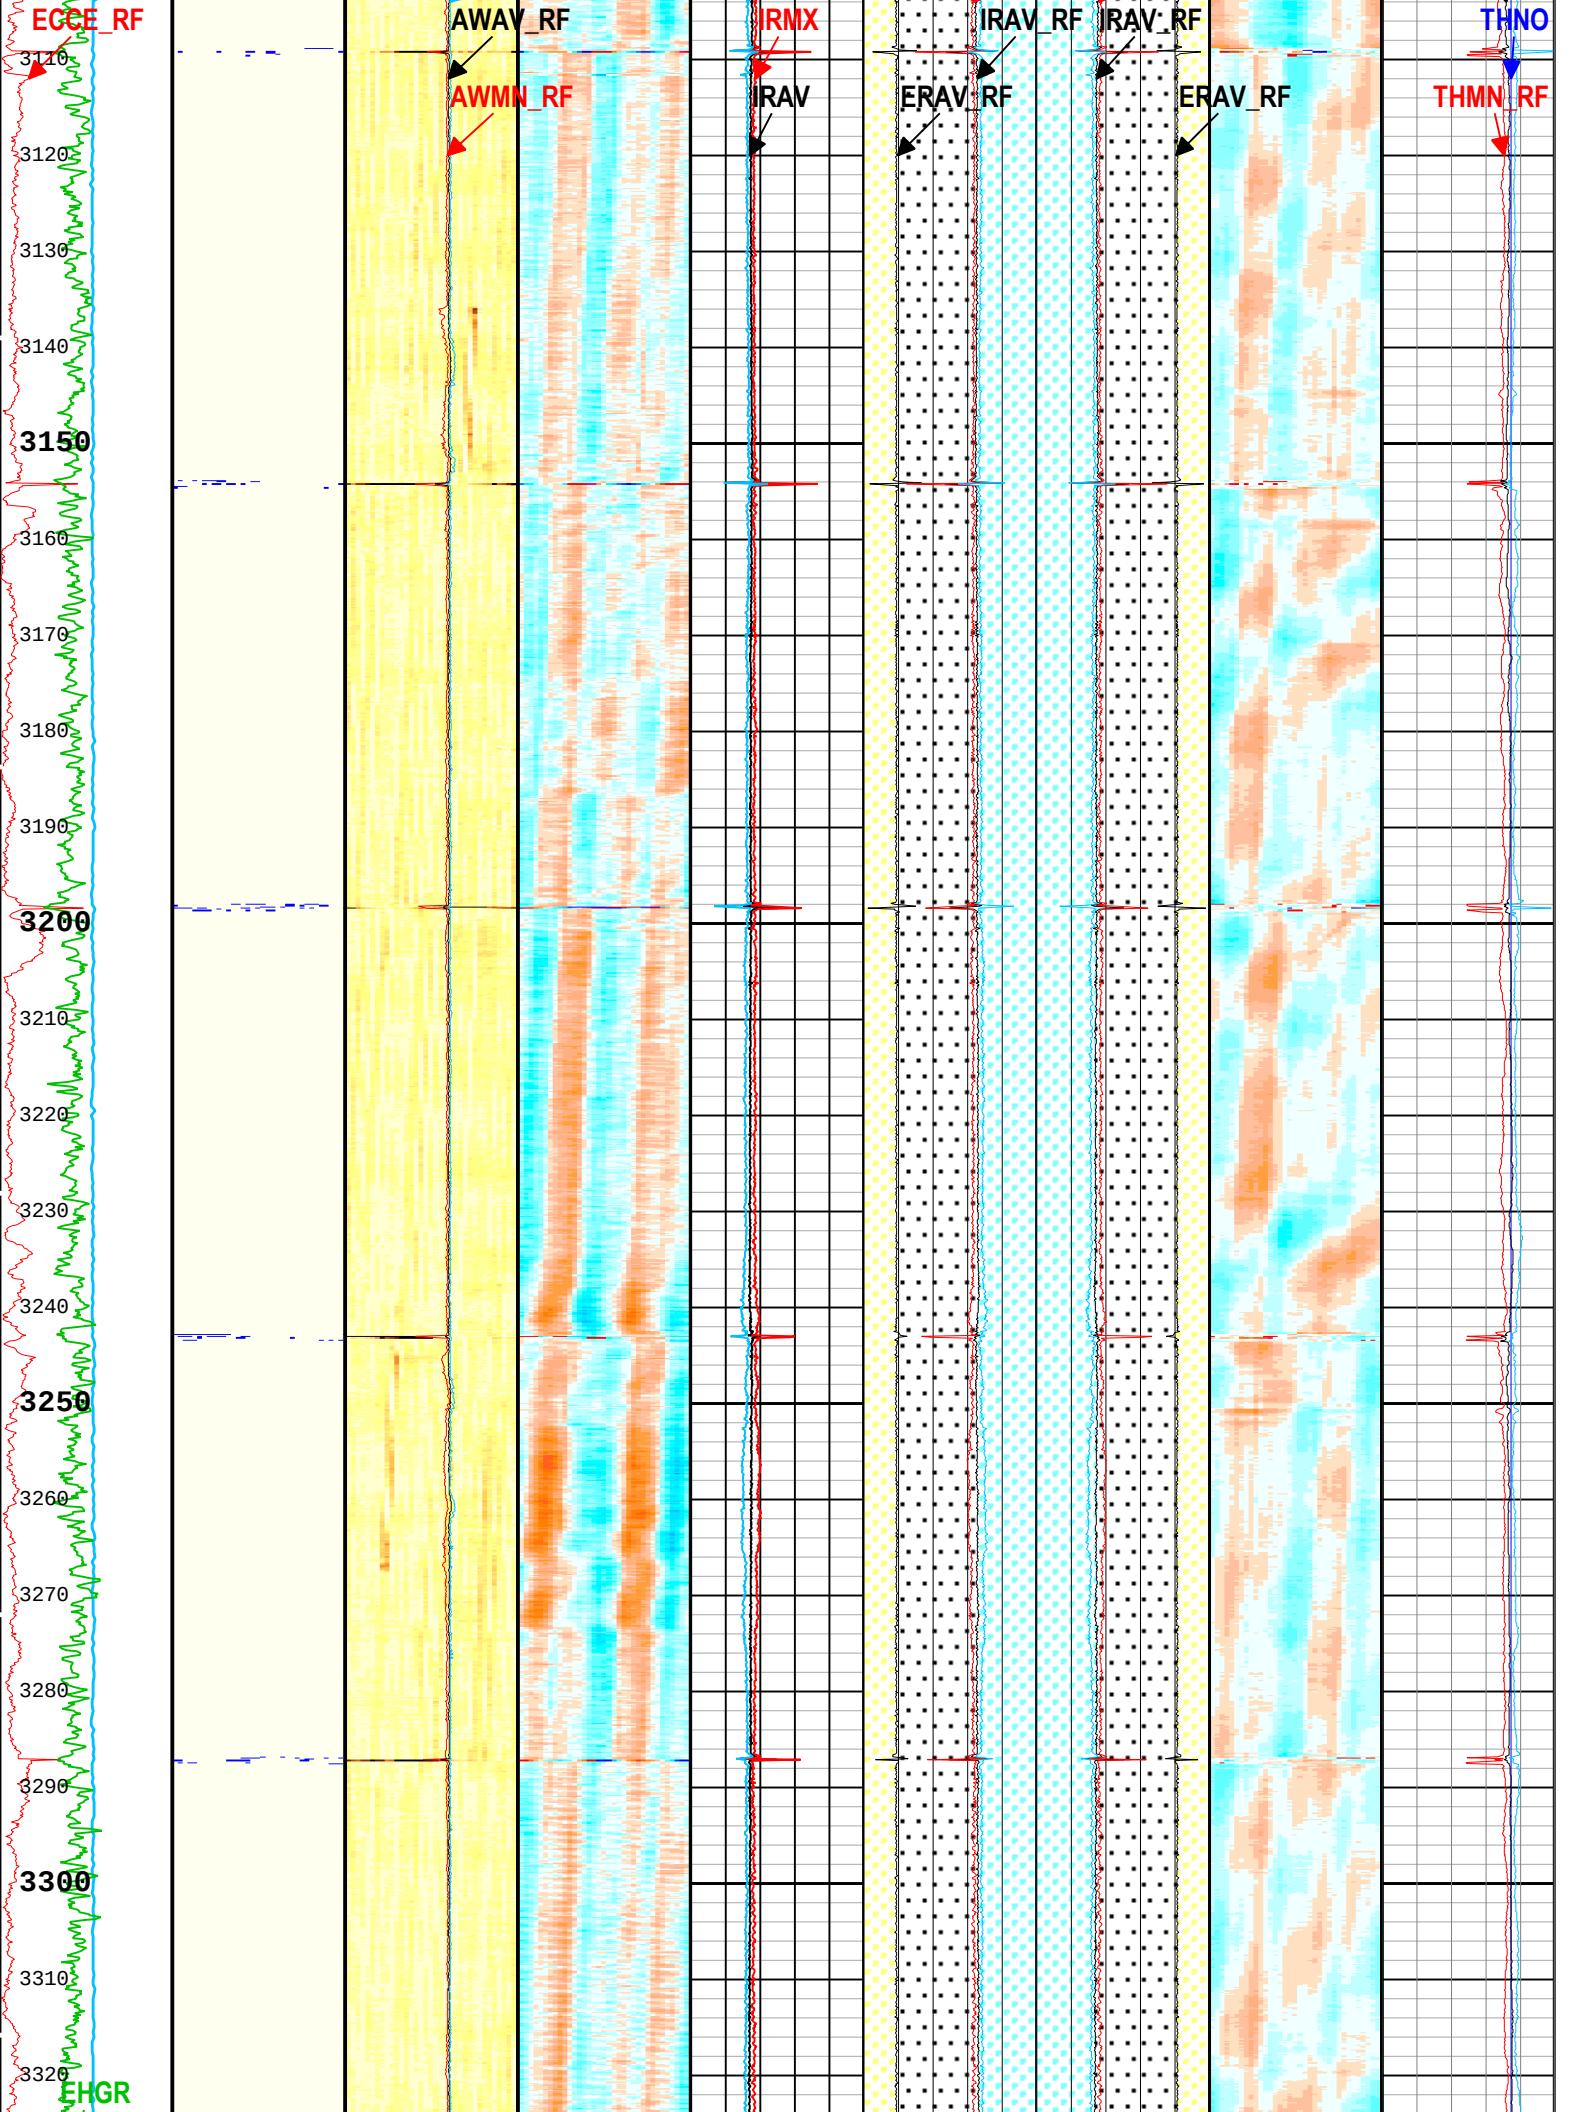
ECCE_RF
AWAV_RF
AWMN_RF
IRMX
IRAV
IRAV_RF
ERAV_RF
IRAV_RF
ERAV_RF
THNO
THMN_RF
3110
3120
3130
3140
3150
3160
3170
3180
3190
3200
3210
3220
3230
3240
3250
3260
3270
3280
3290
3300
3310
3320
EHGR

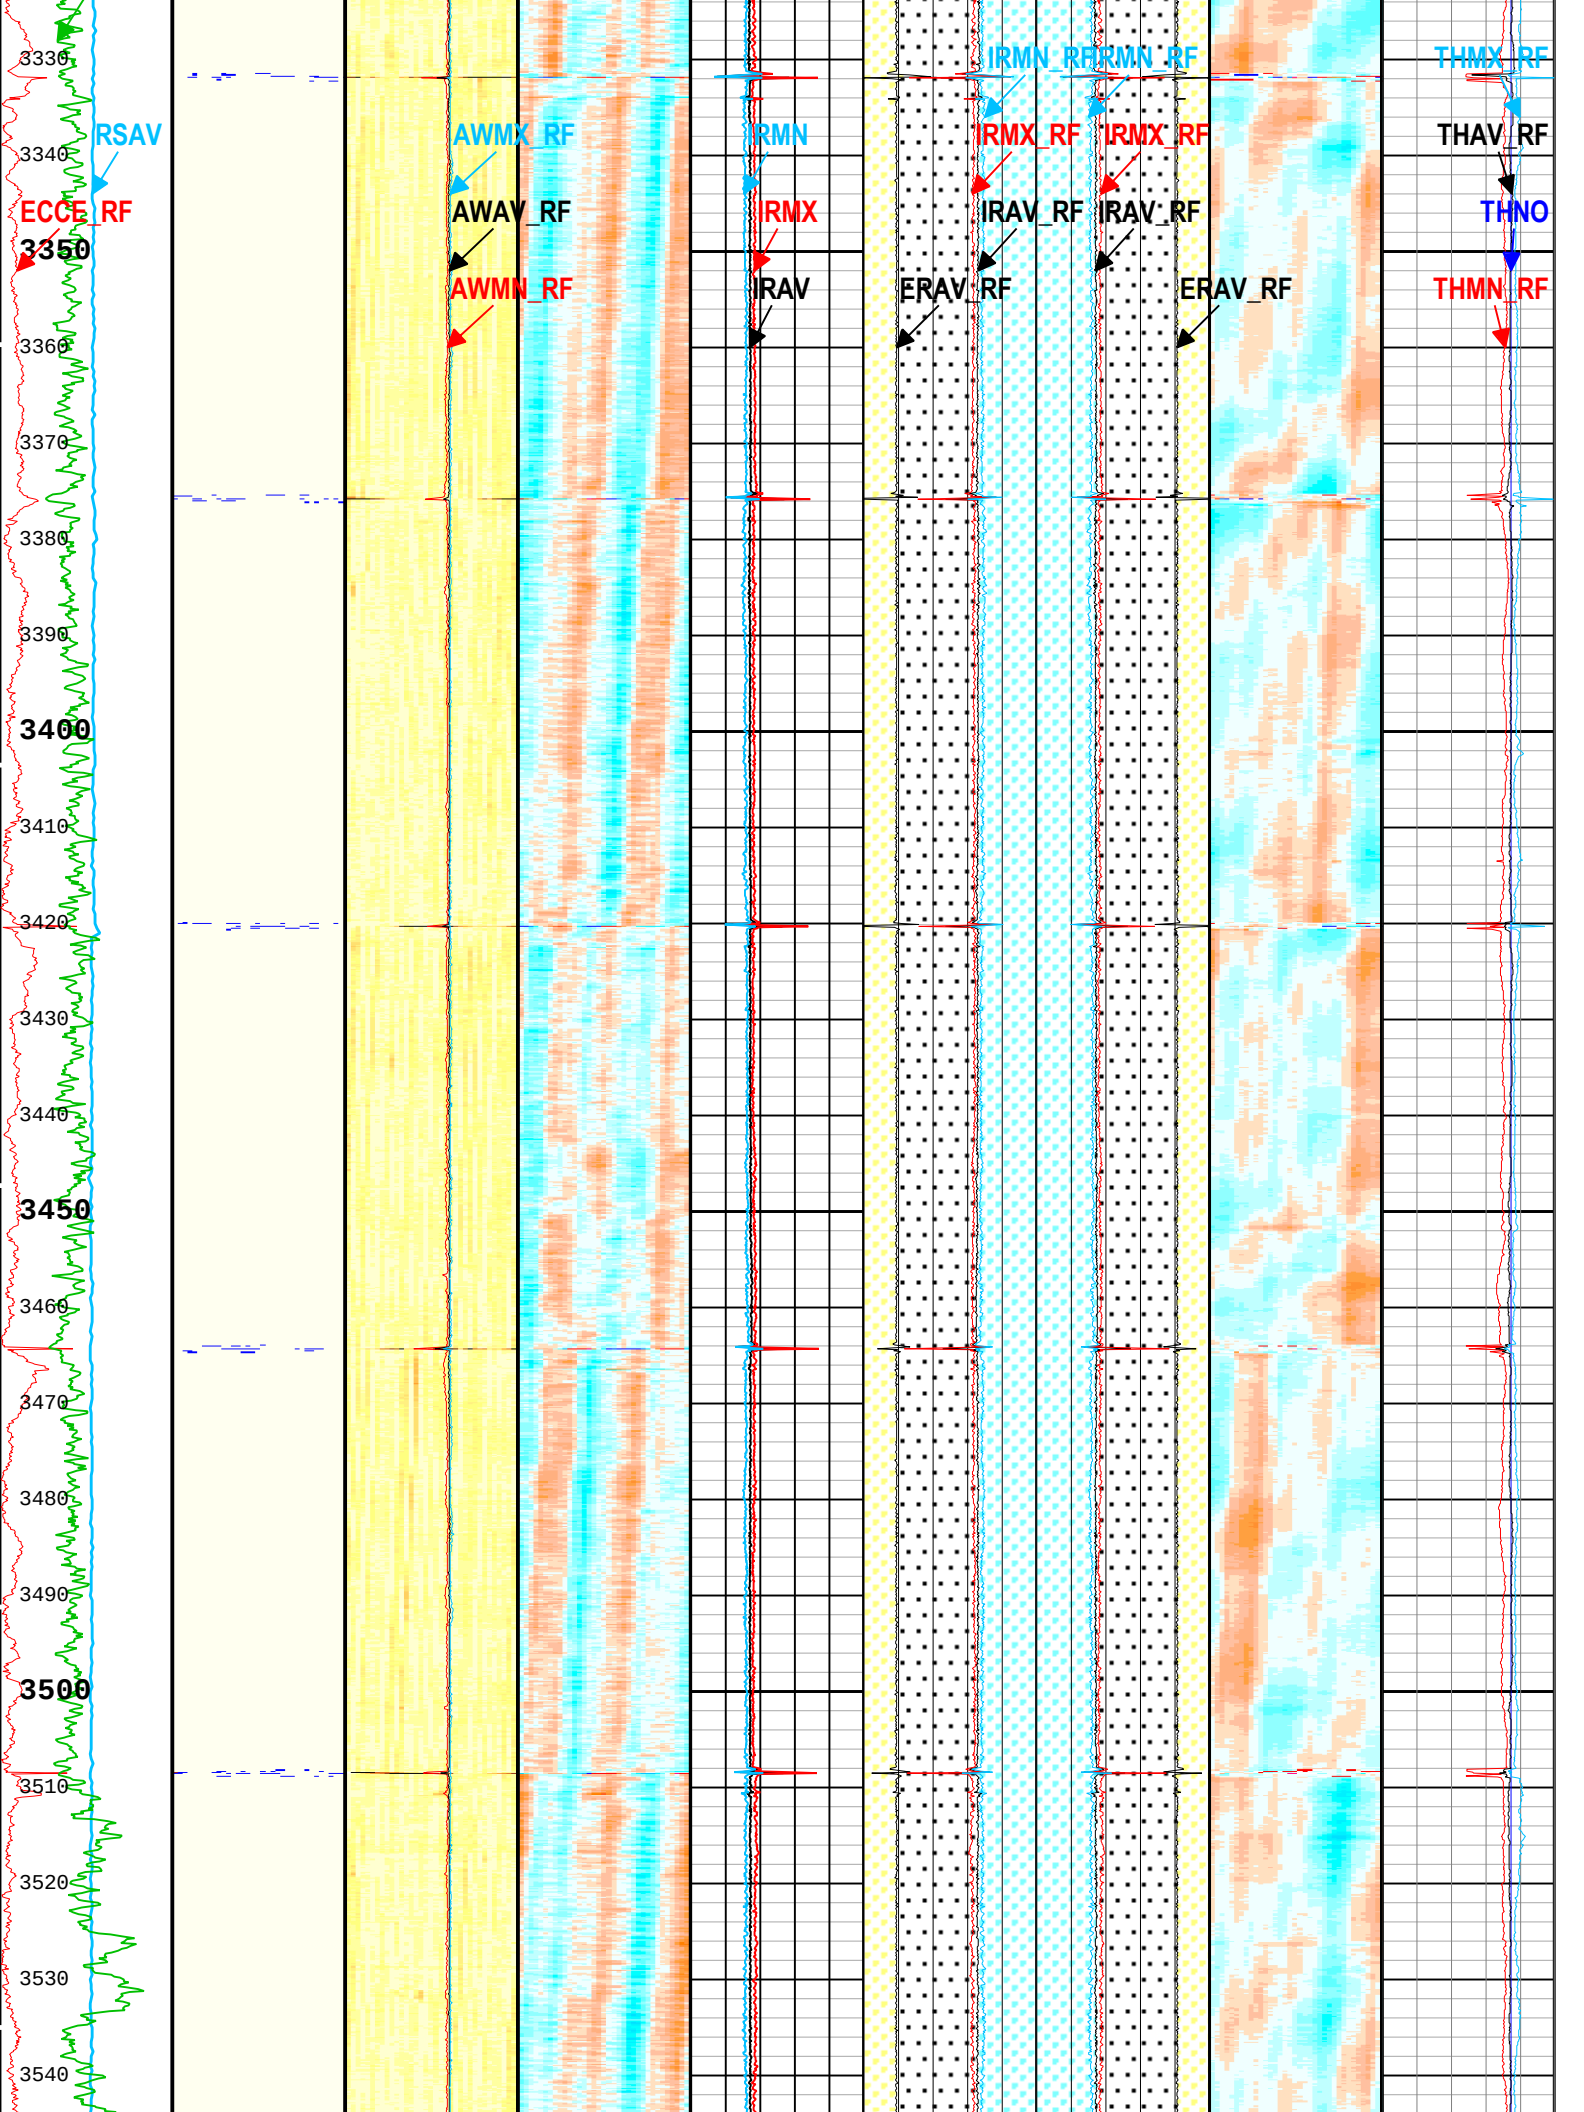
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
3330
3340
3350
3360
3370
3380
3390
3400
3410
3420
3430
3440
3450
3460
3470
3480
3490
3500
3510
3520
3530
3540

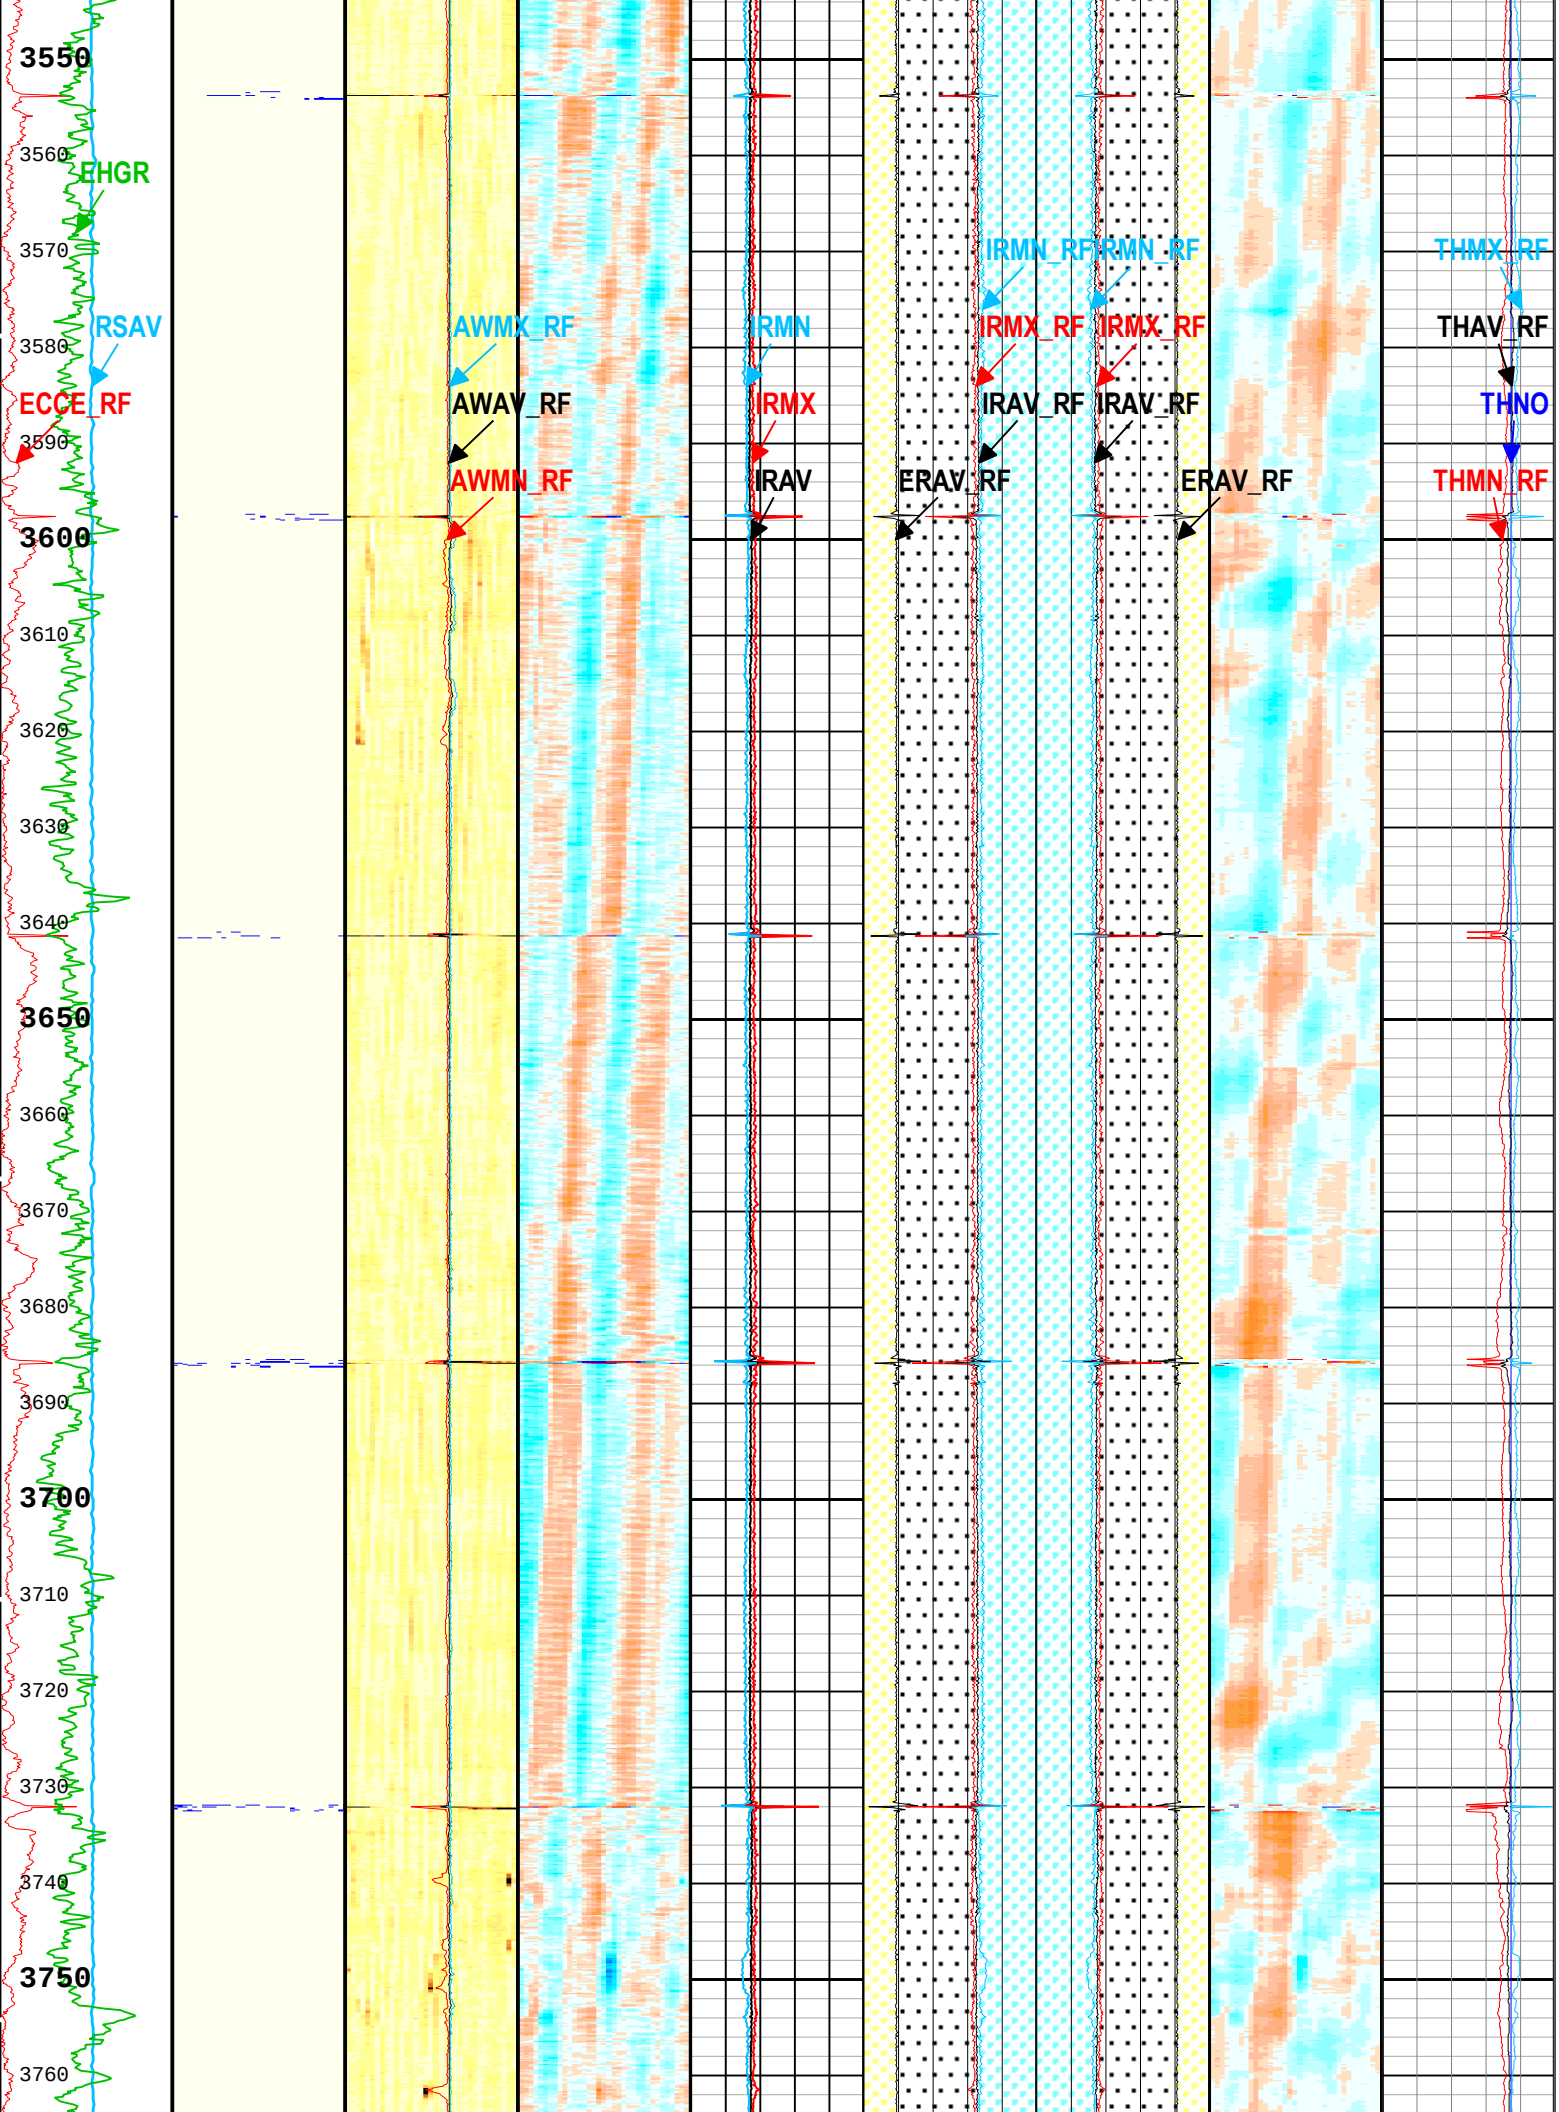
3550
3560
3570
3580
3590
3600
3610
3620
3630
3640
3650
3660
3670
3680
3690
3700
3710
3720
3730
3740
3750
3760
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

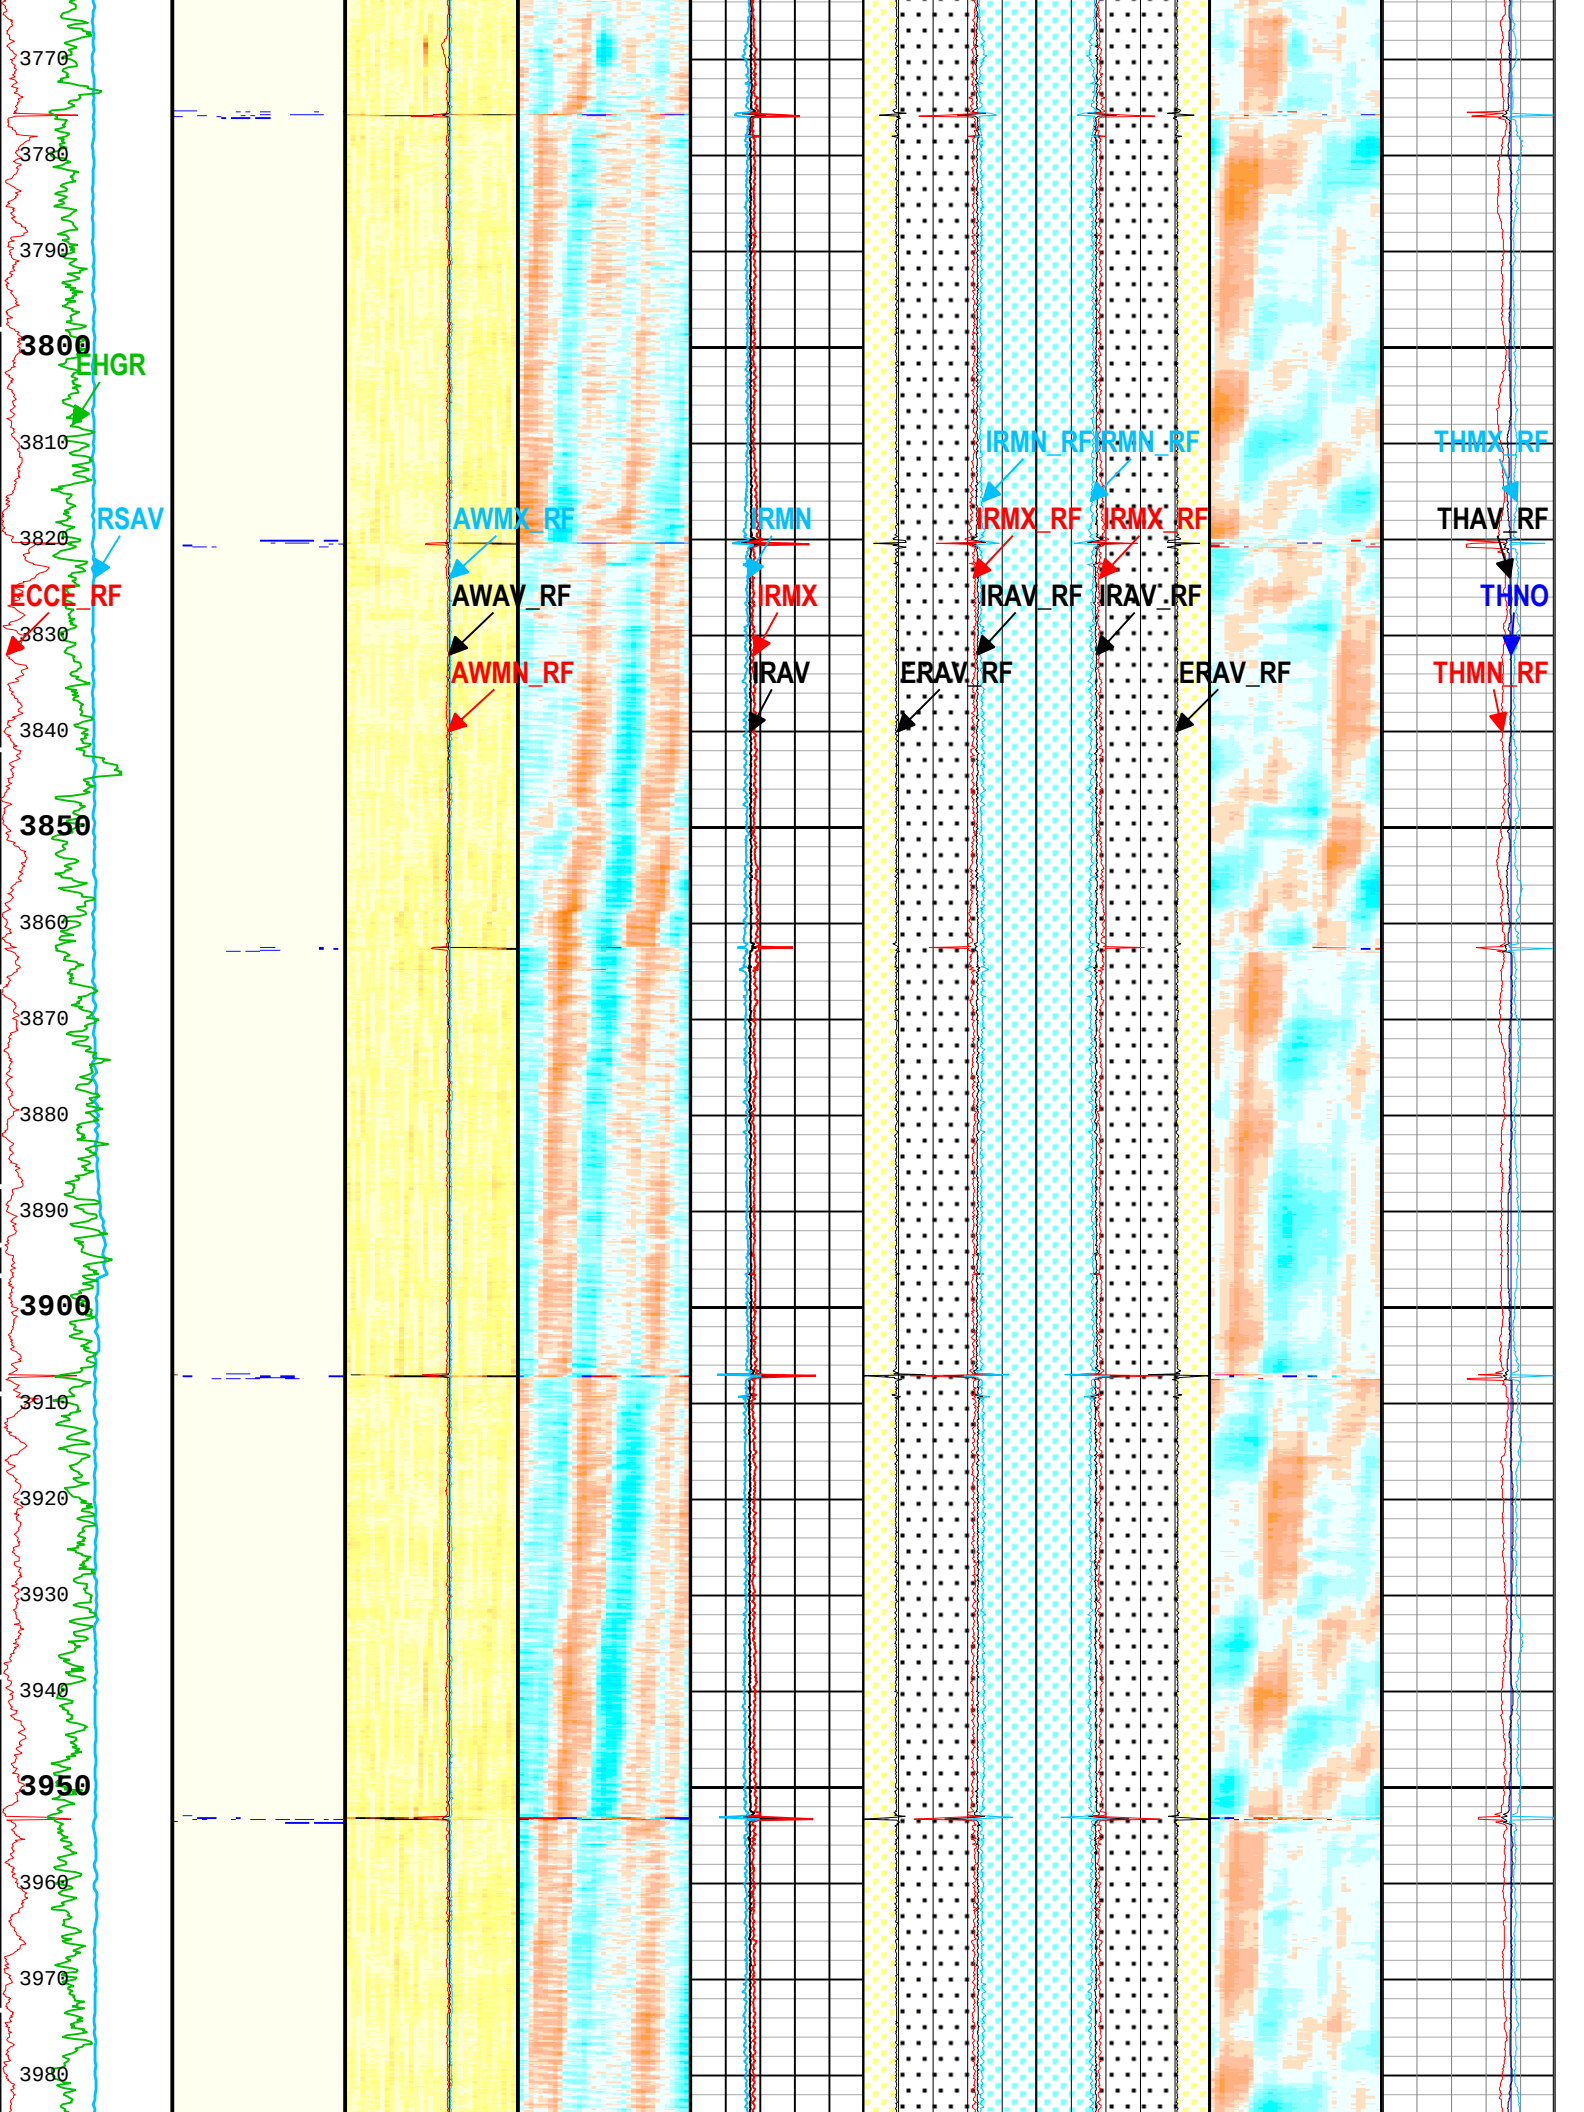
3770
3780
3790
3800
EHGR
3810
RSAV
3820
ECCE_RF
3830
3840
3850
3860
3870
3880
3890
3900
3910
3920
3930
3940
3950
3960
3970
3980
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

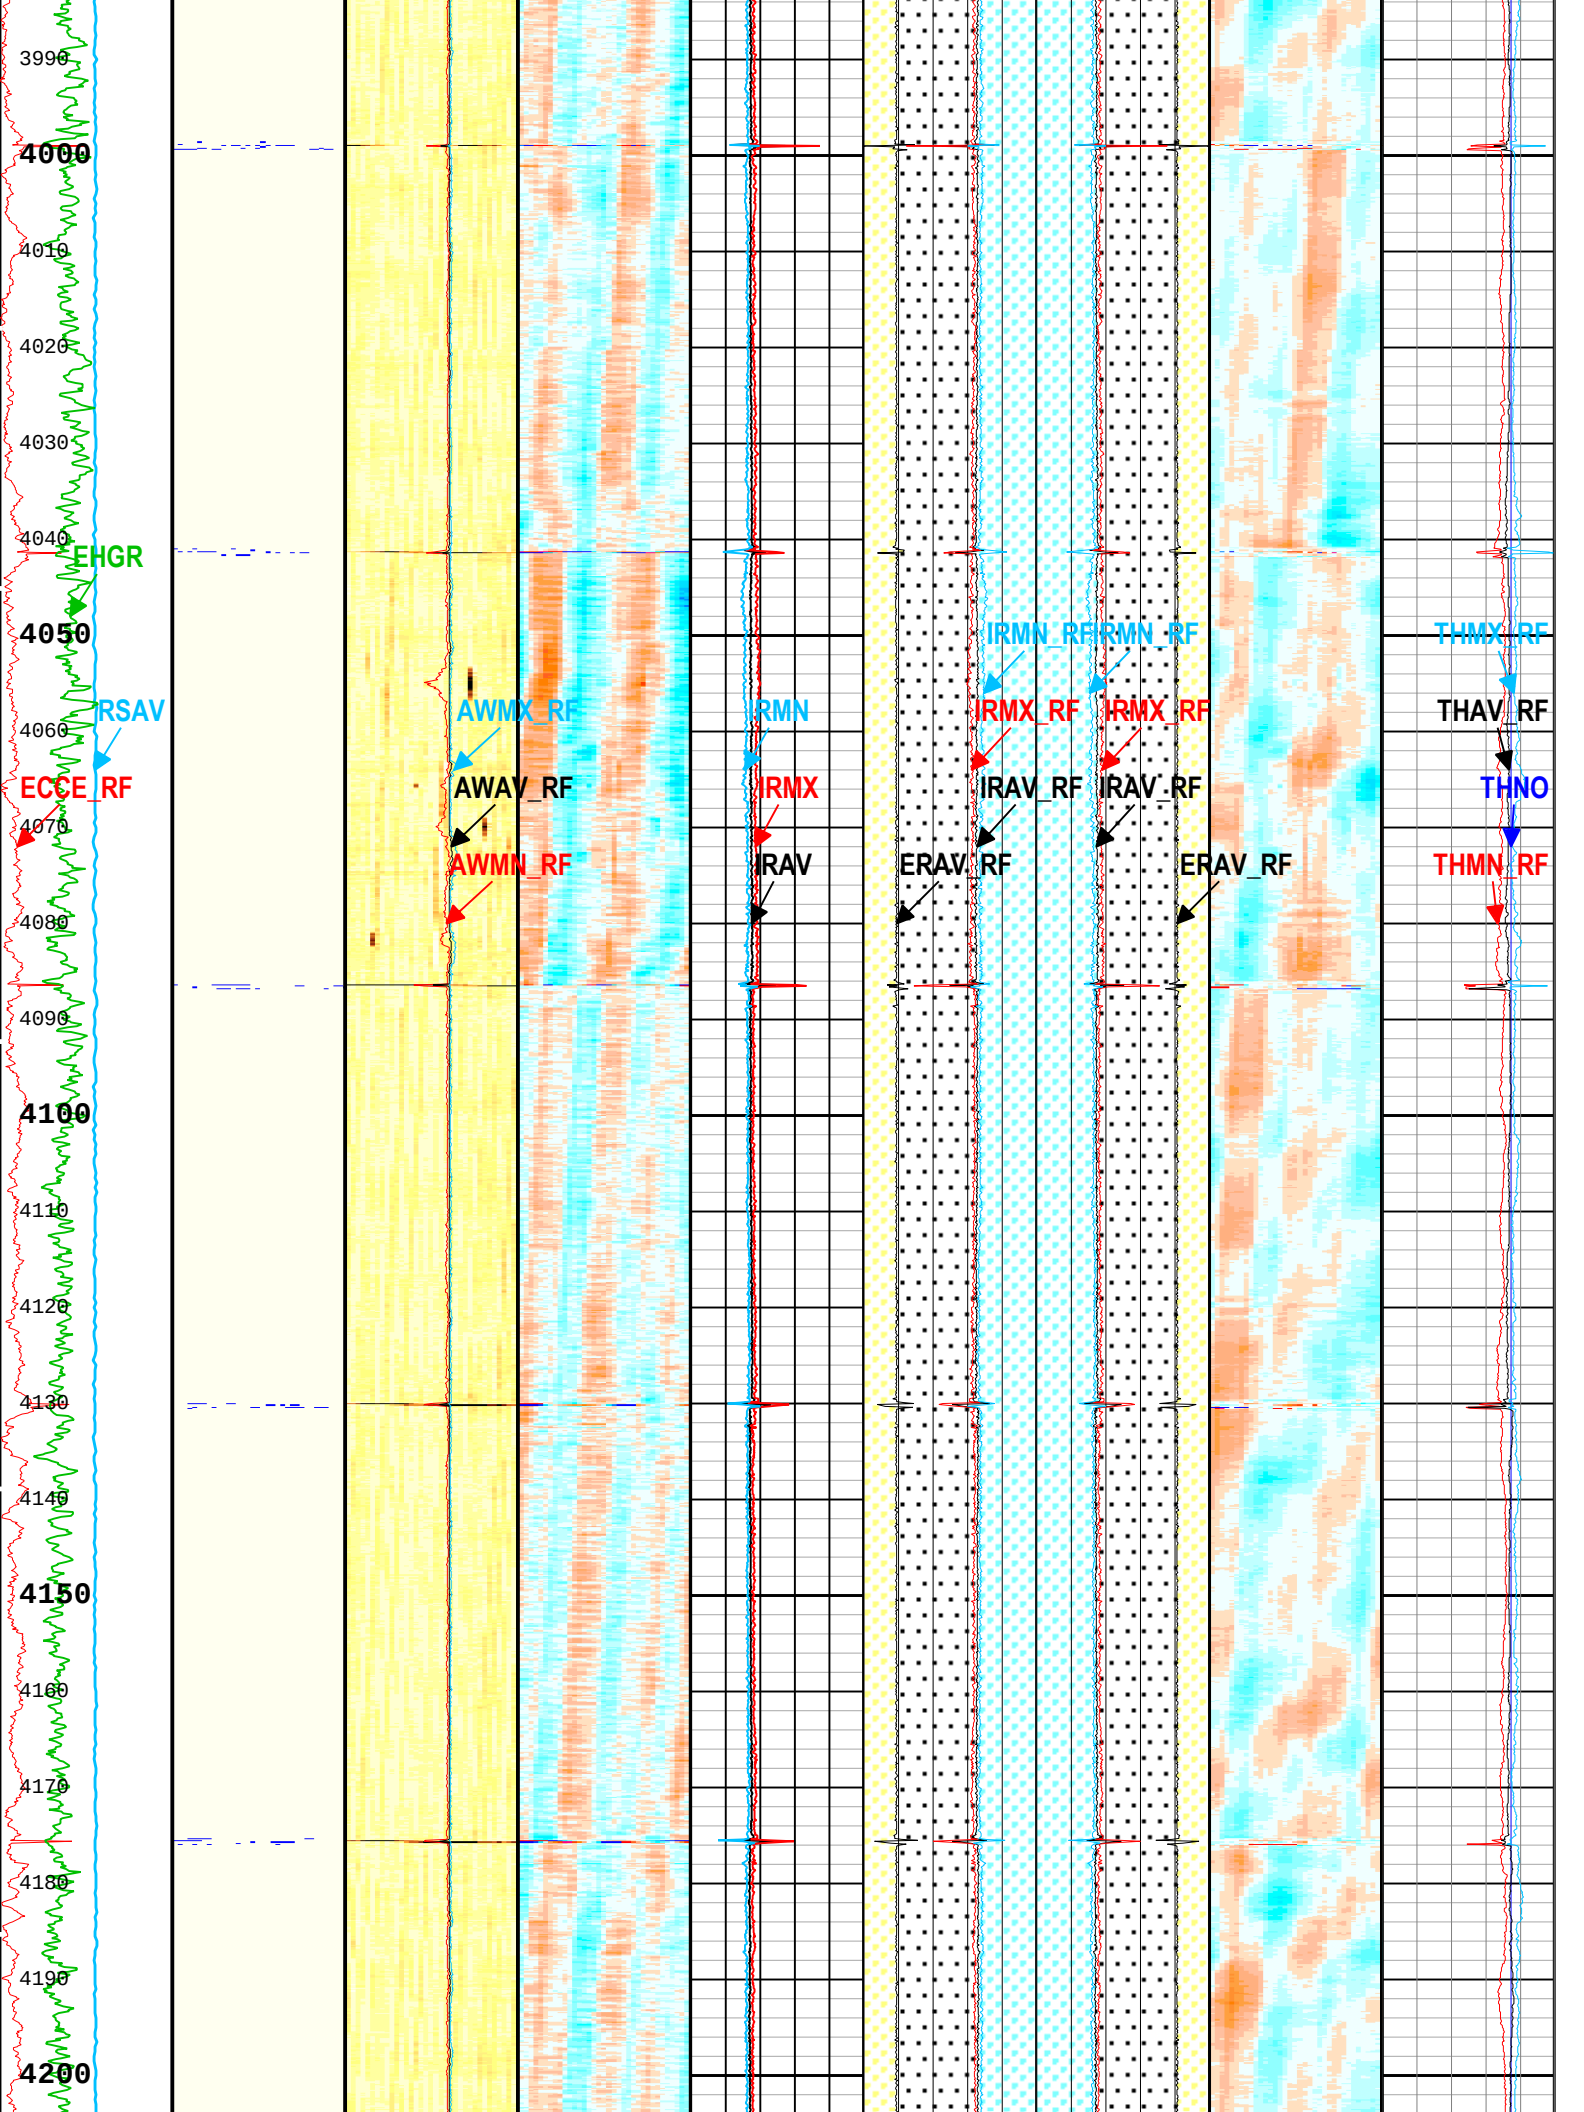
3990
4000
4010
4020
4030
4040
EHGR
4050
IRSAV
4060
ECCE_RF
4070
4080
4090
4100
4110
4120
4130
4140
4150
4160
4170
4180
4190
4200
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

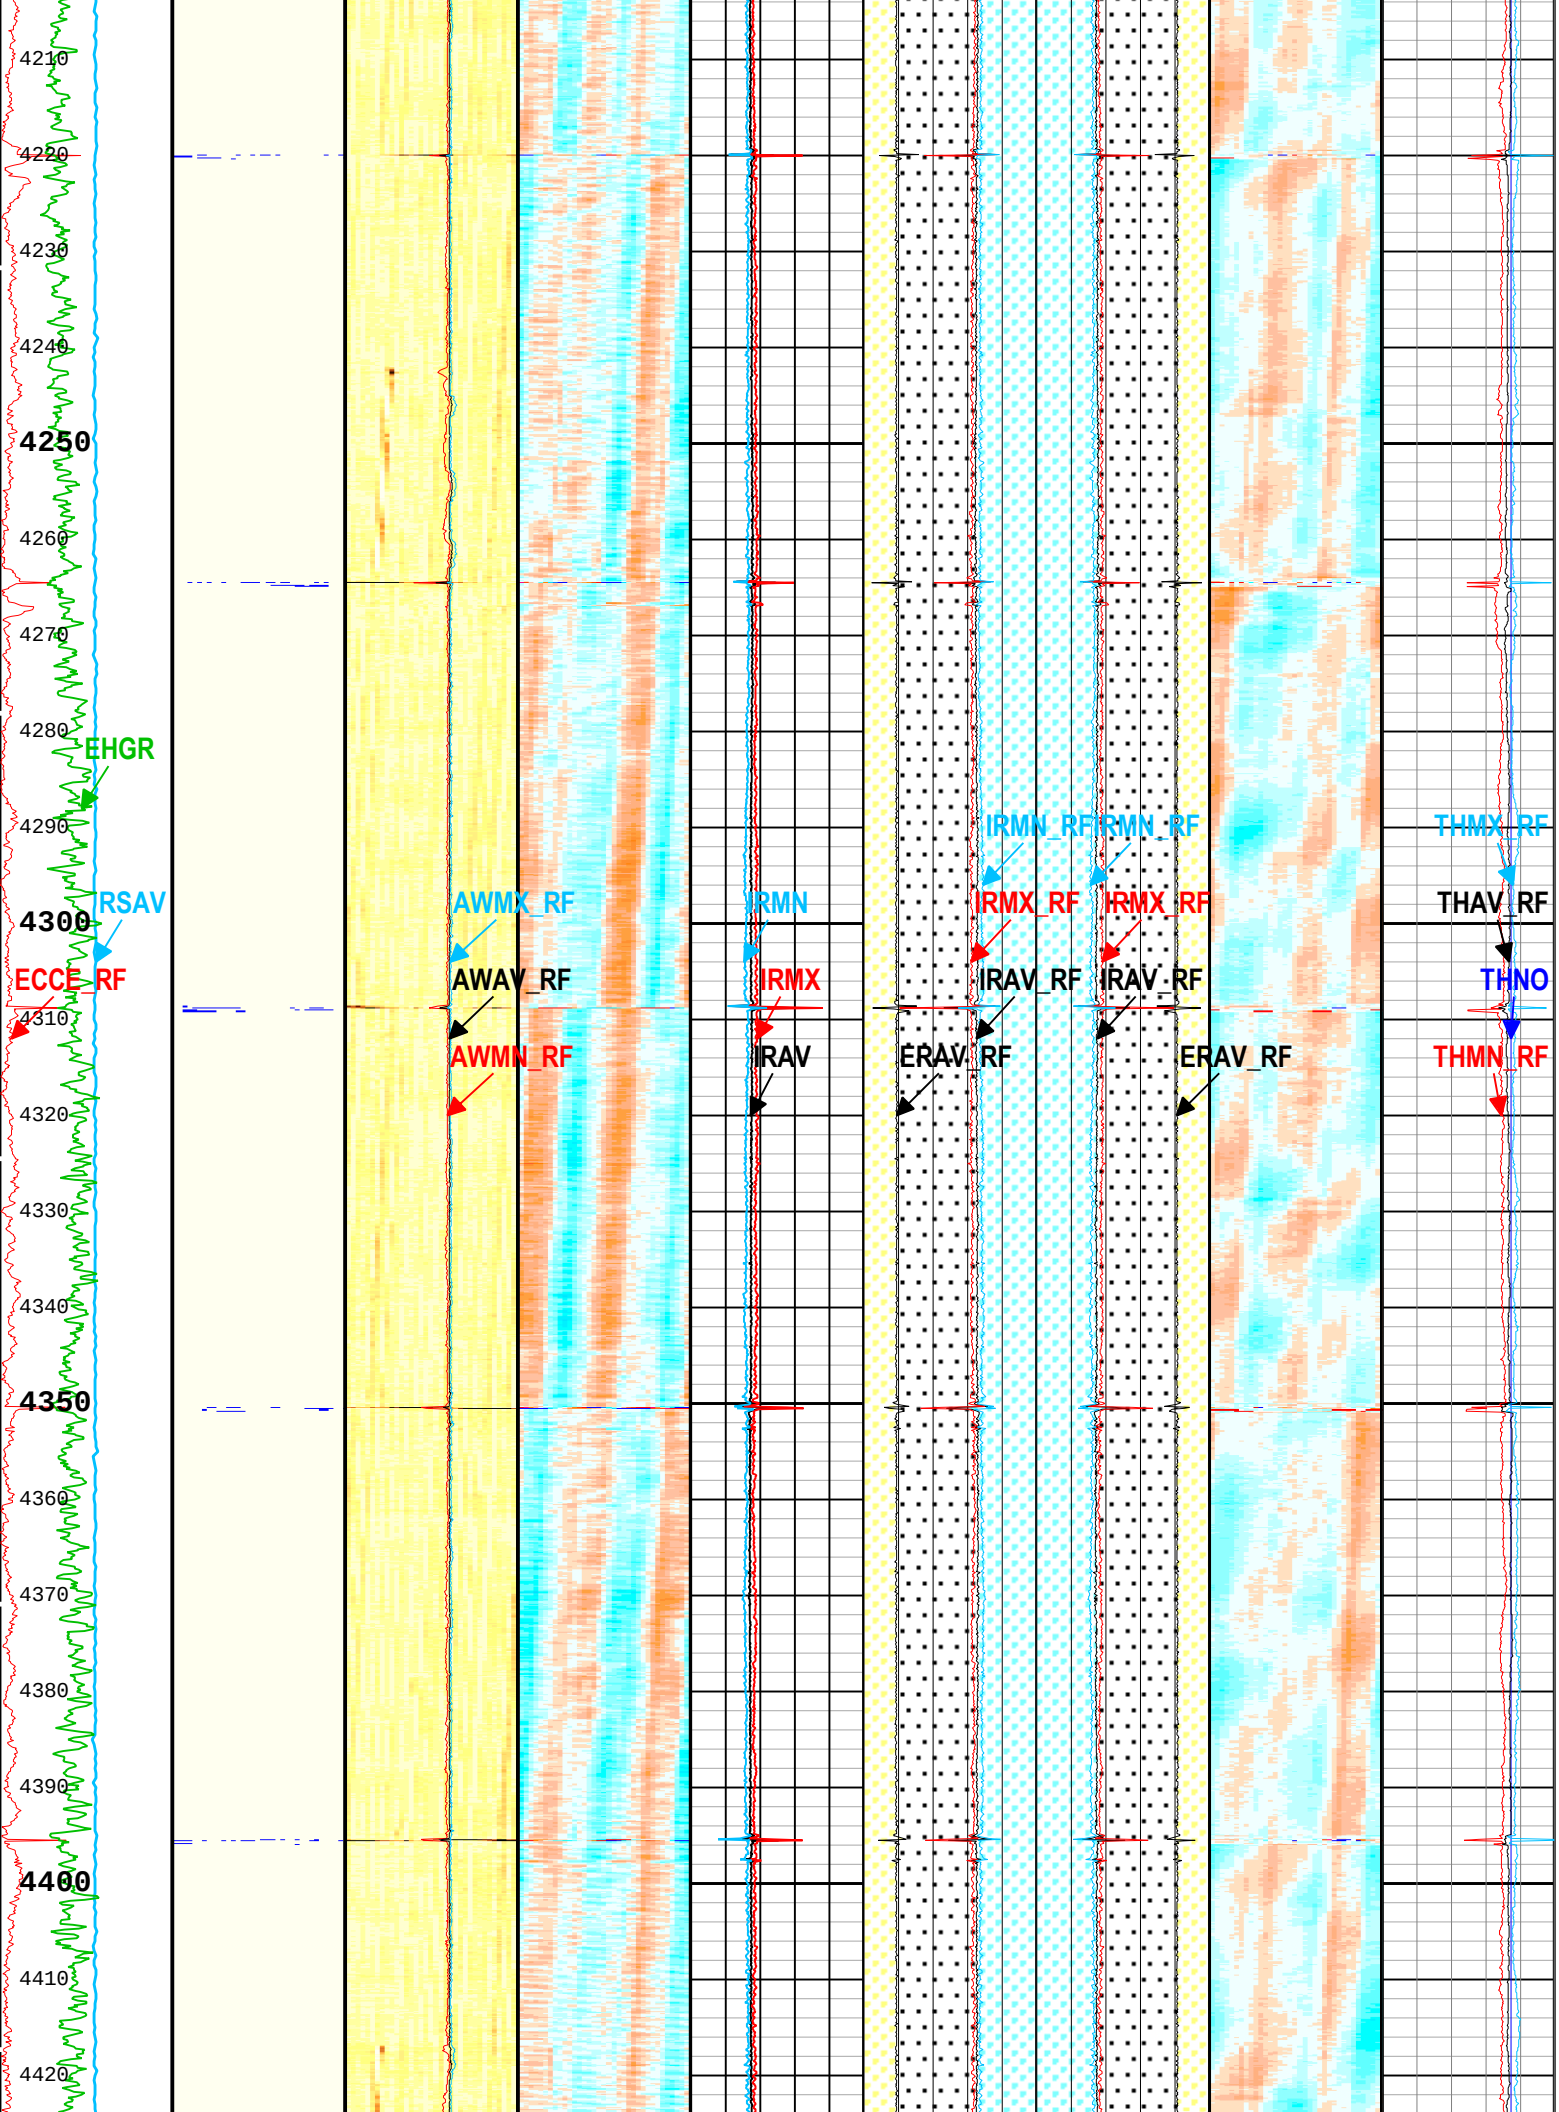
4210
4220
4230
4240
4250
4260
4270
4280
EHGR
4290
RSAV
4300
ECCE_RF
4310
4320
4330
4340
4350
4360
4370
4380
4390
4400
4410
4420
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

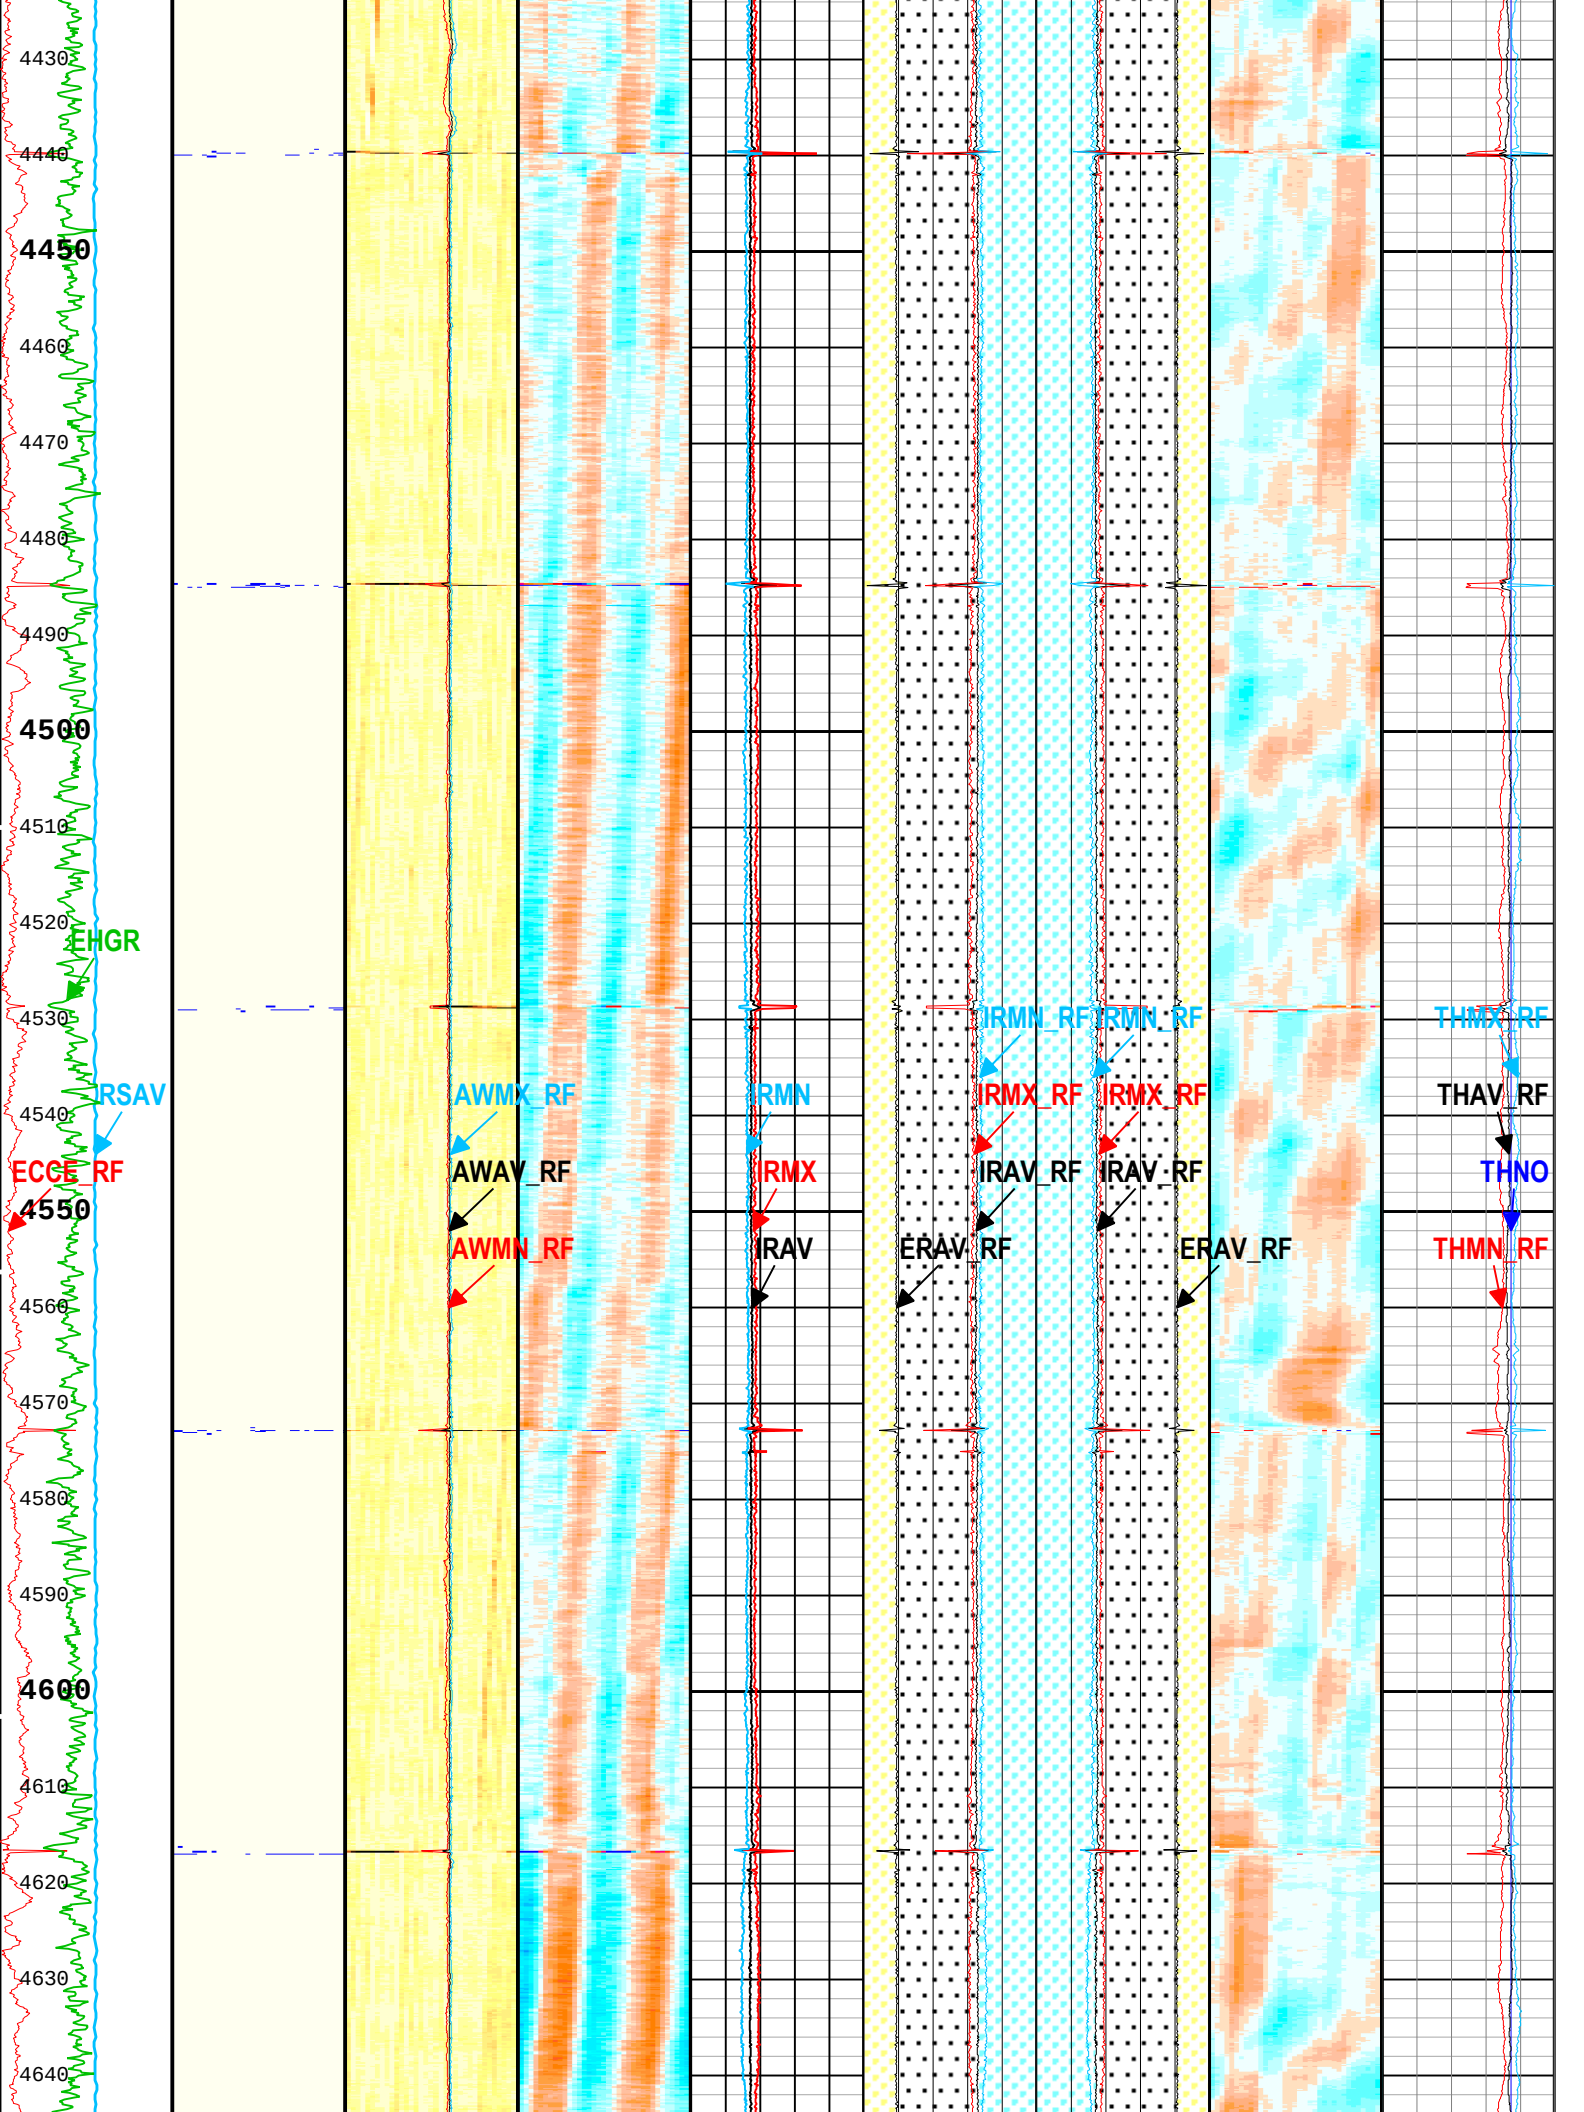
4430
4440
4450
4460
4470
4480
4490
4500
4510
4520
EHGR
4530
RSAV
4540
ECCE_RF
4550
4560
4570
4580
4590
4600
4610
4620
4630
4640
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

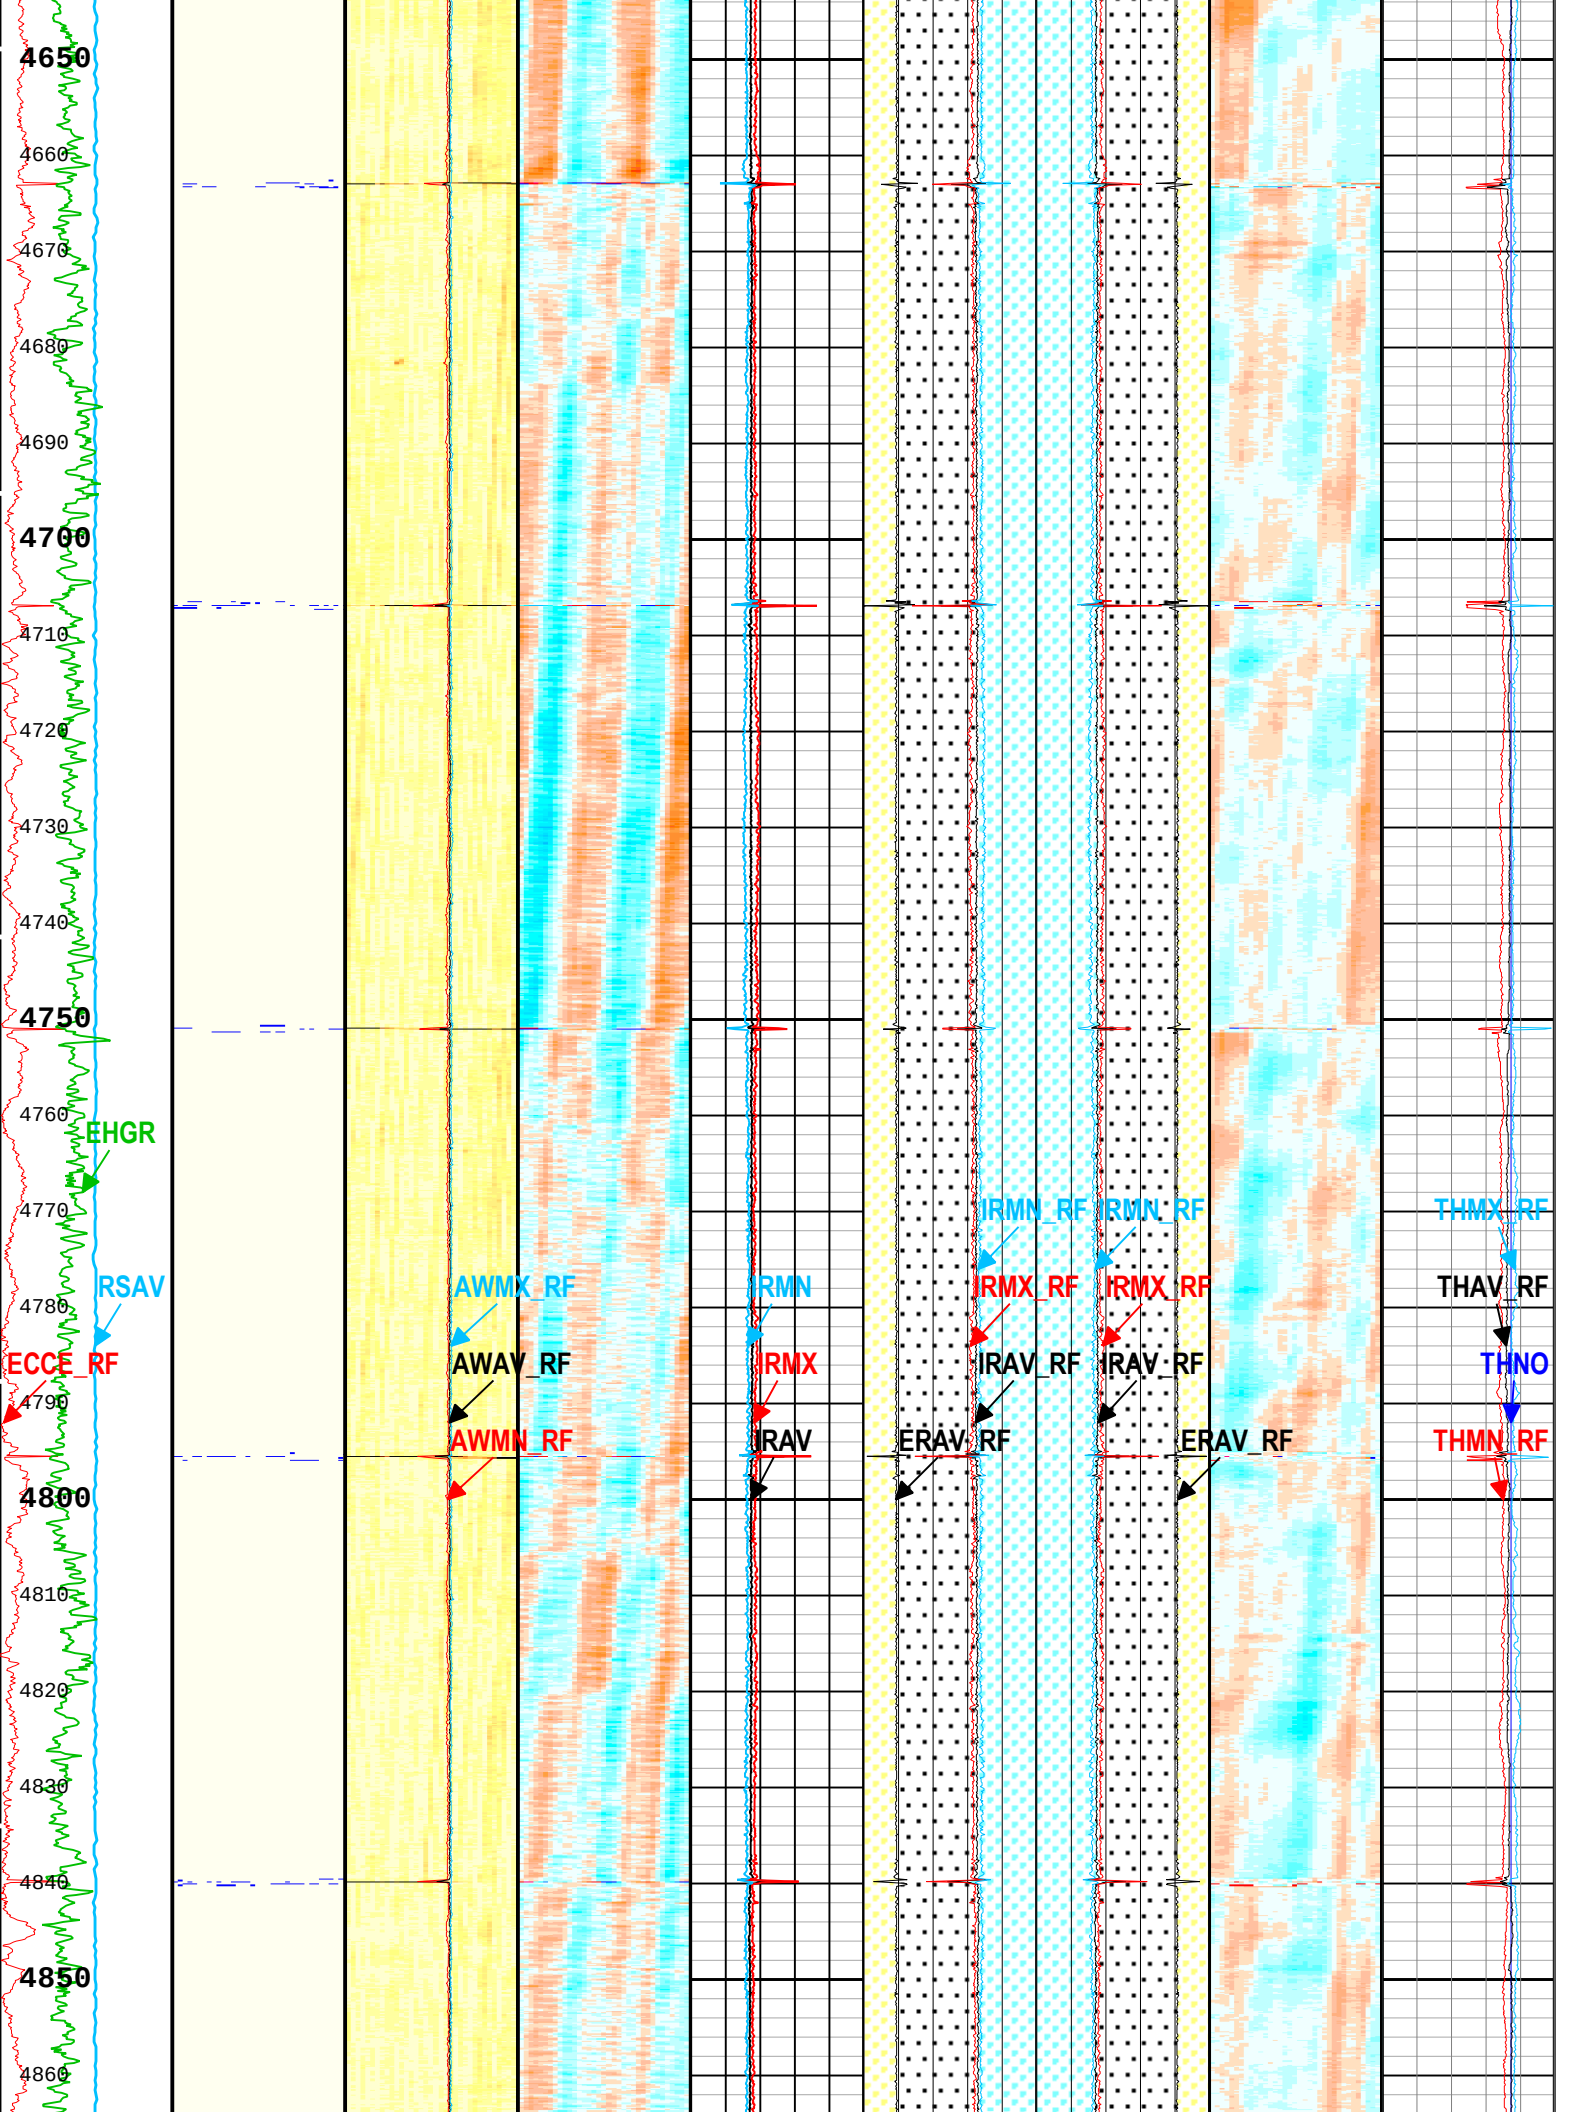
4650
4660
4670
4680
4690
4700
4710
4720
4730
4740
4750
4760
4770
4780
4790
4800
4810
4820
4830
4840
4850
4860
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

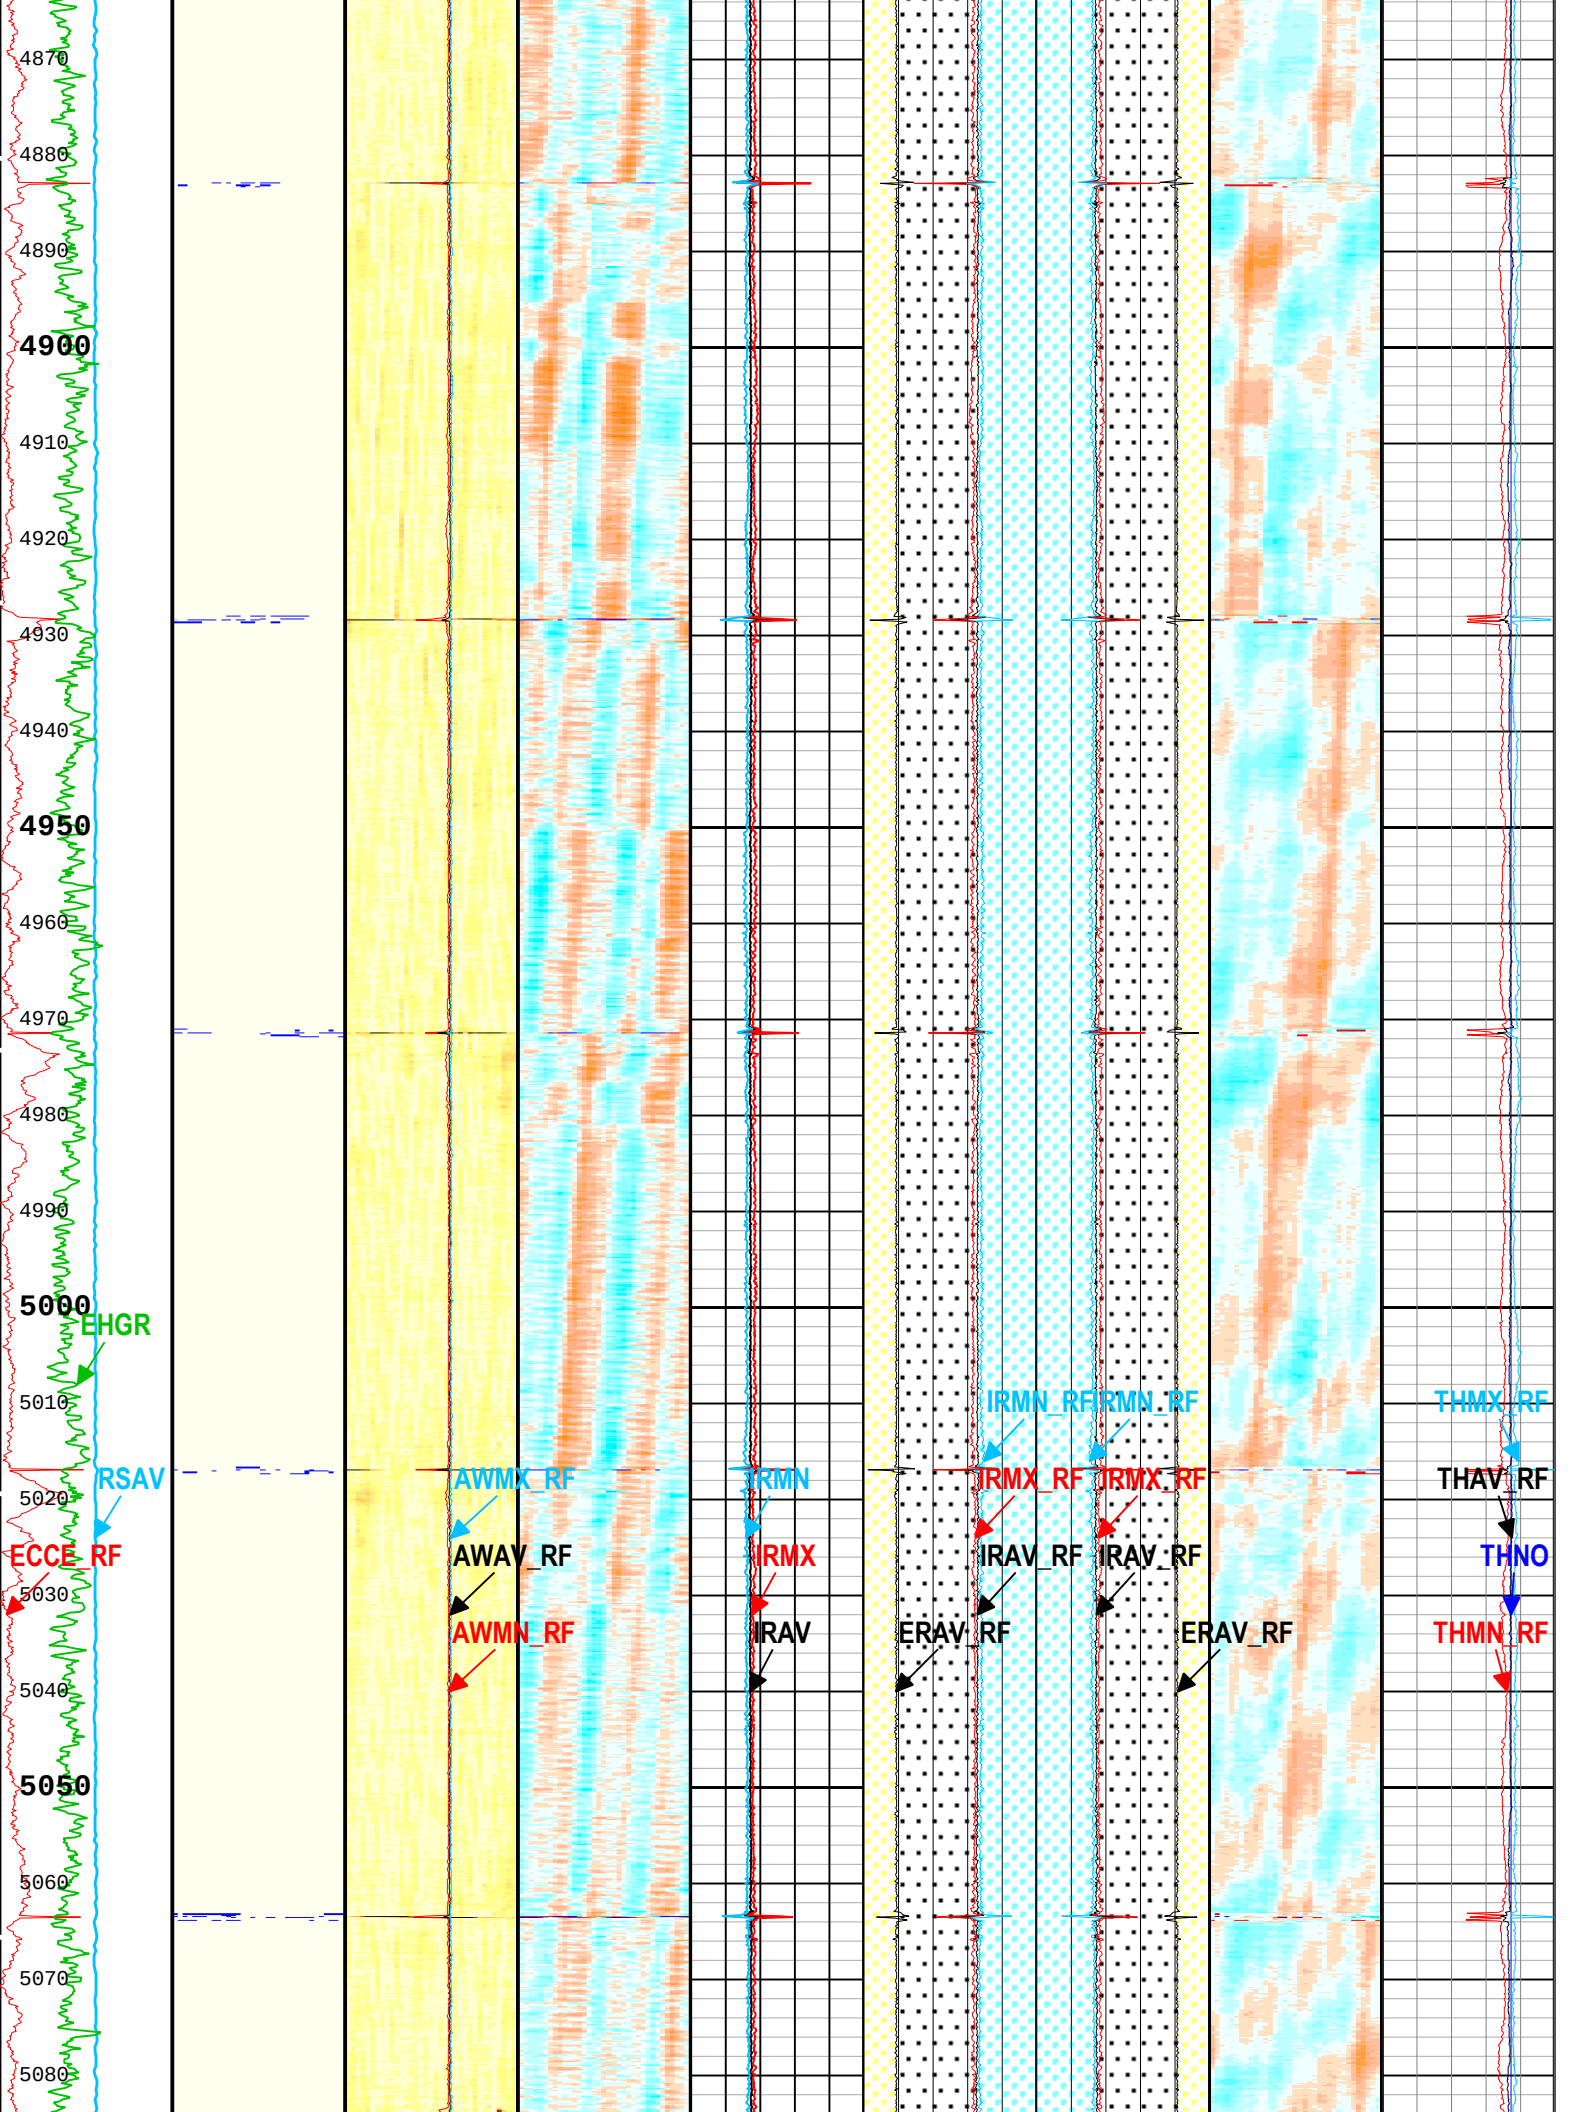
4870
4880
4890
4900
4910
4920
4930
4940
4950
4960
4970
4980
4990
5000
5010
5020
5030
5040
5050
5060
5070
5080
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

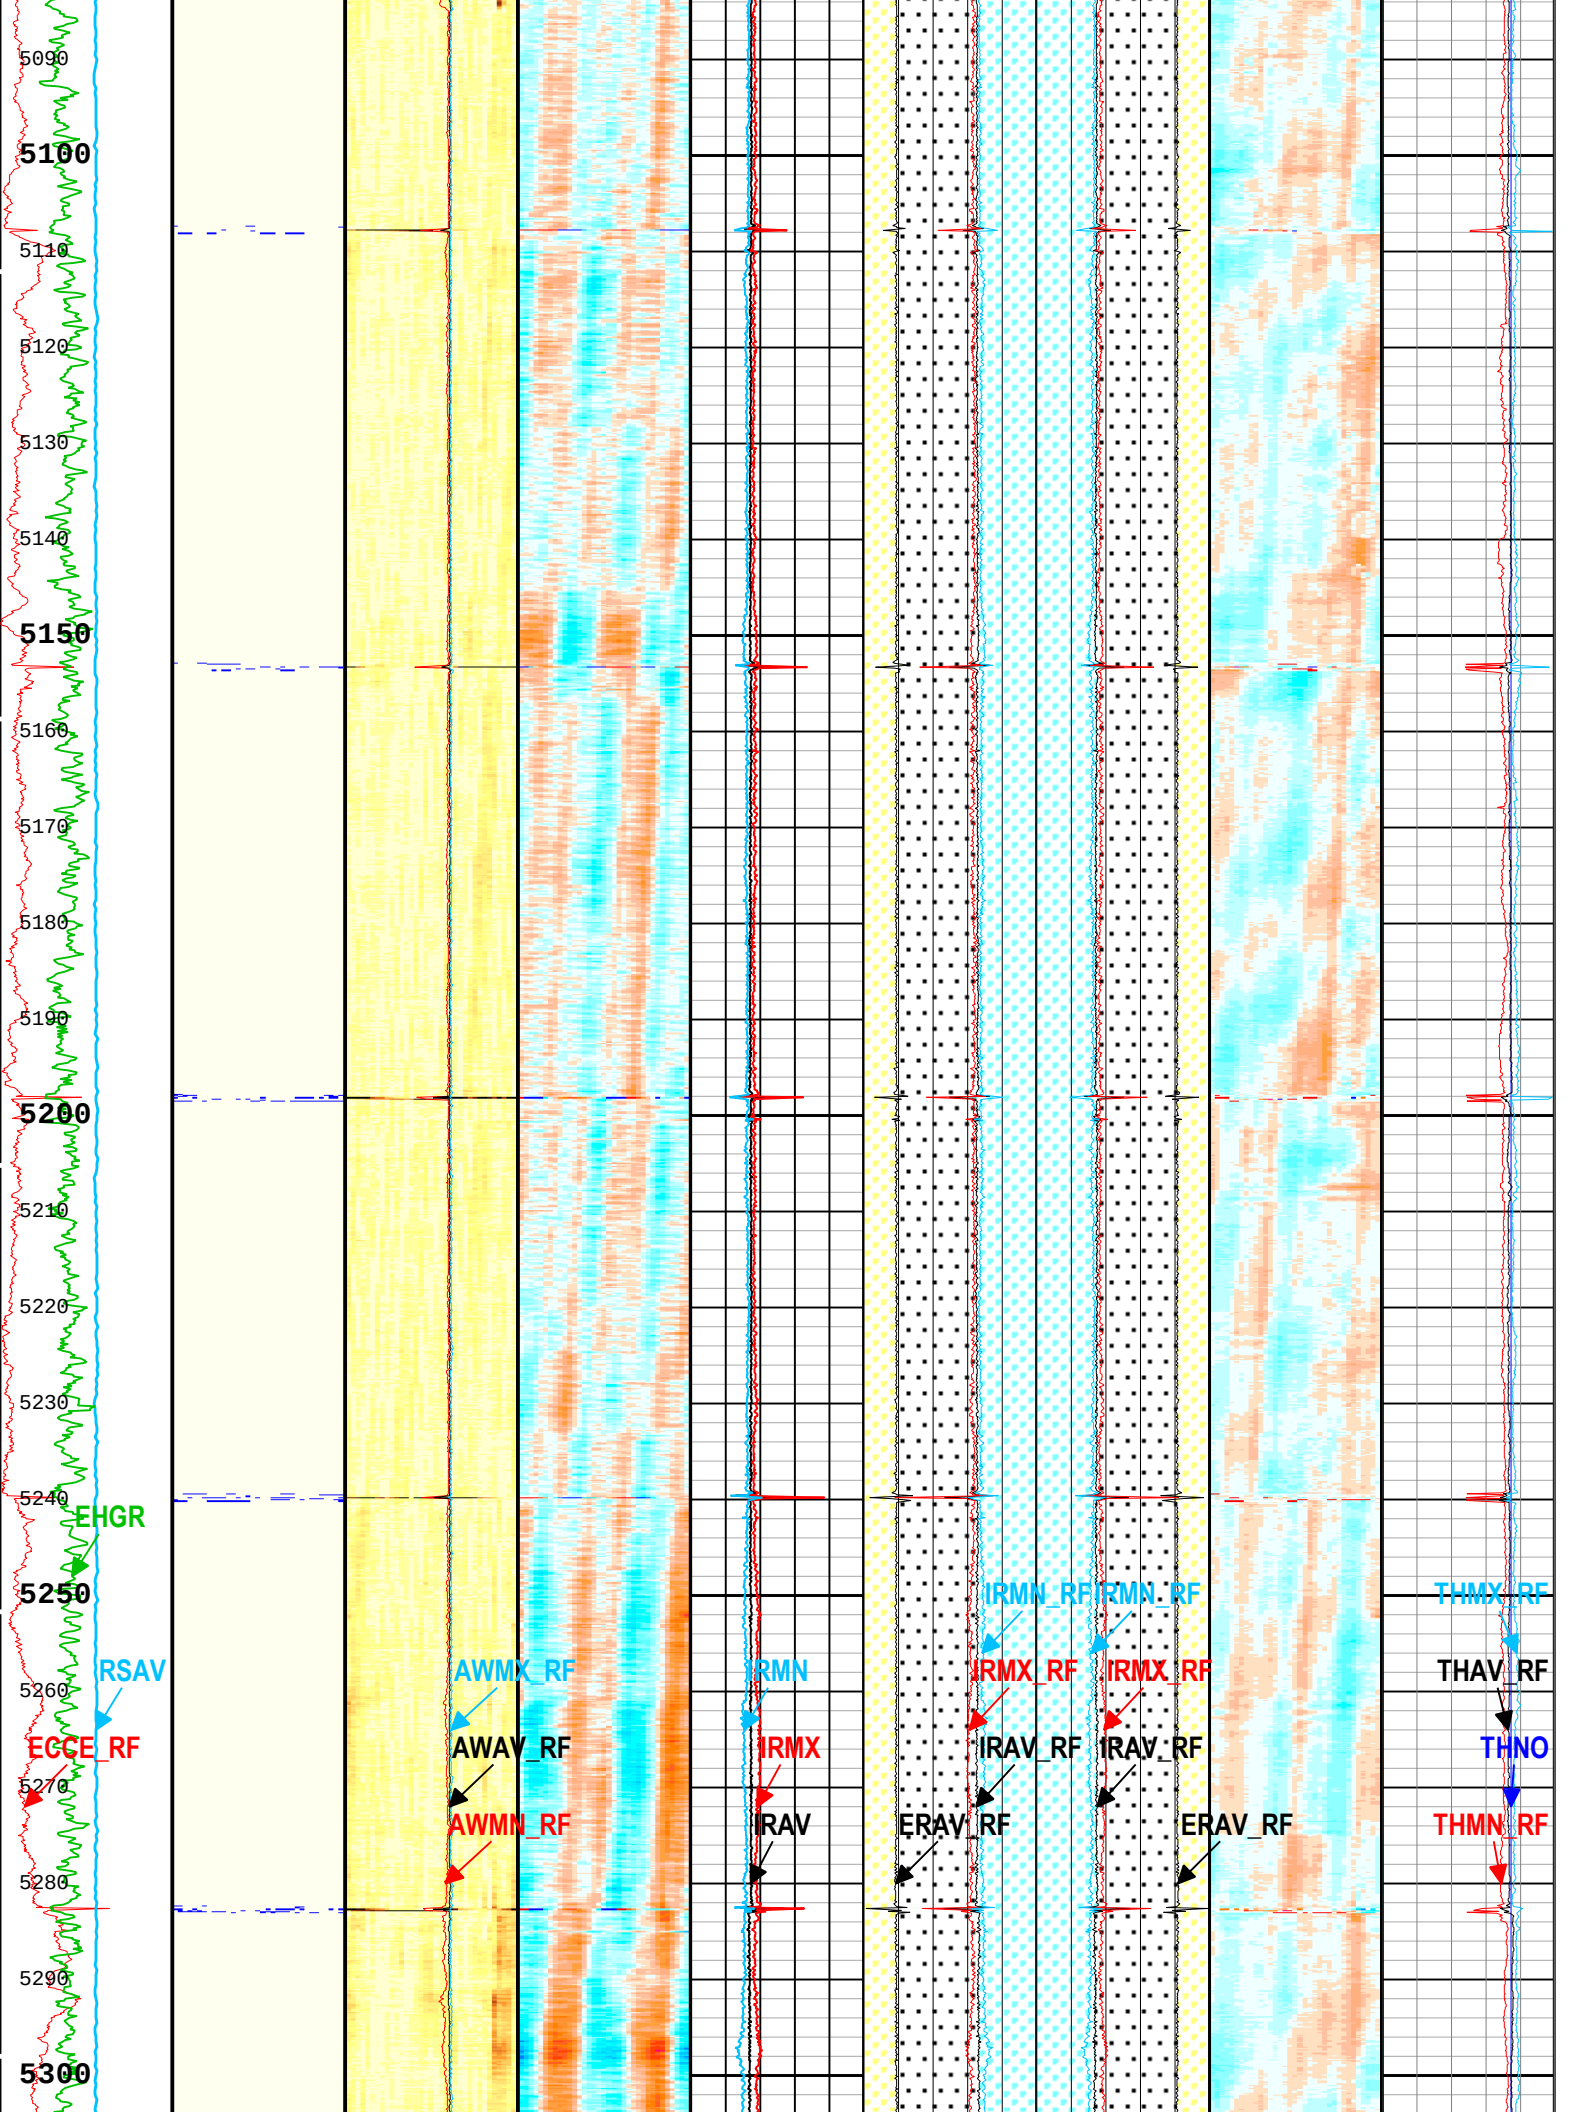
5090
5100
5110
5120
5130
5140
5150
5160
5170
5180
5190
5200
5210
5220
5230
5240
5250
5260
5270
5280
5290
5300
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

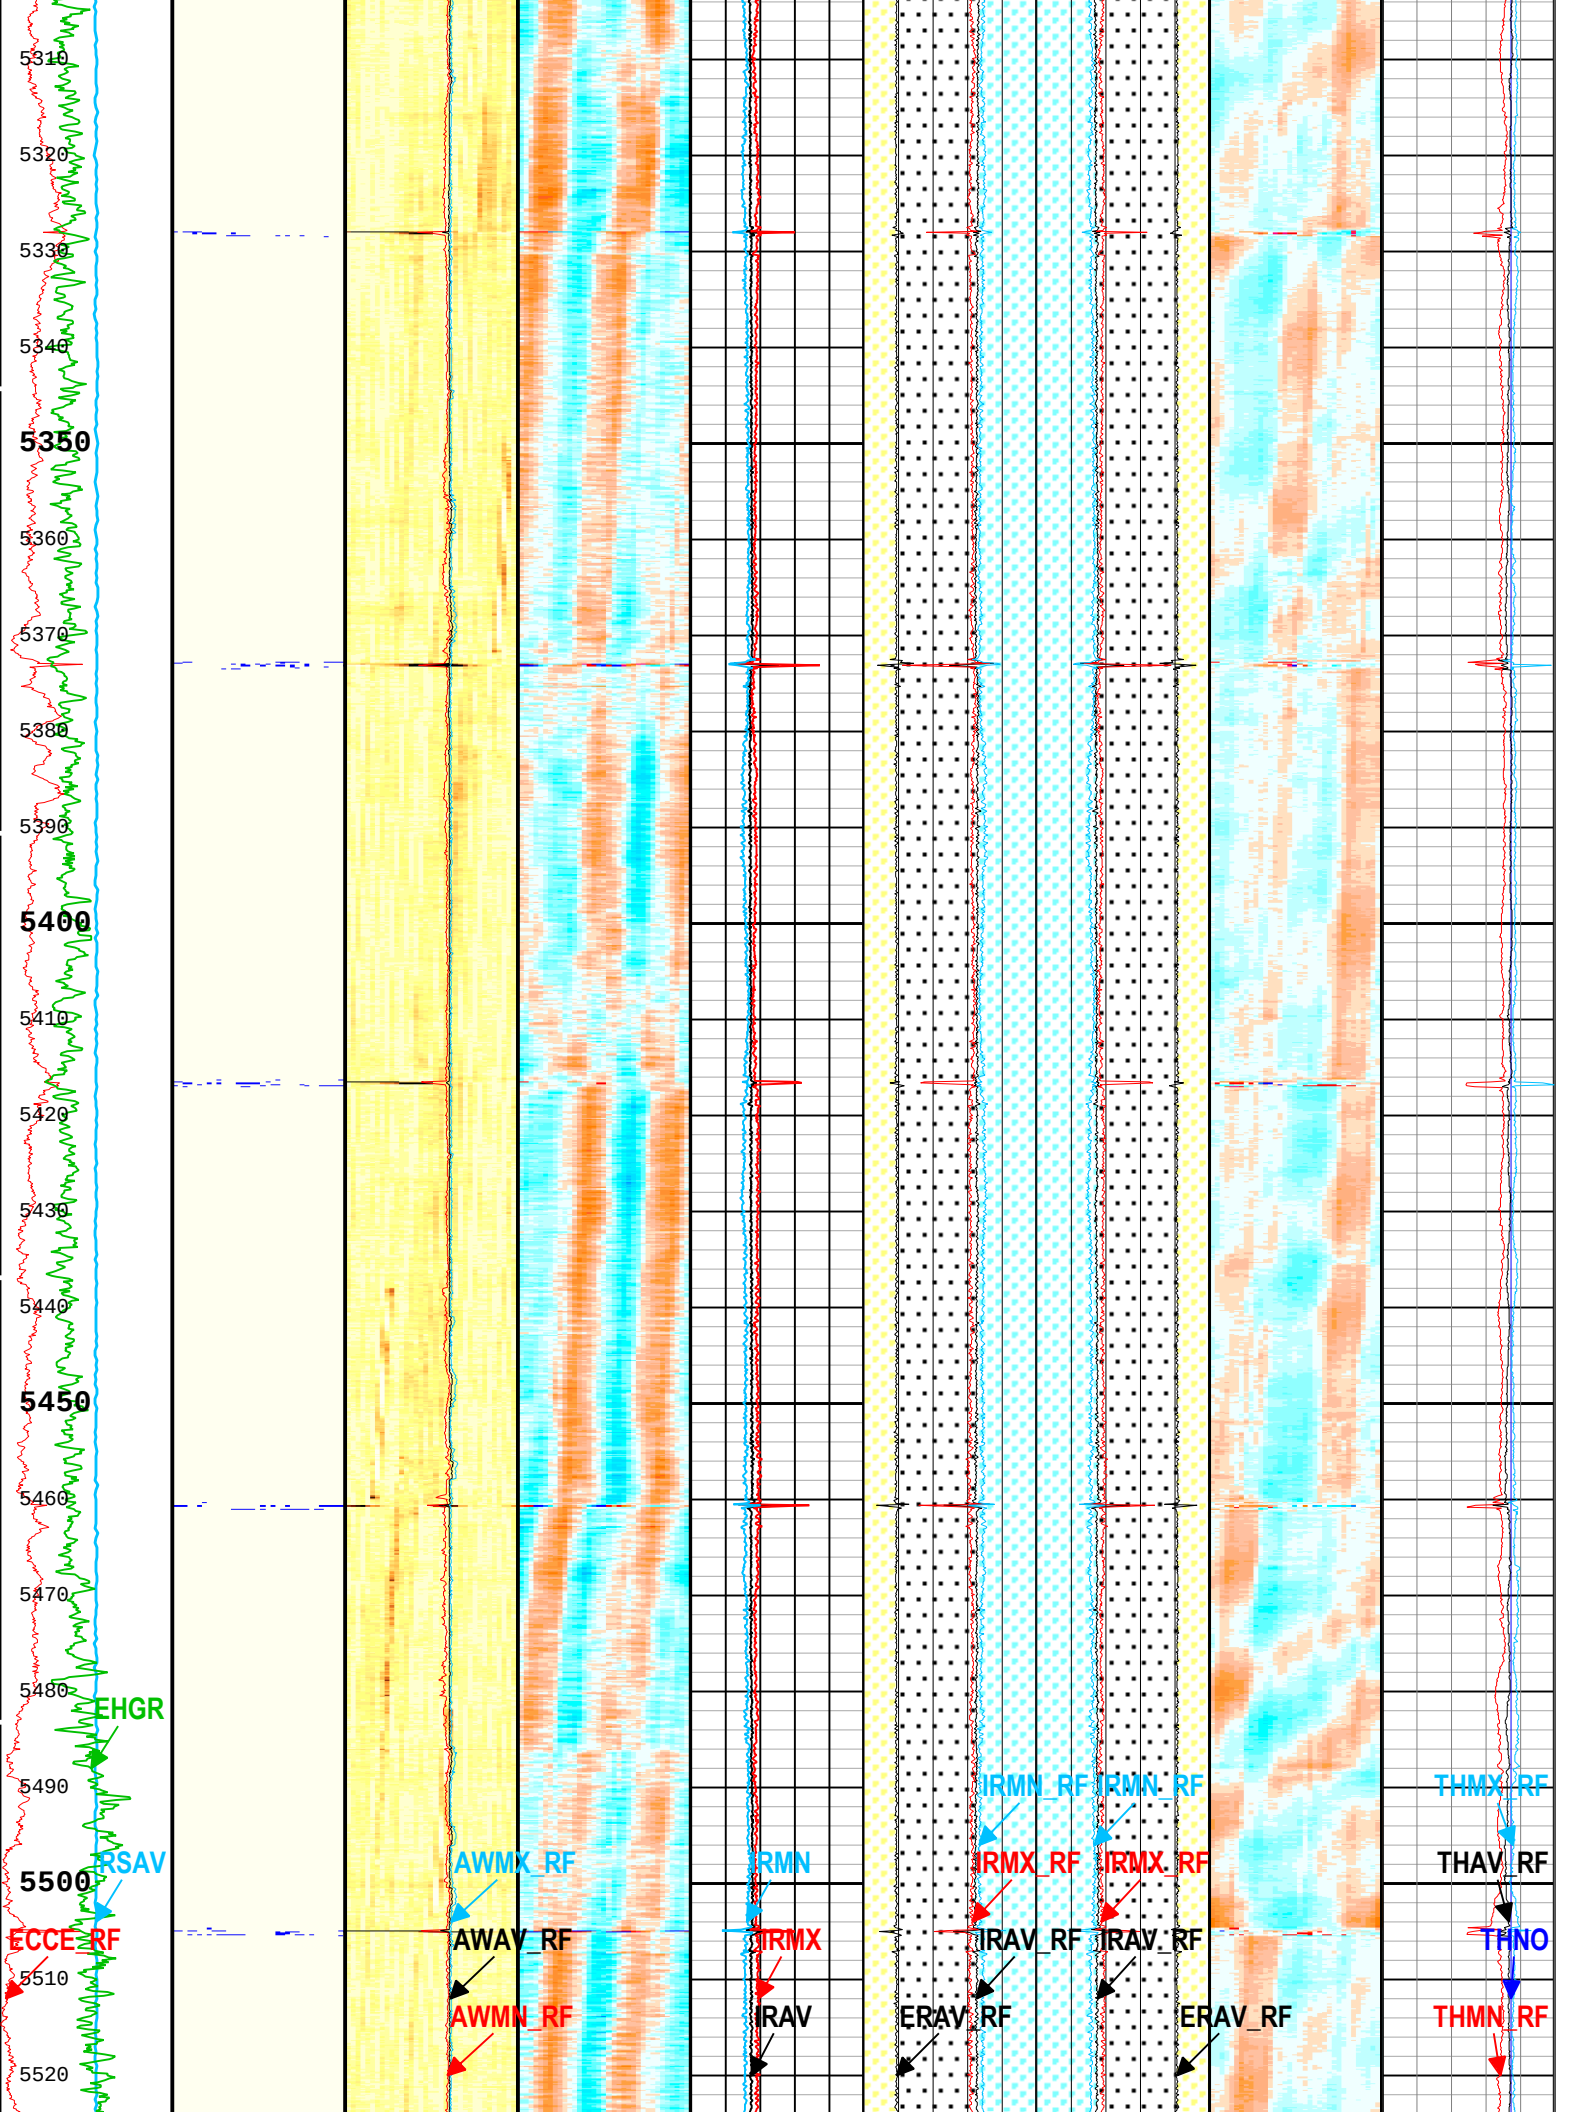
5310
5320
5330
5340
5350
5360
5370
5380
5390
5400
5410
5420
5430
5440
5450
5460
5470
5480
5490
5500
5510
5520
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

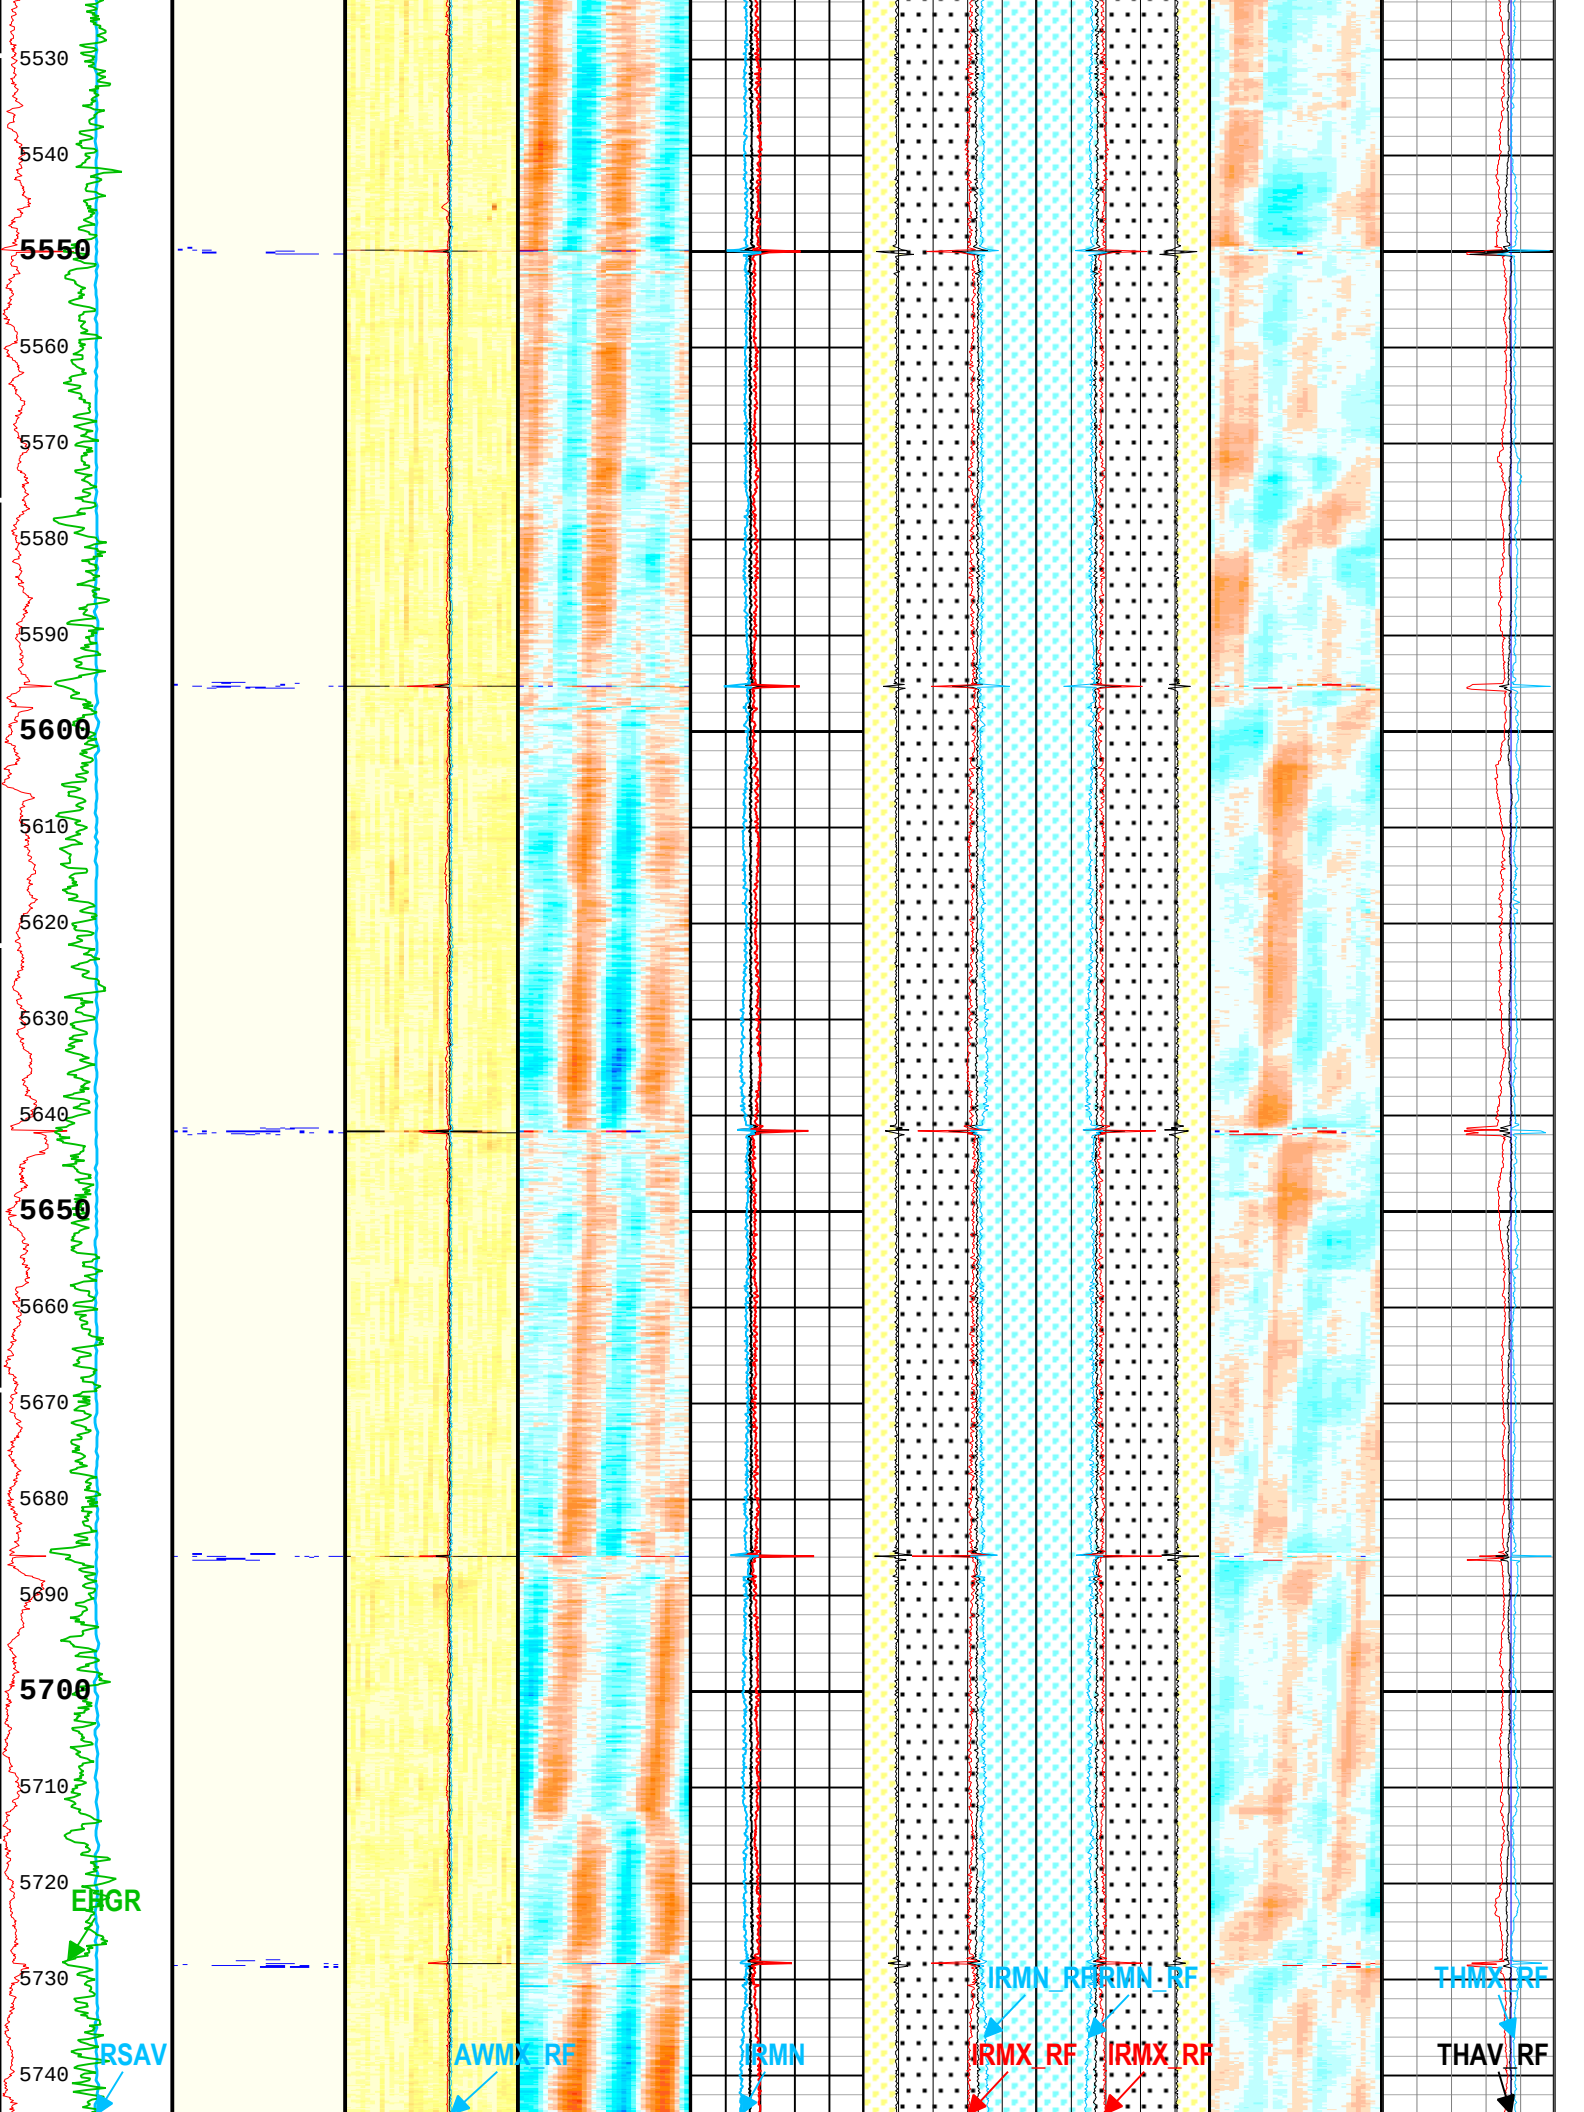
5530
5540
5550
5560
5570
5580
5590
5600
5610
5620
5630
5640
5650
5660
5670
5680
5690
5700
5710
5720
5730
5740
EHGR
RSAV
AWMX_RF
IRMN
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
THMX_RF
THAV_RF

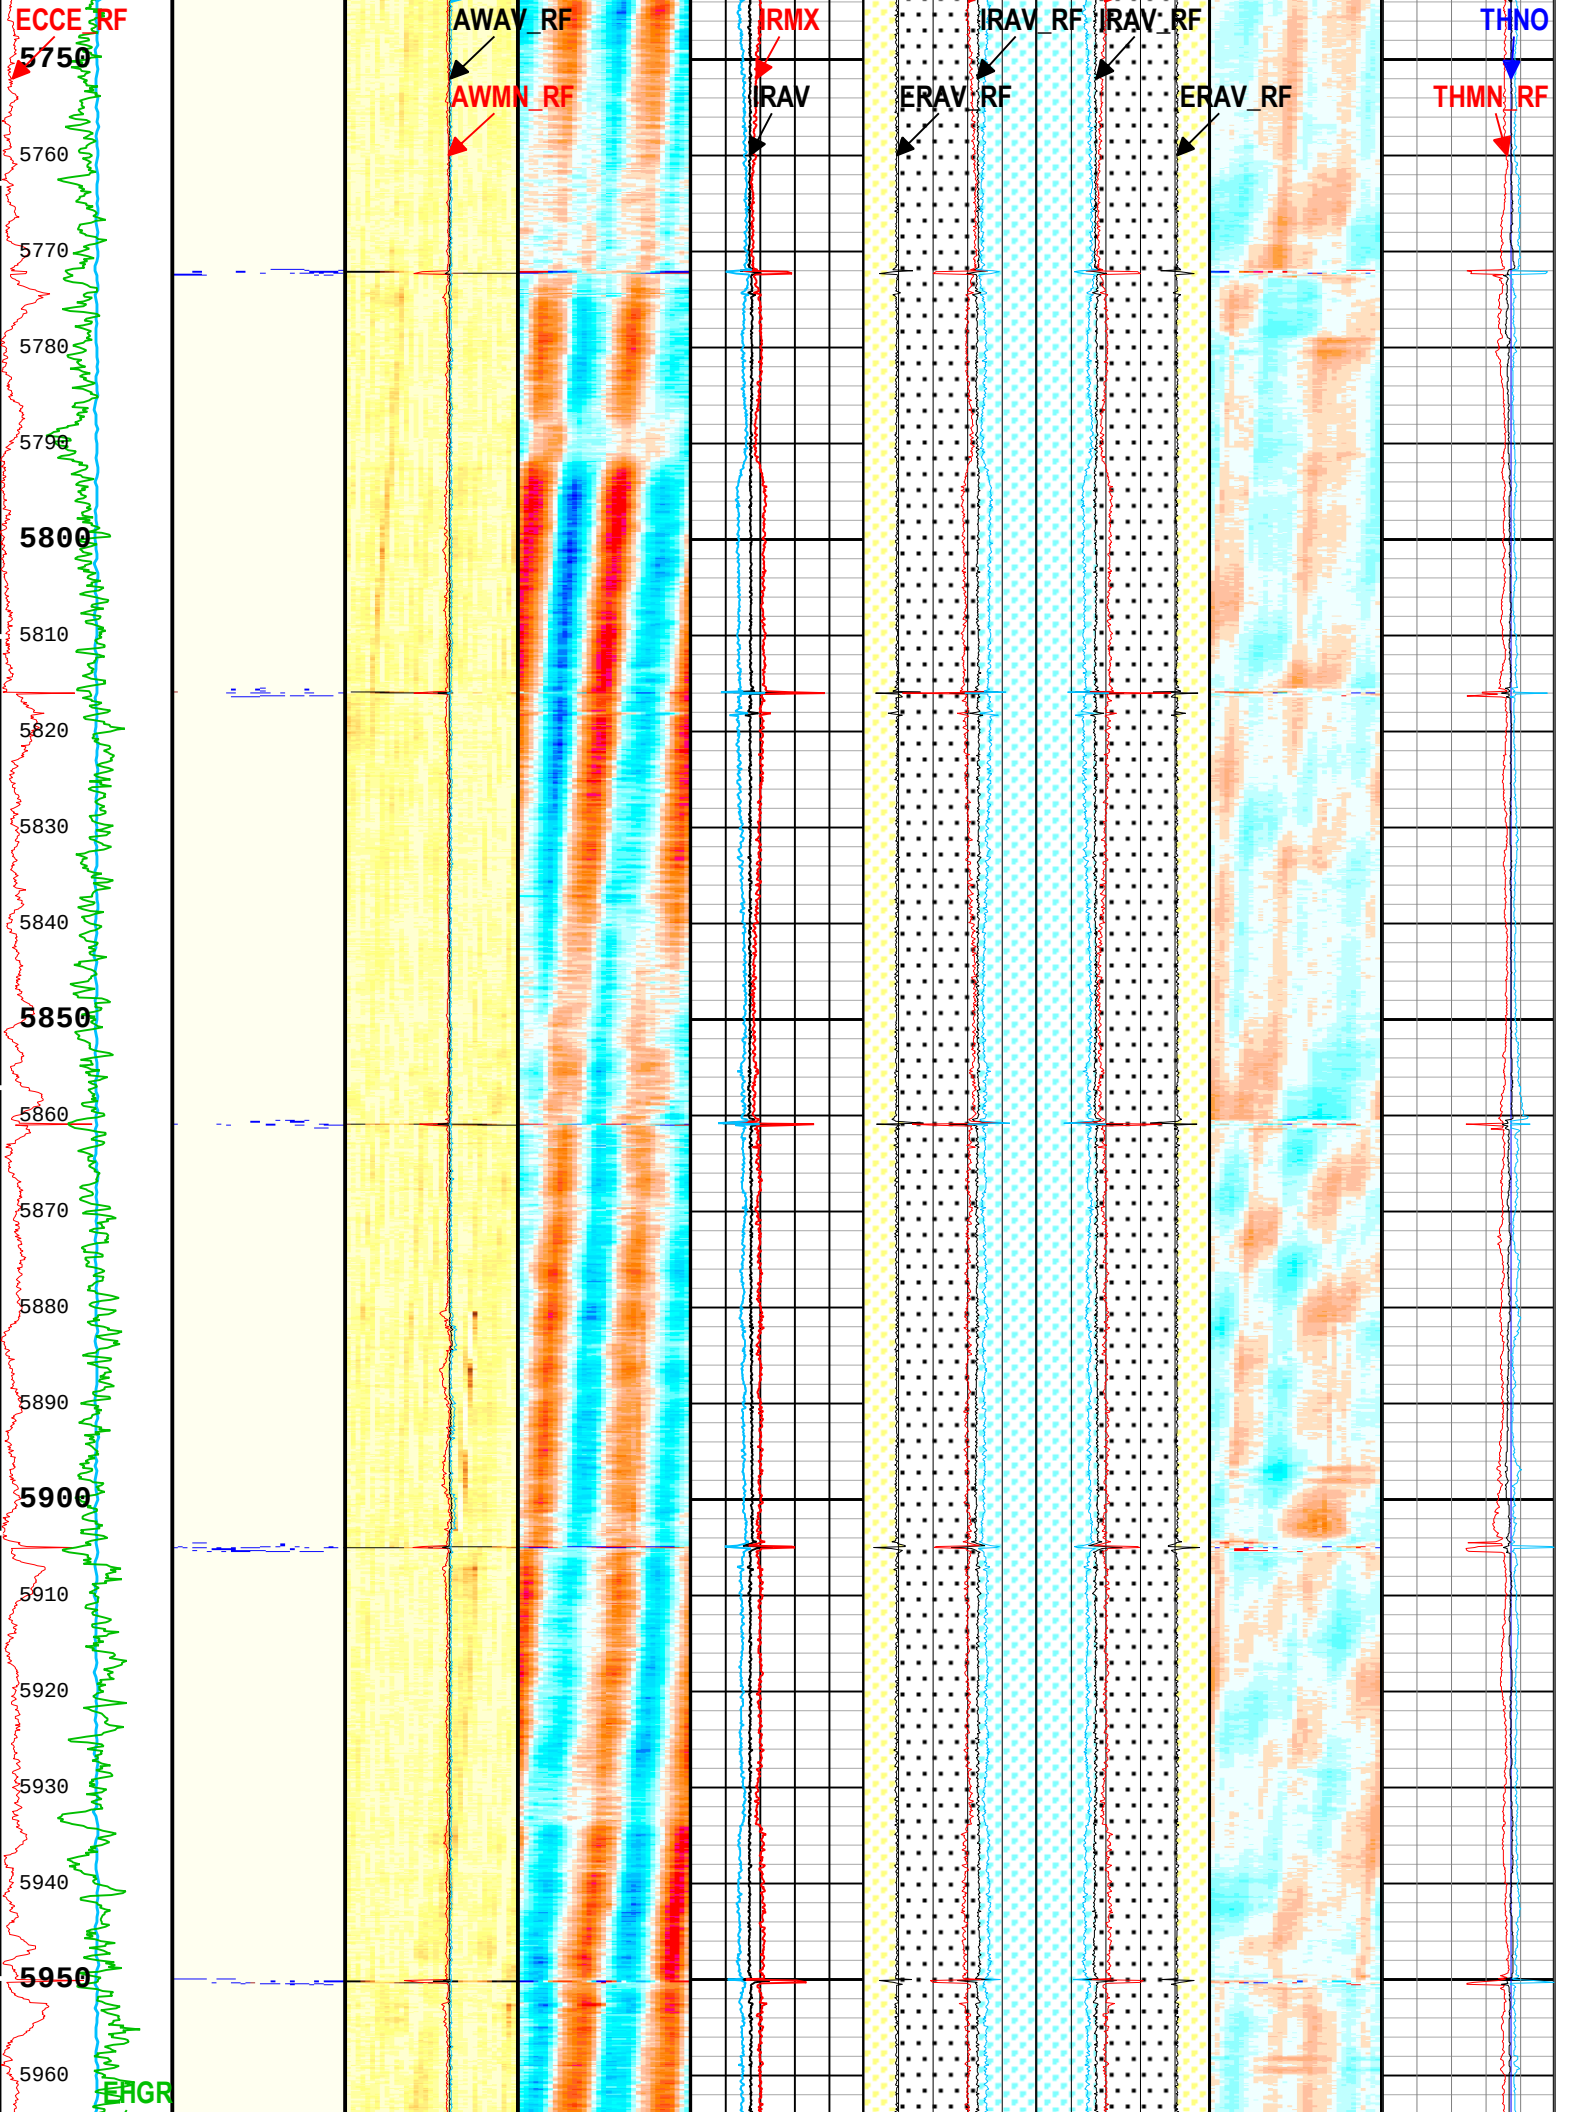
ECCE_RF
AWAV_RF
AWMN_RF
IRMX
IRAV
IRAV_RF
ERAV_RF
IRAV_RF
ERAV_RF
THNO
THMN_RF
5750
5760
5770
5780
5790
5800
5810
5820
5830
5840
5850
5860
5870
5880
5890
5900
5910
5920
5930
5940
5950
5960
EHGR

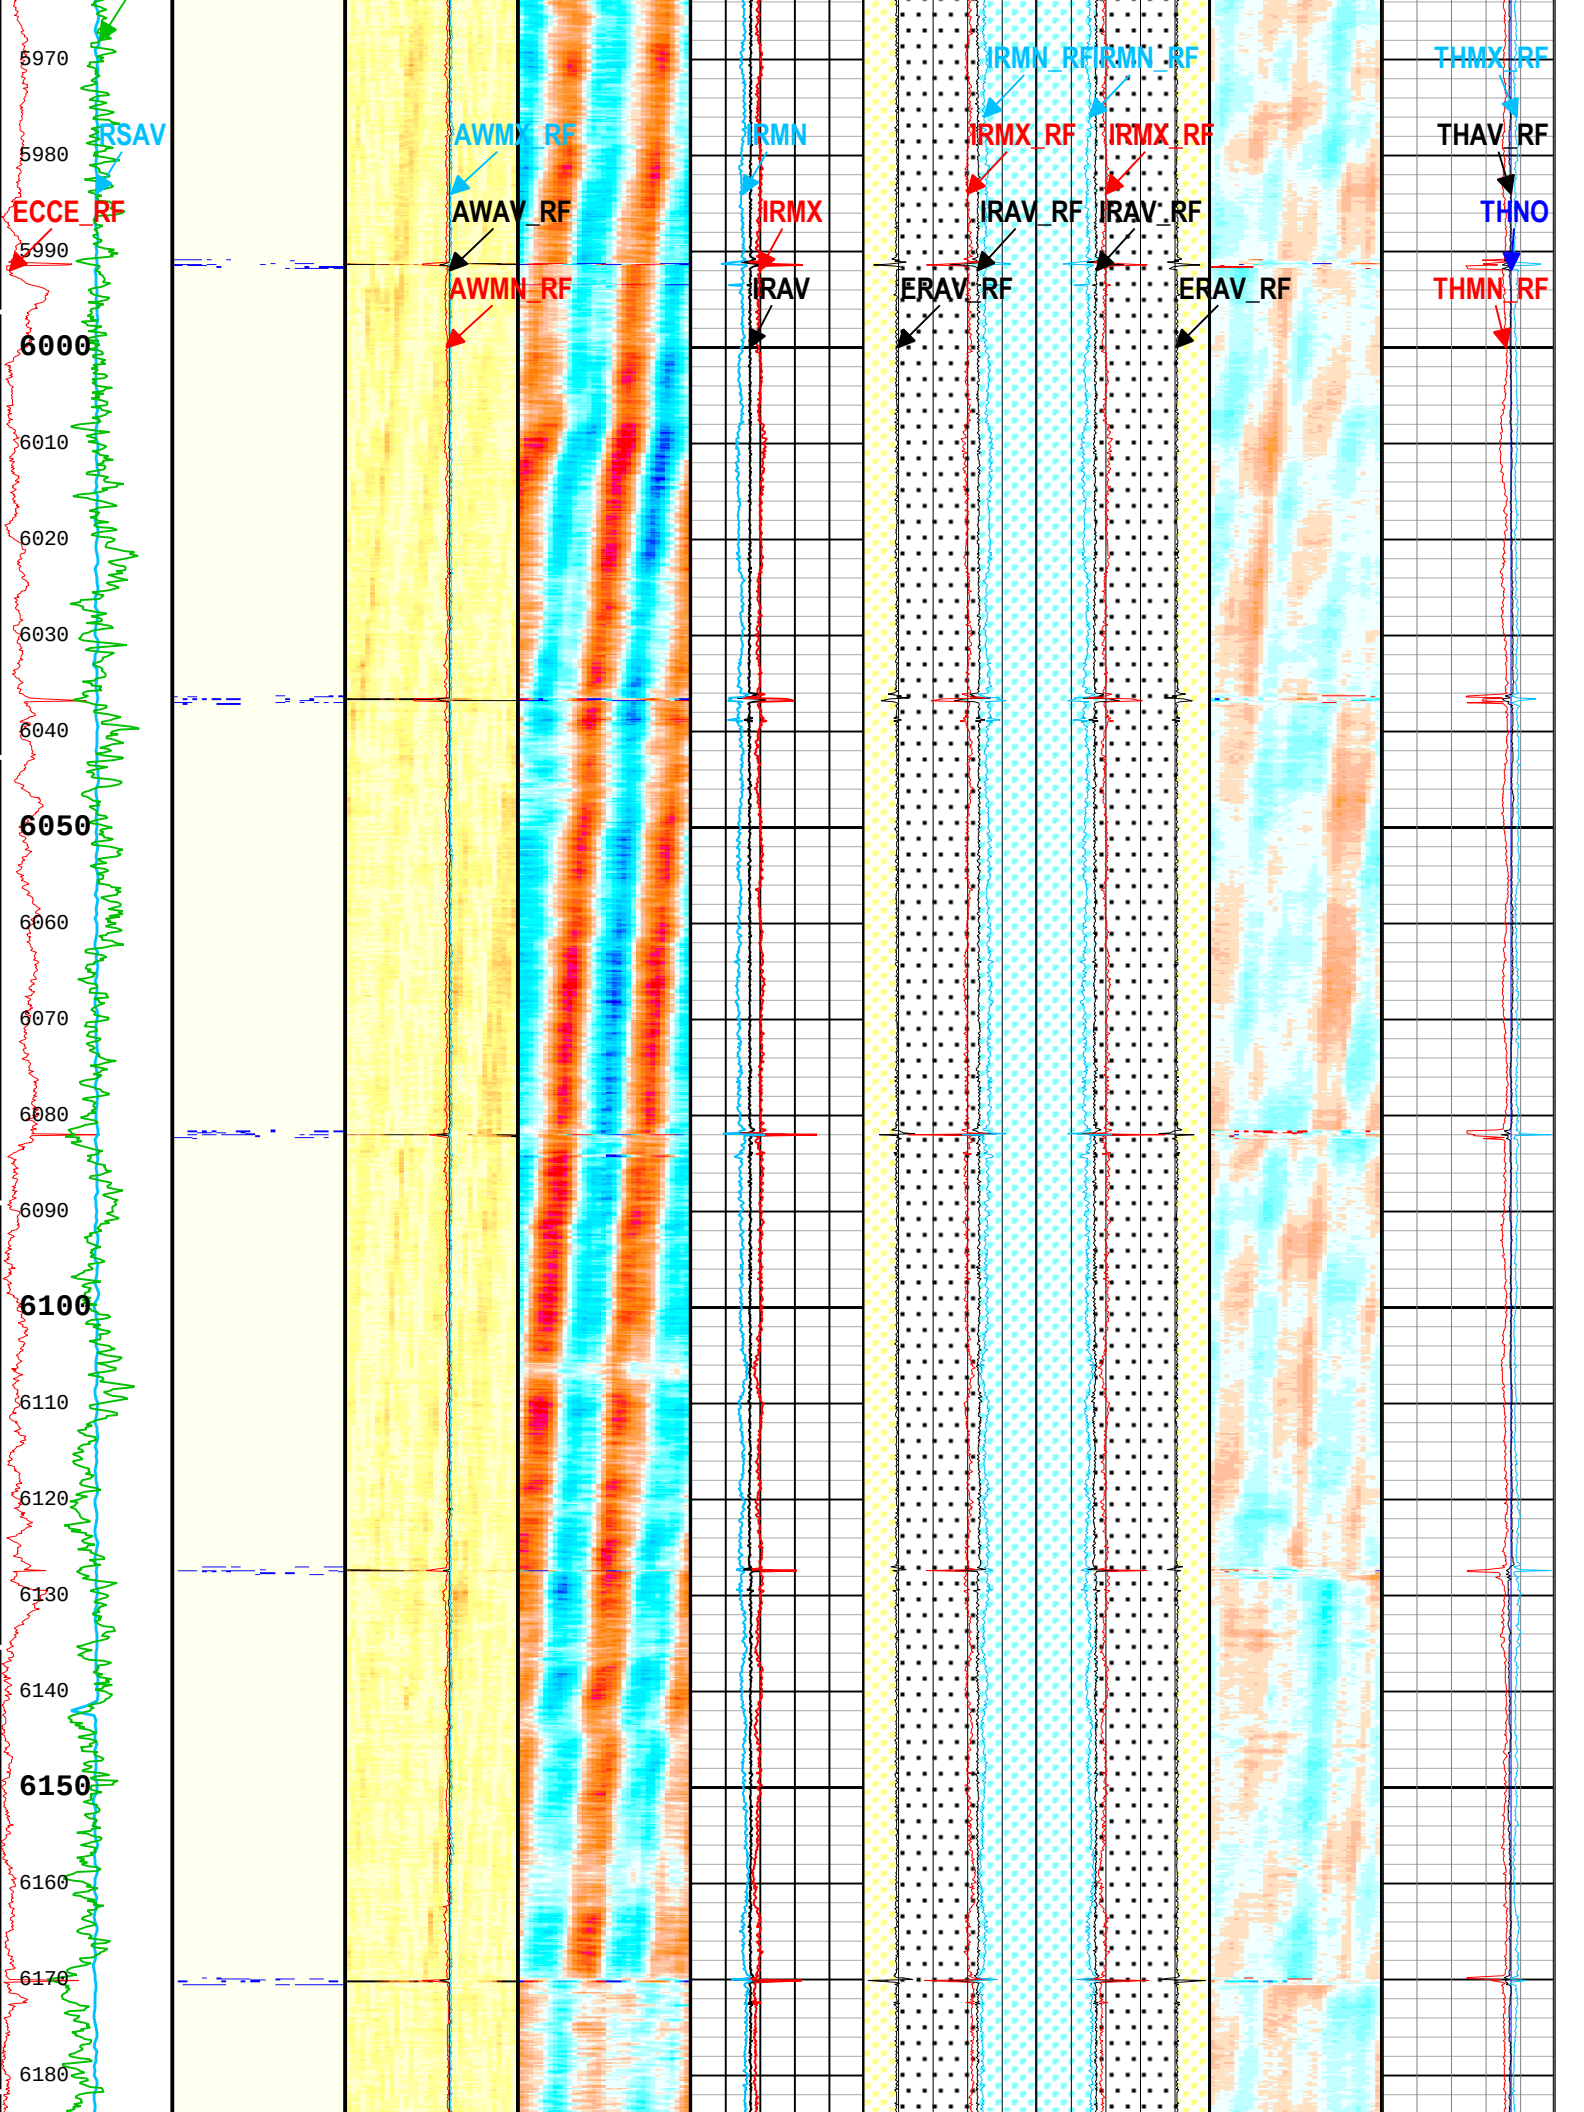
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
5970
5980
5990
6000
6010
6020
6030
6040
6050
6060
6070
6080
6090
6100
6110
6120
6130
6140
6150
6160
6170
6180

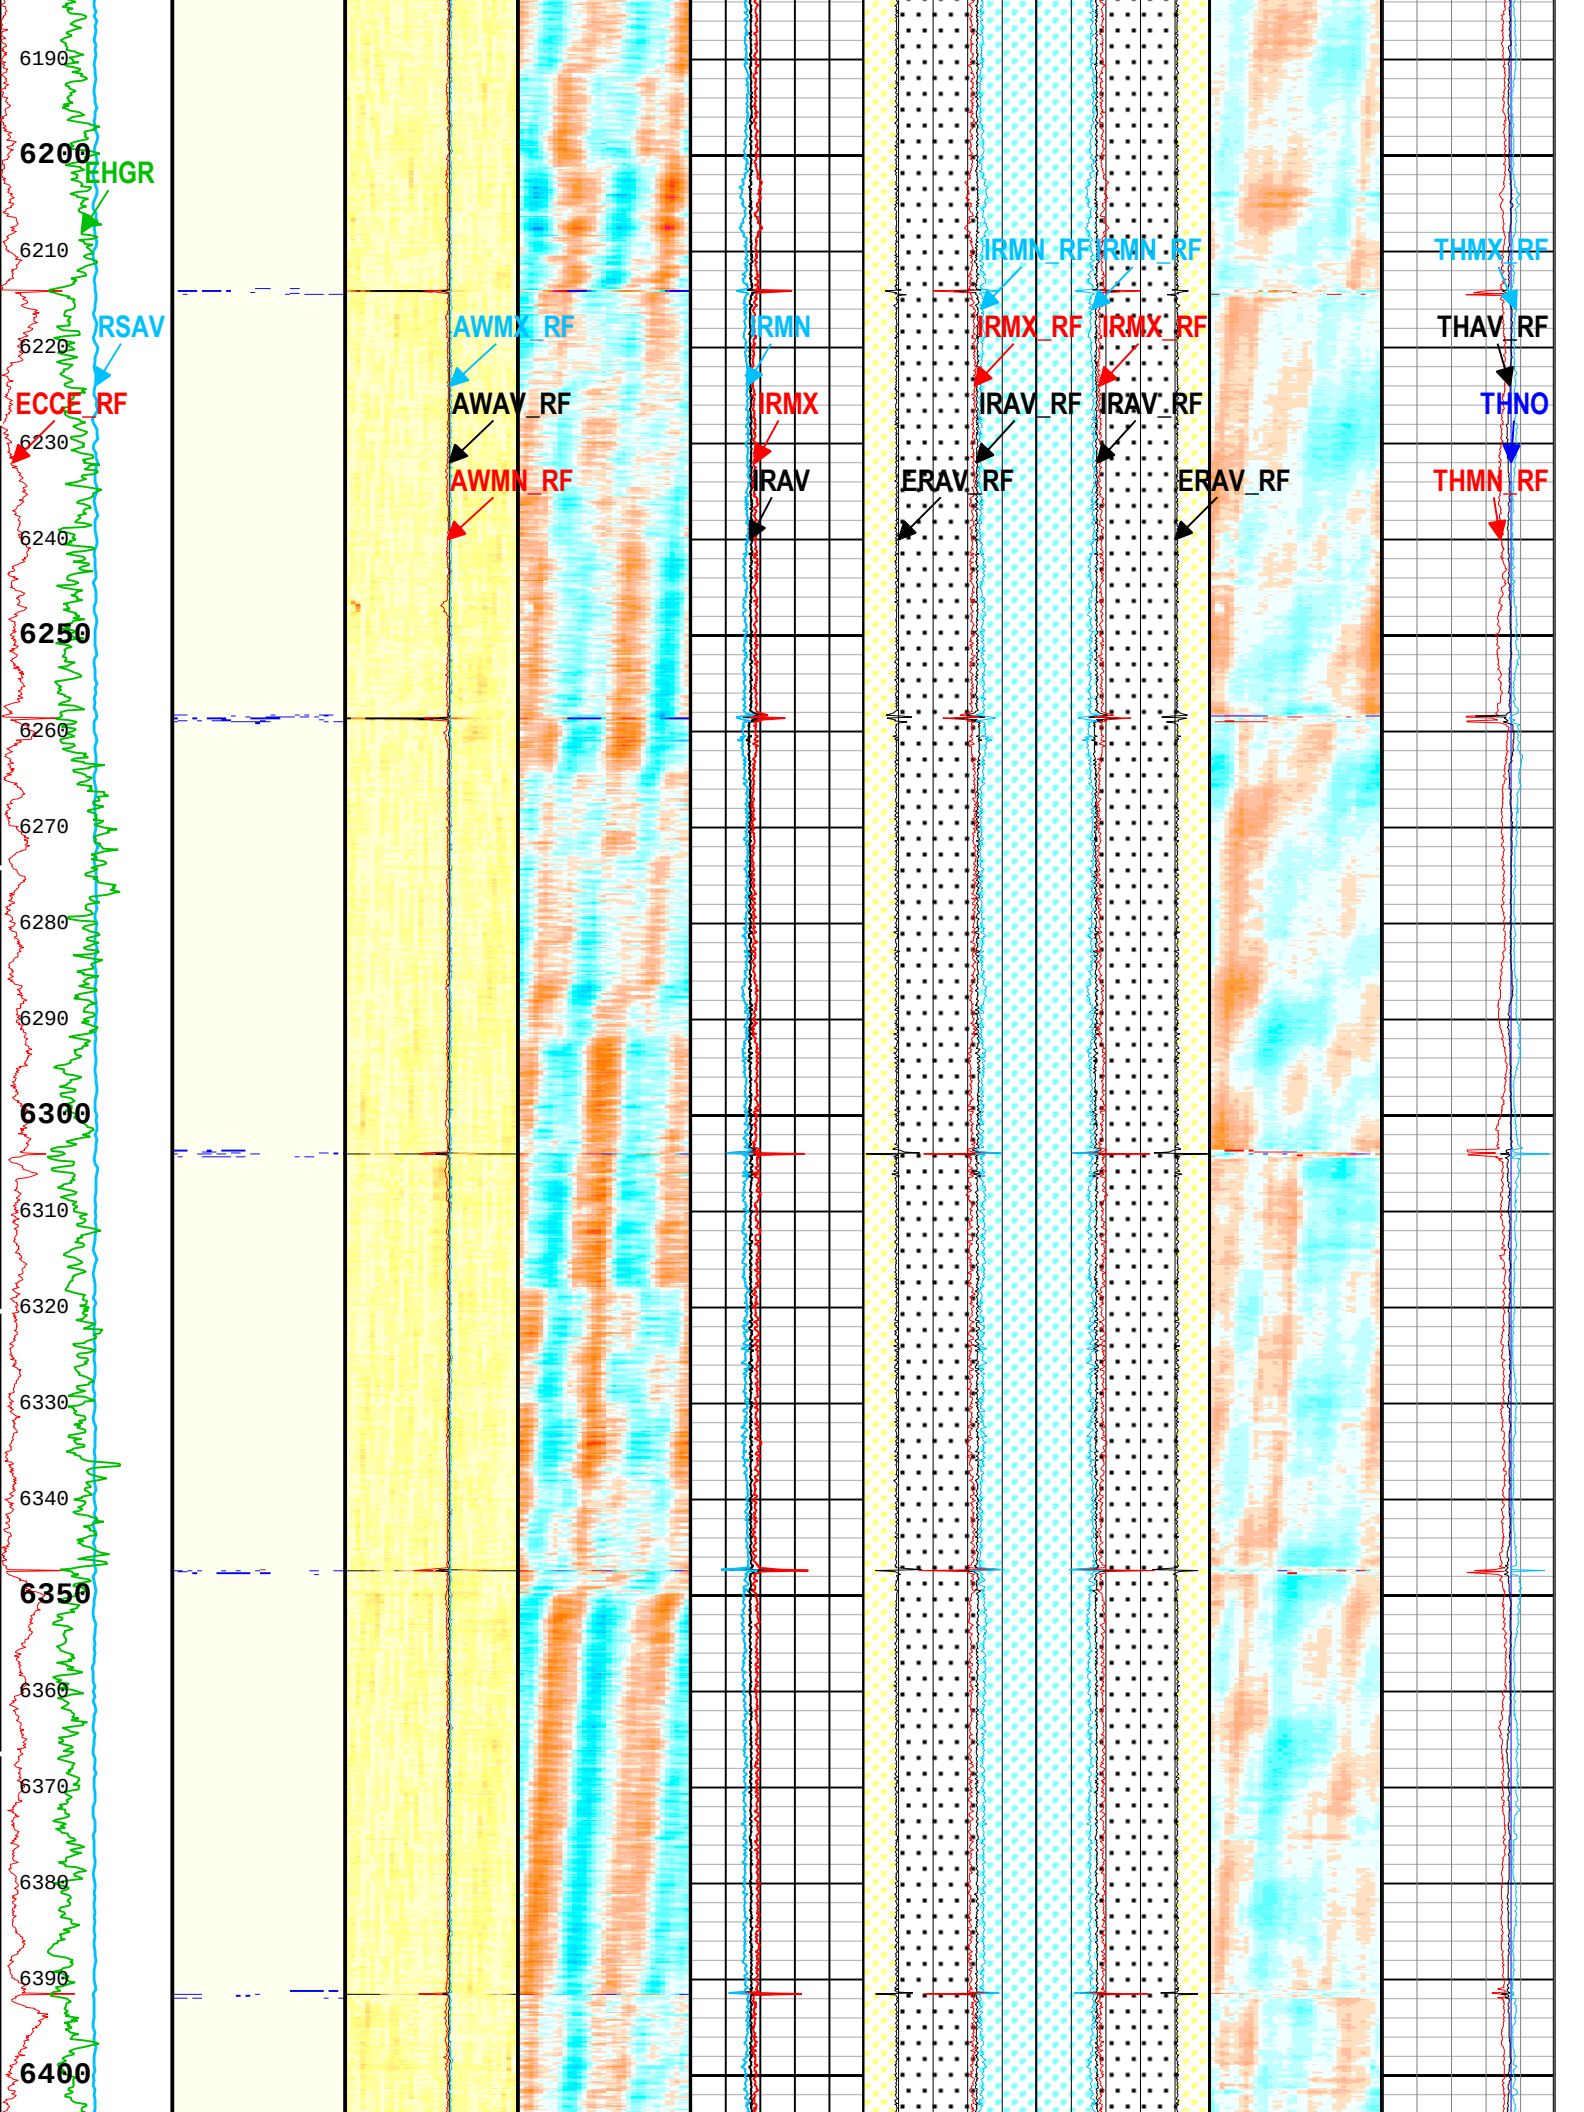
6190
6200
6210
6220
6230
6240
6250
6260
6270
6280
6290
6300
6310
6320
6330
6340
6350
6360
6370
6380
6390
6400
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

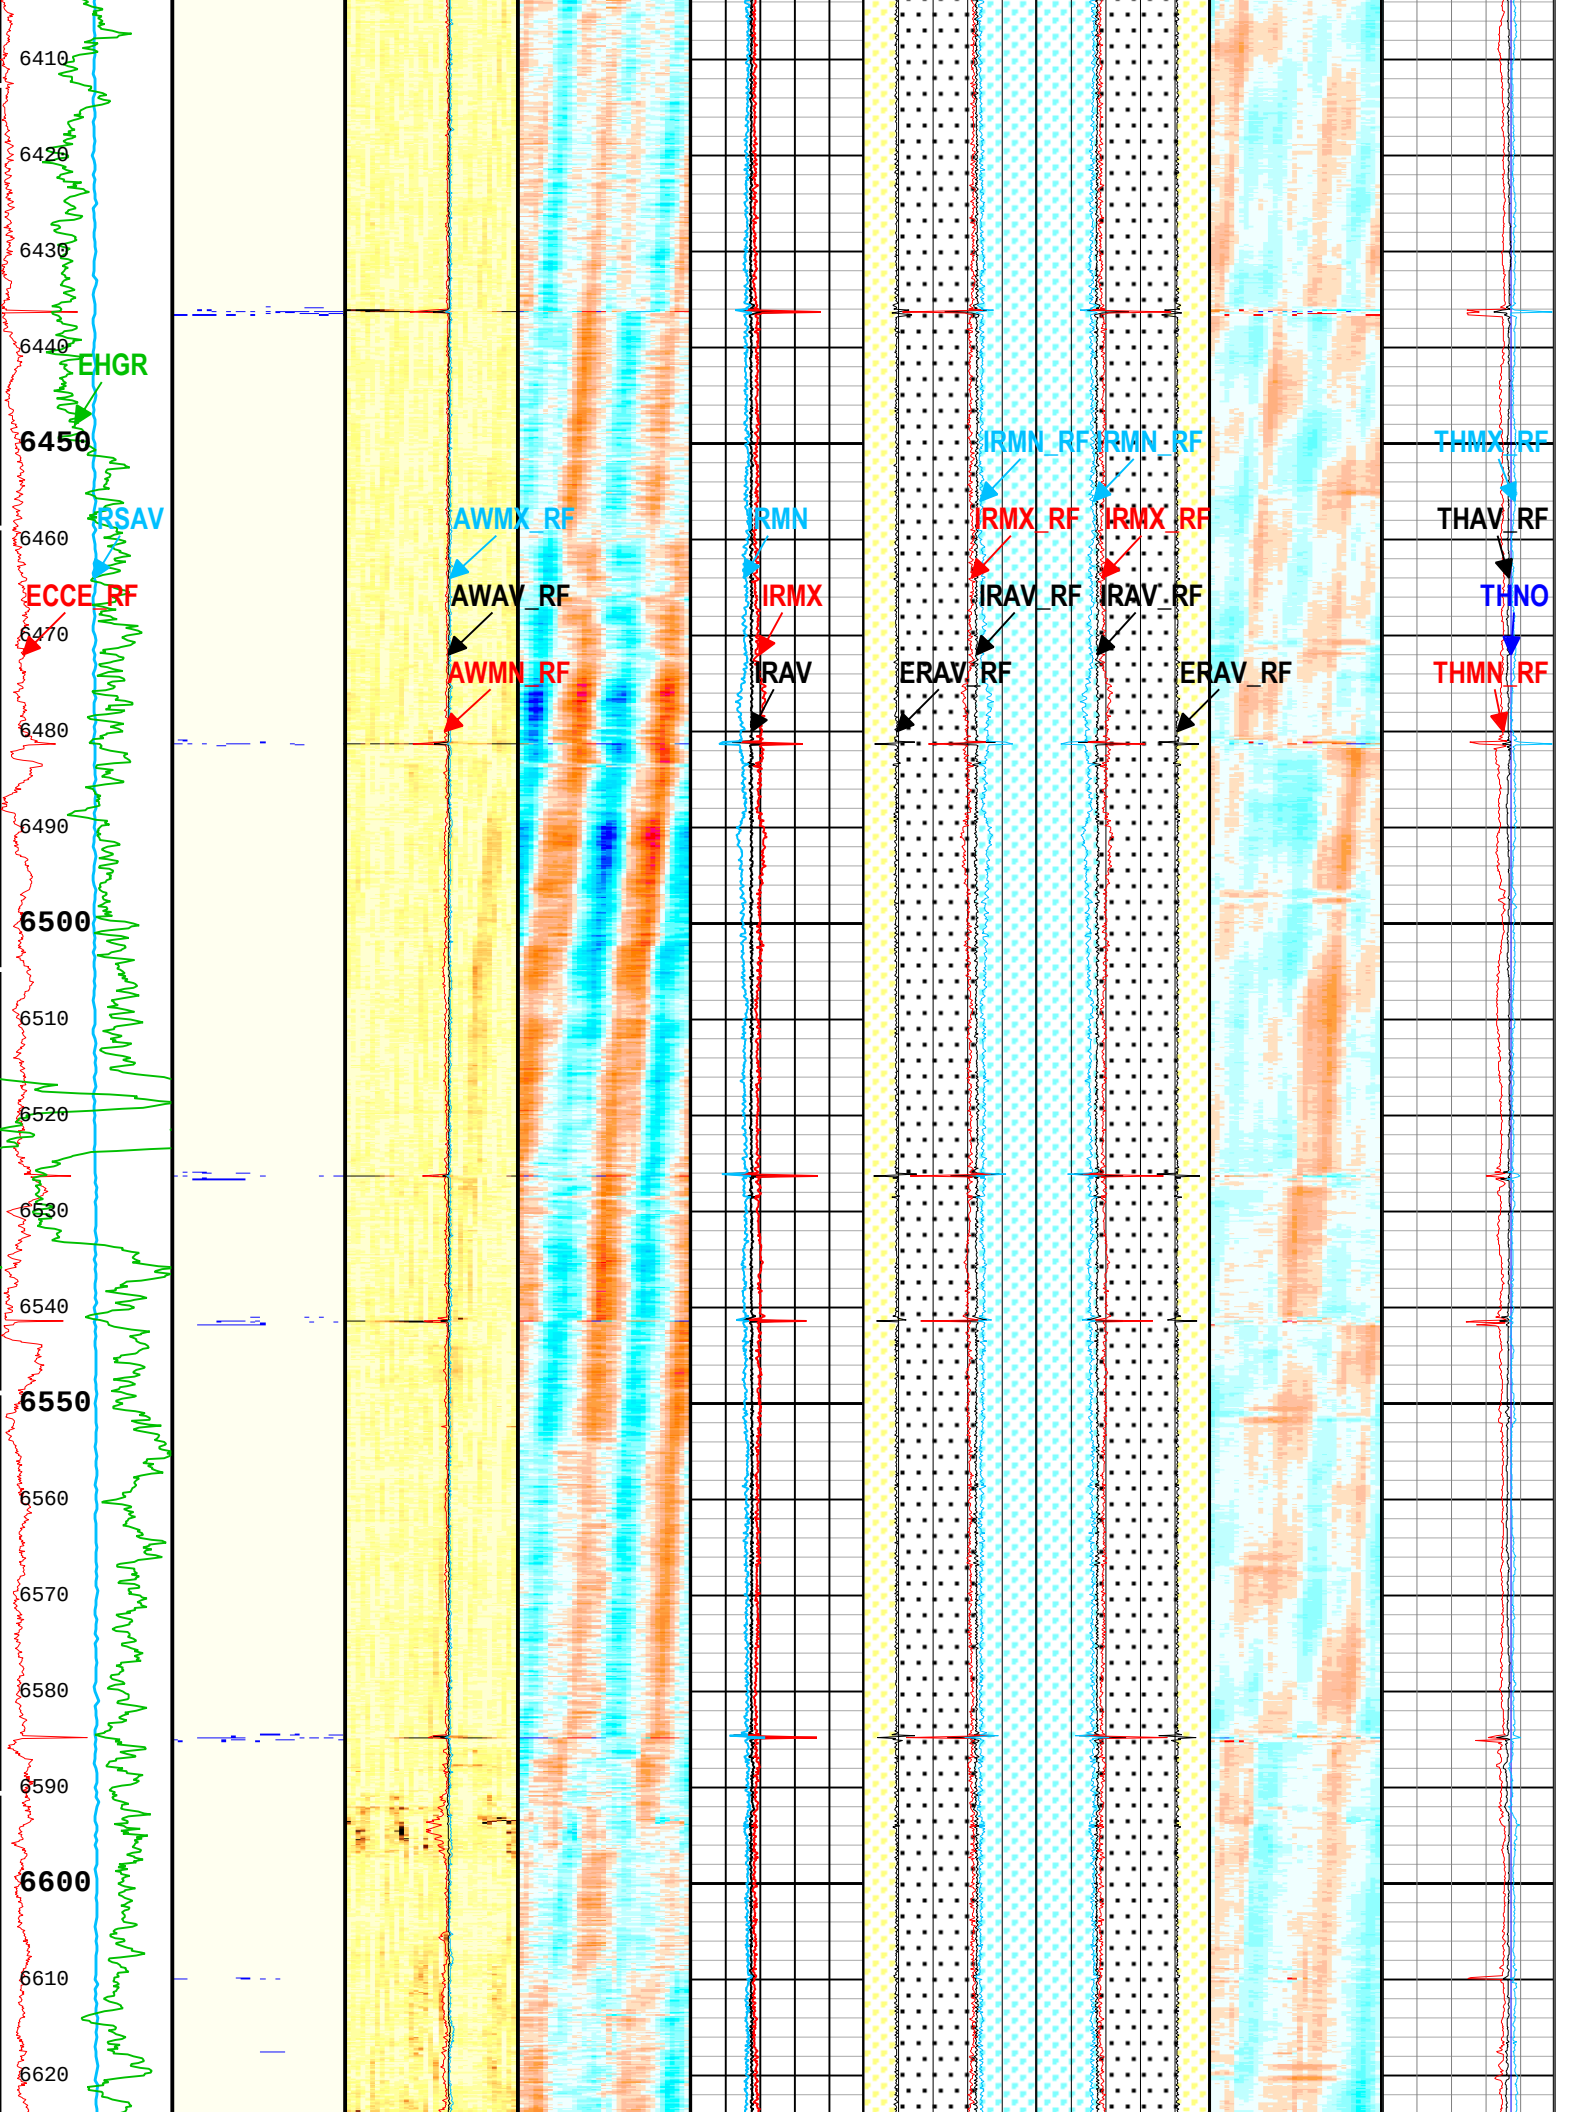
6410
6420
6430
6440
EHGR
6450
RSAV
6460
ECCE_RF
6470
6480
6490
6500
6510
6520
6530
6540
6550
6560
6570
6580
6590
6600
6610
6620
AWMX_RF
AWAV_RF
AWMN_RF
IRMN
IRMX
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

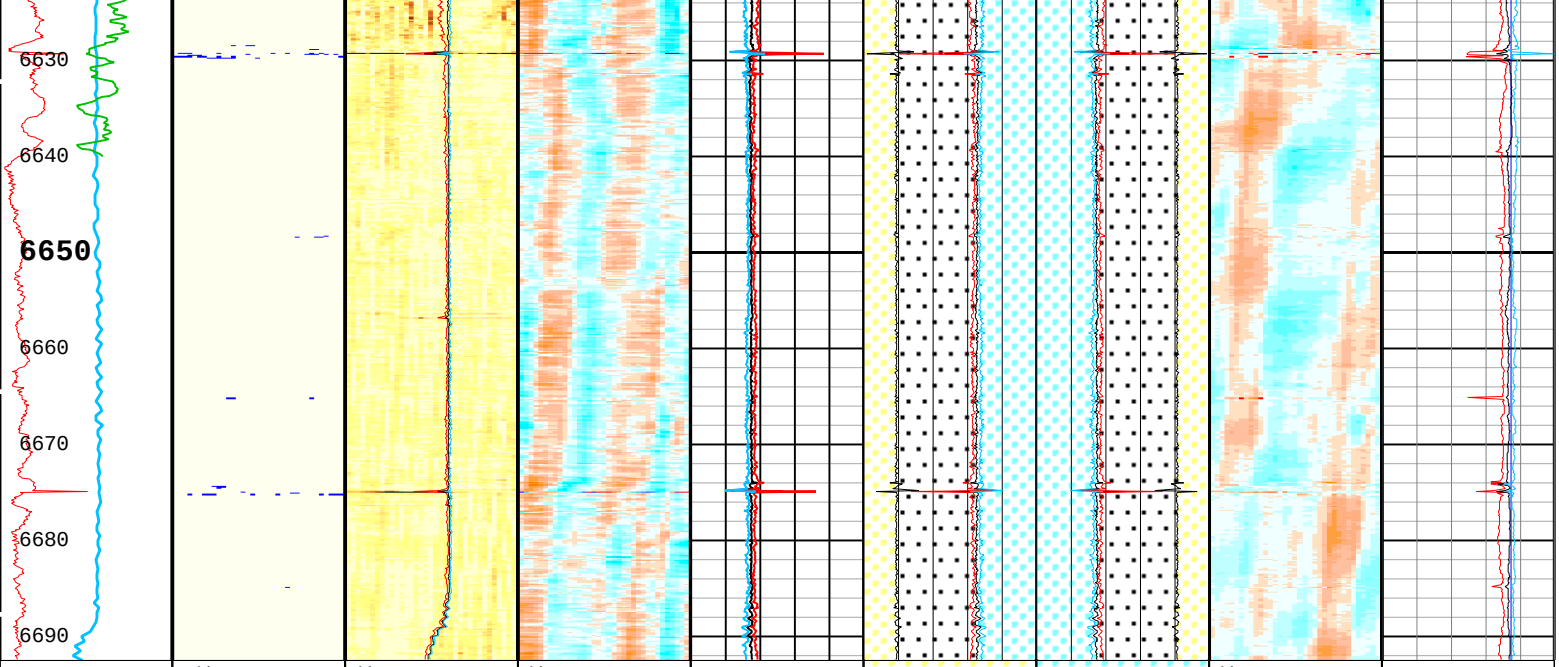

Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E[1]
0 in 0.5

Motor Revolution Speed (RSAV) USIT-E[1]
6 c/s 8

Gamma Ray (EHGR) HGNS[1]
0 gAPI 150

Absent 1.500 3.500
Explicit Normalization
USIT - USIT Processing Flags (UFLG) USIT-E[1]

USIT Processing Flags (UFLG[0]) USIT-E[1]
1 5

Absent -5.200 -3.600 -2.000 -0.400
Explicit Normalization
USIT - Amplitude of Unflagged Wave (AWBK_RF) USIT-E[1]
(dB)

Minimum of Unflagged Wave Amplitude (AWMN_RF) USIT-E[1]
0 dB 75

Average of Unflagged Wave Amplitude (AWAV_RF) USIT-E[1]
0 dB 75

Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E[1]
0 dB 75

Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E[1]
(in)

Internal Radius Averaged Value (IRAV) USIT-E[1]
4 in 5

Internal Radius Maximum Value (IRMX) USIT-E[1]
4 in 5

Internal Radius Minimum Value (IRMN) USIT-E[1]
4 in 5

ERAV
ERAV-IRAV
IRAV

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
5 in 4

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
5 in 4

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
5 in 4

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
5 in 4

IRAV
ERAV
IRAV-ERAV

Median of Unflagged External Radii (ERAV_RF) USIT-E[1]
4 in 5

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E[1]
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E[1]
4 in 5

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E[1]
4 in 5

Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E[1]
(in)

Minimum of Unflagged Casing Thickness (THMN_RF) USIT-E[1]
0.1 in 0.6

Nominal Casing Thickness (THNO) USIT-E[1]
0.1 in 0.6

Median of Unflagged Casing Thickness (THAV_RF) USIT-E[1]
0.1 in 0.6

Maximum of Unflagged Casing Thickness (THMX_RF) USIT-E[1]
0.1 in 0.6

USIT Processing Flags (UFLG[0]) USIT-E[1]

1 - UFLG 1 Value within [0.0 - 1.5] - :
2 - UFLG 2 Value within [1.5 - 2.5] - :
3 - UFLG 3 Value within [2.5 - 3.5] - :
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :

UTIM Error
Pulse Origin Not Detected
WINLEN Error
Casing Thickness Error

5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - : Loop Processing Error

TIME_1900 - Time Marked every 60.00 (s)

Description: USI Composite Format: Log (LBV1_USI Corrosion 9.625inch) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth
Creation Date: 28-Jun-2016 19:08:54

Composite 1

USI Compressed Goodwin

Composite Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
28Jun2016	Log[3]:Up	Up	90.40 ft	6692.79 ft	28-Jun-2016 8:34:23 AM	28-Jun-2016 11:17:22 AM	ON	0.00 ft	Yes
28Jun2016	Log[7]:Up	Up	23.45 ft	330.21 ft	28-Jun-2016 1:20:55 PM	28-Jun-2016 1:39:36 PM	ON	6.00 ft	Yes

All depths are referenced to toolstring zero

Log

Company:Southern California Gas Company Well:Porter 72B
Composite 1:S005

Description: USI Goodwin Format: Log (Import of USI Goodwin) Index Scale: 0.1 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 28-Jun-2016 19:09:35

TIME_1900 - Time Marked every 60.00 (s)

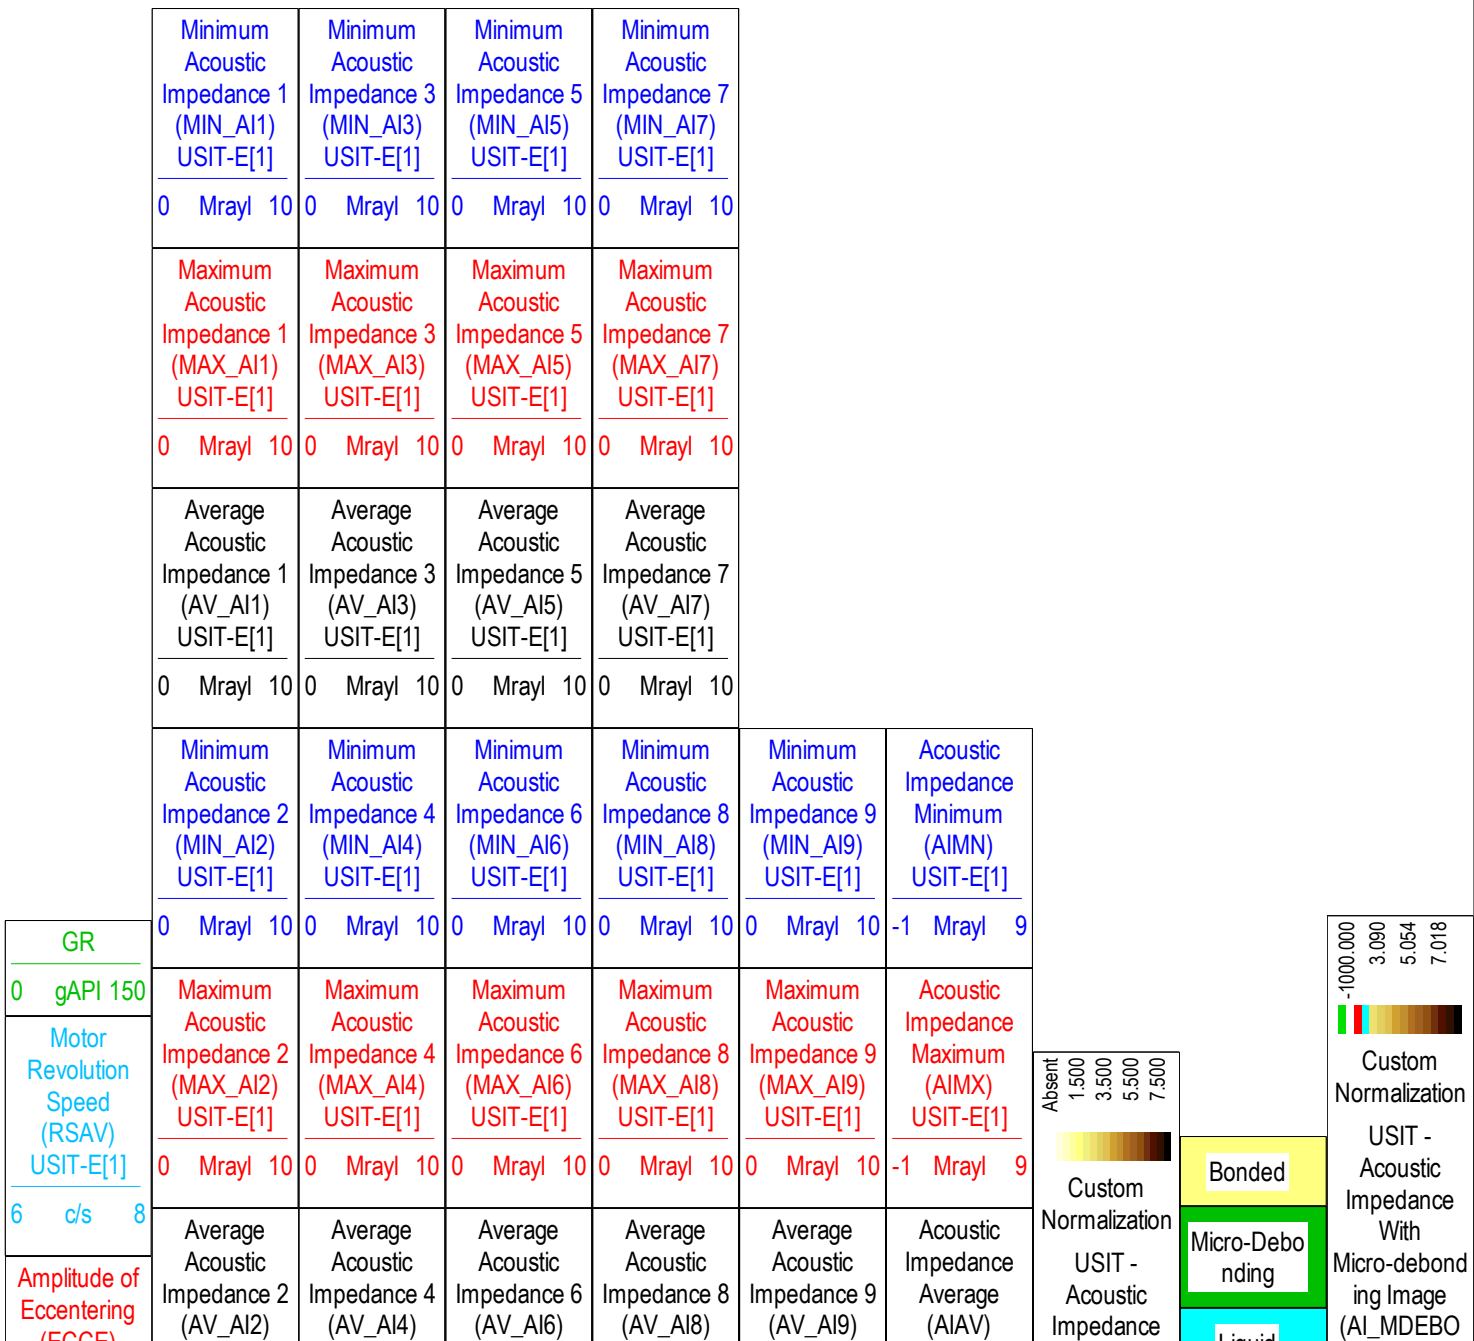

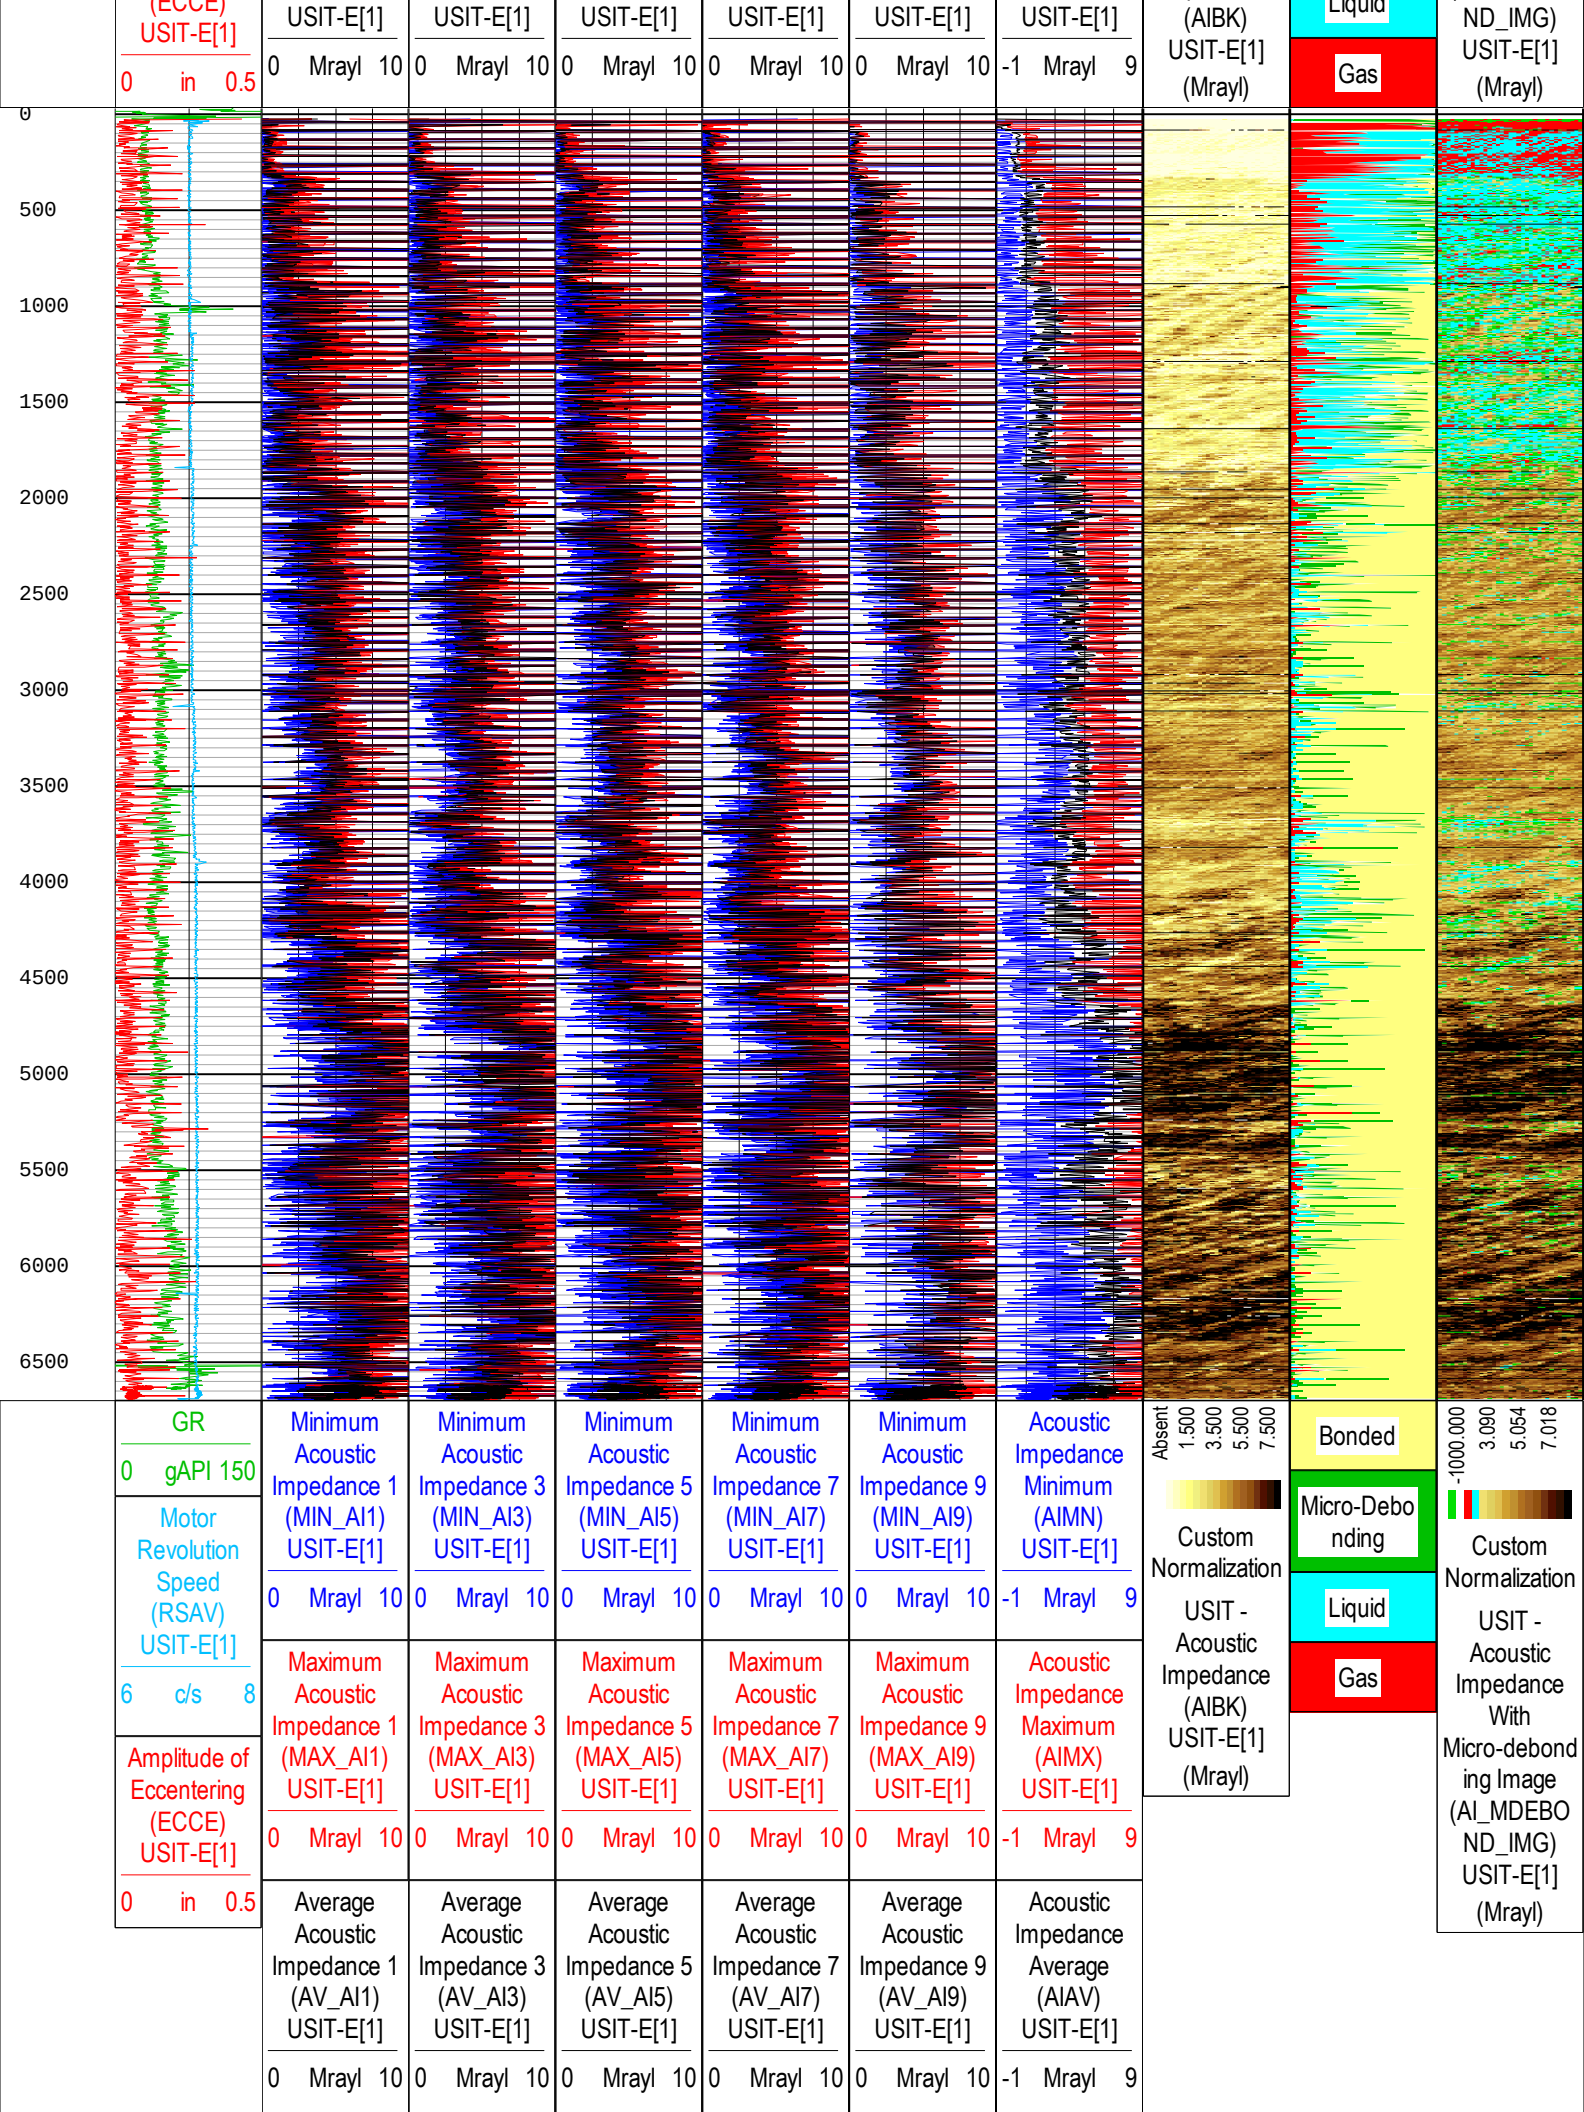
(ECCE)
USIT-E[1]
0 in 0.5
USIT-E[1]
0 Mrayl 10
USIT-E[1]
0 Mrayl 10
USIT-E[1]
0 Mrayl 10
USIT-E[1]
0 Mrayl 10
USIT-E[1]
0 Mrayl 10
USIT-E[1]
-1 Mrayl 9
(AIBK)
USIT-E[1]
(Mrayl)
Liquid
Gas
ND_IMG)
USIT-E[1]
(Mrayl)
0
500
1000
1500
2000
2500
3000
3500
4000
4500
5000
5500
6000
6500
GR
0 gAPI 150
Motor Revolution Speed (RSAV) USIT-E[1]
6 c/s 8
Amplitude of Eccentering (ECCE) USIT-E[1]
0 in 0.5
Minimum Acoustic Impedance 1 (MIN_AI1) USIT-E[1]
0 Mrayl 10
Minimum Acoustic Impedance 3 (MIN_AI3) USIT-E[1]
0 Mrayl 10
Minimum Acoustic Impedance 5 (MIN_AI5) USIT-E[1]
0 Mrayl 10
Minimum Acoustic Impedance 7 (MIN_AI7) USIT-E[1]
0 Mrayl 10
Minimum Acoustic Impedance 9 (MIN_AI9) USIT-E[1]
0 Mrayl 10
Acoustic Impedance Minimum (AIMN) USIT-E[1]
-1 Mrayl 9
Maximum Acoustic Impedance 1 (MAX_AI1) USIT-E[1]
0 Mrayl 10
Maximum Acoustic Impedance 3 (MAX_AI3) USIT-E[1]
0 Mrayl 10
Maximum Acoustic Impedance 5 (MAX_AI5) USIT-E[1]
0 Mrayl 10
Maximum Acoustic Impedance 7 (MAX_AI7) USIT-E[1]
0 Mrayl 10
Maximum Acoustic Impedance 9 (MAX_AI9) USIT-E[1]
0 Mrayl 10
Acoustic Impedance Maximum (AIMX) USIT-E[1]
-1 Mrayl 9
Average Acoustic Impedance 1 (AV_AI1) USIT-E[1]
0 Mrayl 10
Average Acoustic Impedance 3 (AV_AI3) USIT-E[1]
0 Mrayl 10
Average Acoustic Impedance 5 (AV_AI5) USIT-E[1]
0 Mrayl 10
Average Acoustic Impedance 7 (AV_AI7) USIT-E[1]
0 Mrayl 10
Average Acoustic Impedance 9 (AV_AI9) USIT-E[1]
0 Mrayl 10
Acoustic Impedance Average (AIAV) USIT-E[1]
-1 Mrayl 9
Absent
1.500
3.500
5.500
7.500
Custom Normalization
USIT - Acoustic Impedance (AIBK) USIT-E[1] (Mrayl)
Bonded
Micro-Debonding
Liquid
Gas
-1000.000
3.090
5.054
7.018
Custom Normalization
USIT - Acoustic Impedance With Micro-debonding Image (AI_MDEBOND_IMG) USIT-E[1] (Mrayl)

Minimum Acoustic Impedance 2 (MIN_AI2) USIT-E[1] 0 Mrayl 10	Minimum Acoustic Impedance 4 (MIN_AI4) USIT-E[1] 0 Mrayl 10	Minimum Acoustic Impedance 6 (MIN_AI6) USIT-E[1] 0 Mrayl 10	Minimum Acoustic Impedance 8 (MIN_AI8) USIT-E[1] 0 Mrayl 10
Maximum Acoustic Impedance 2 (MAX_AI2) USIT-E[1] 0 Mrayl 10	Maximum Acoustic Impedance 4 (MAX_AI4) USIT-E[1] 0 Mrayl 10	Maximum Acoustic Impedance 6 (MAX_AI6) USIT-E[1] 0 Mrayl 10	Maximum Acoustic Impedance 8 (MAX_AI8) USIT-E[1] 0 Mrayl 10
Average Acoustic Impedance 2 (AV_AI2) USIT-E[1] 0 Mrayl 10	Average Acoustic Impedance 4 (AV_AI4) USIT-E[1] 0 Mrayl 10	Average Acoustic Impedance 6 (AV_AI6) USIT-E[1] 0 Mrayl 10	Average Acoustic Impedance 8 (AV_AI8) USIT-E[1] 0 Mrayl 10

TIME_1900 - Time Marked every 60.00 (s)

Description: USI Goodwin Format: Log (Import of USI Goodwin) Index Scale: 0.1 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 28-Jun-2016 19:09:35

28Jun2016

Very Hi-Res Repeat 10 IN = 100 Ft

Software Version

Acquisition System	Version
Maxwell 2016 SP1	6.1.58882.3100

Pass Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
28Jun2016	Log[6]:Up	Up	884.35 ft	1039.04 ft	28-Jun-2016 1:06:09 PM	28-Jun-2016 1:16:09 PM	ON	6.00 ft	Yes

All depths are referenced to toolstring zero

Log

Company:Southern California Gas Company Well:Porter 72B

28Jun2016: Log[6]:Up:S005

Description: USI Composite Format: Log (LBV1_USI Corrosion 9.625inch) Index Scale: 10 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 28-Jun-2016 19:09:41

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - : UTIM Error

2 - UFLG 2 Value within [1.5 - 2.5] - : Pulse Origin Not Detected

3 - UFLG 3 Value within [2.5 - 3.5] - : WINLEN Error

4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - : Casing Thickness Error

5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - : Loop Processing Error



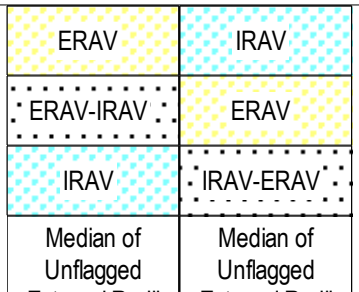

Minimum of

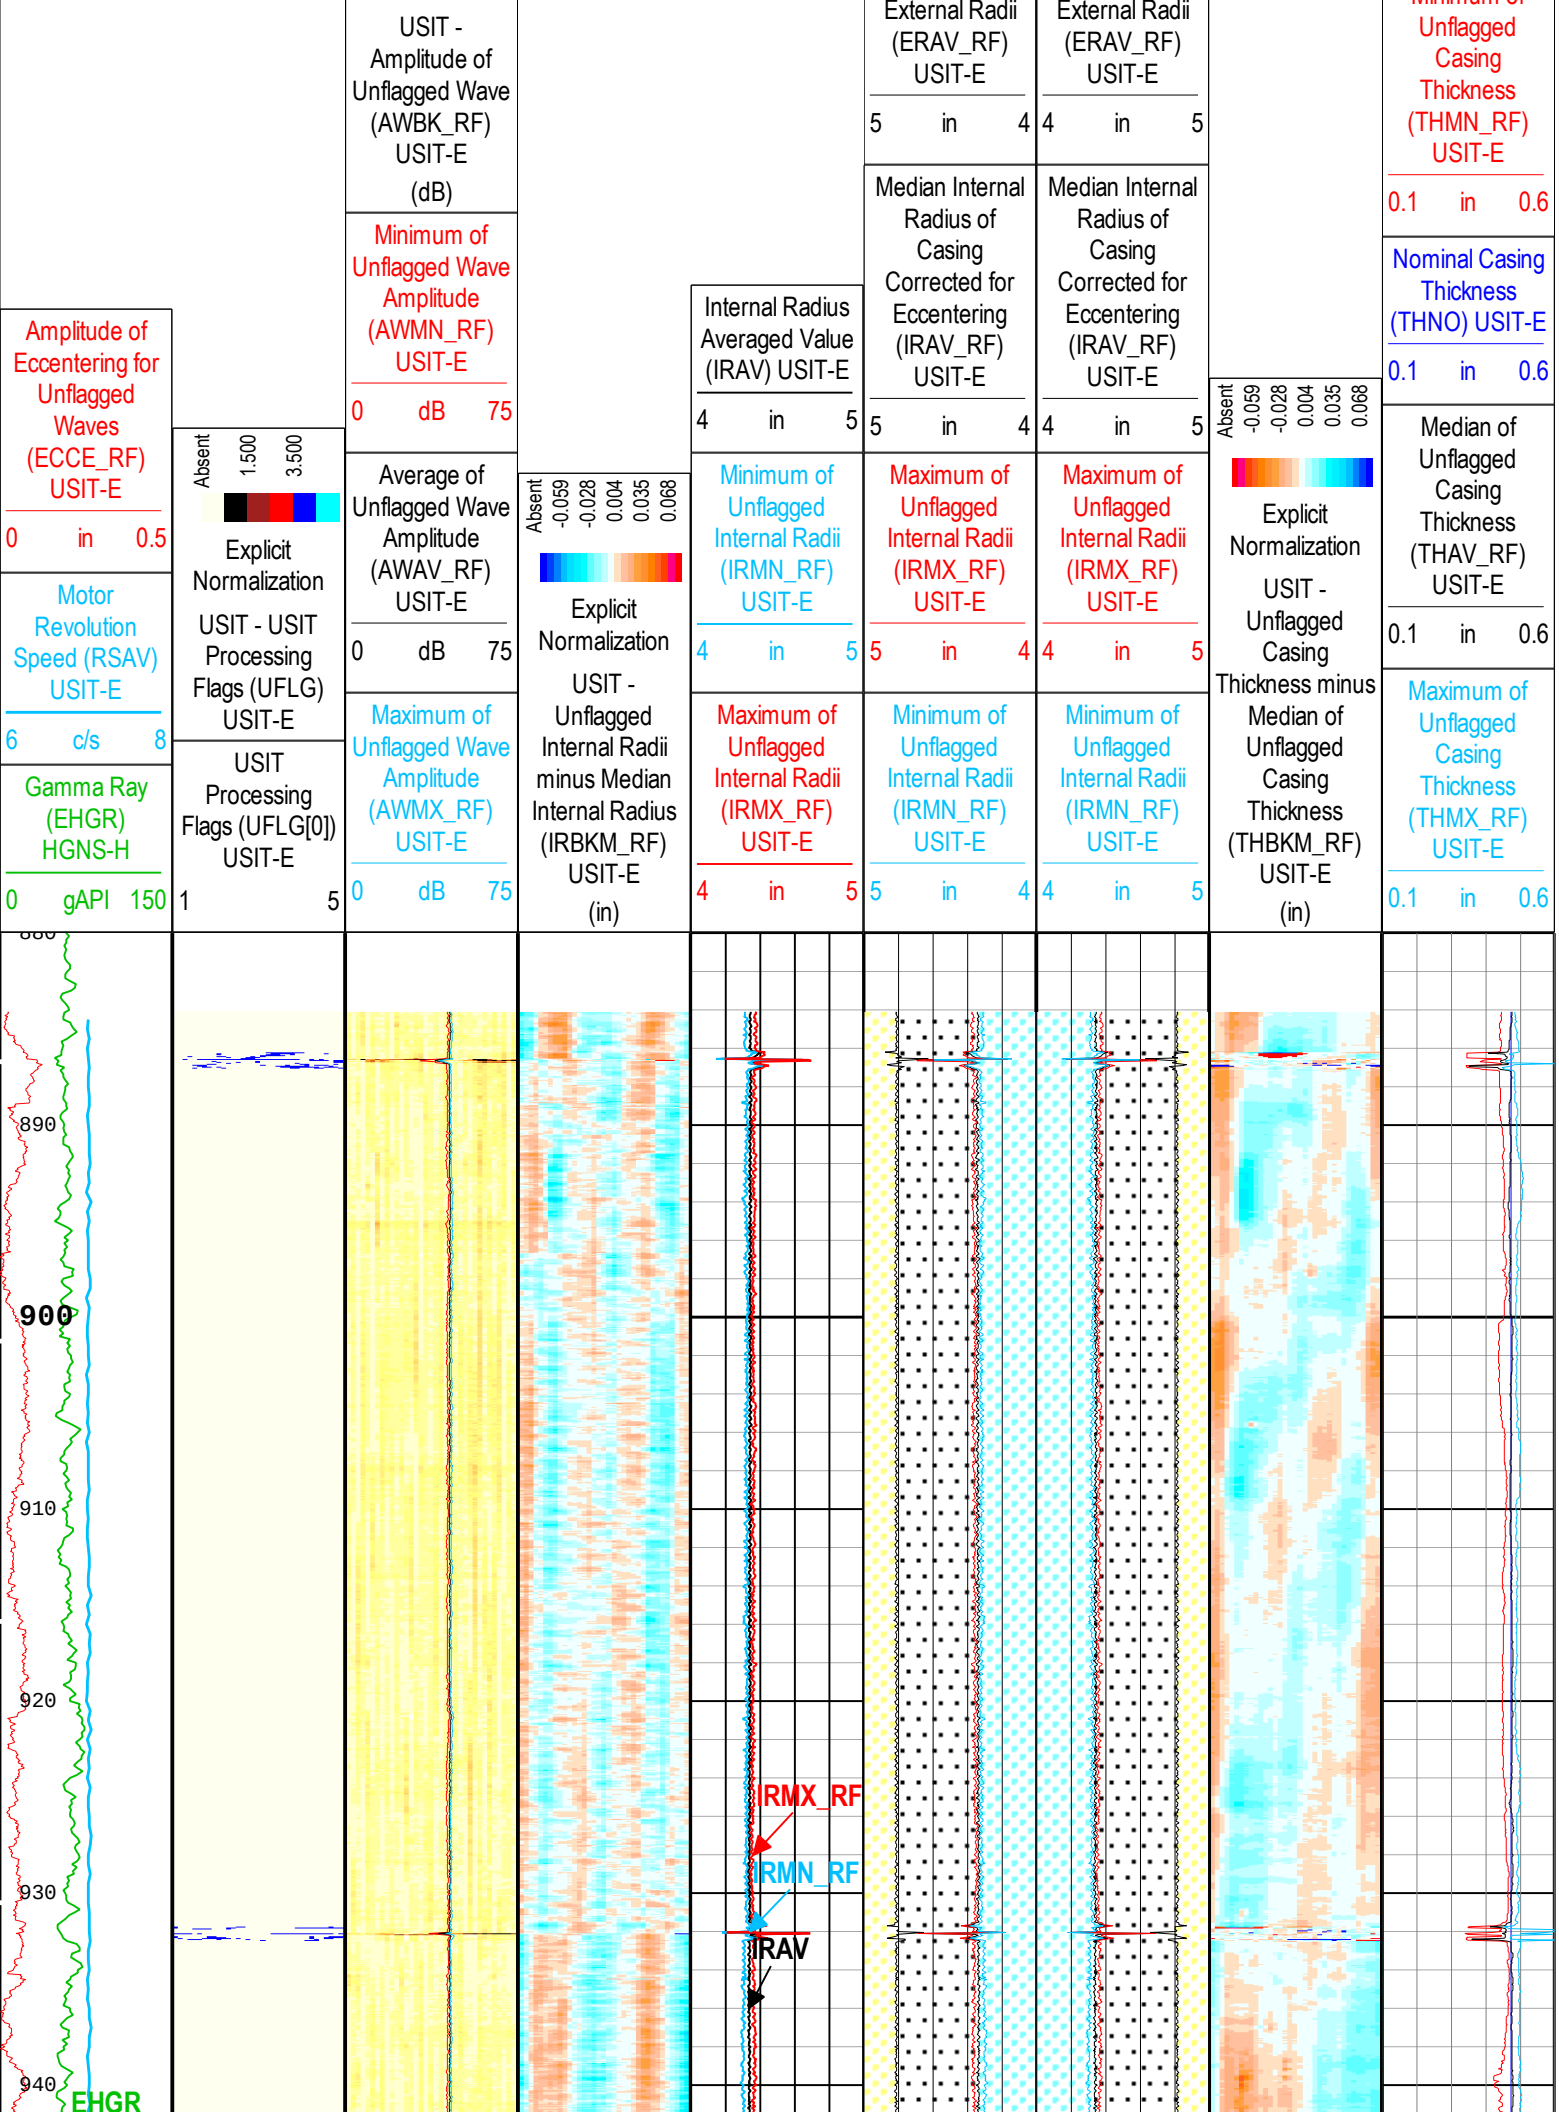
Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E
0 in 0.5
Motor Revolution Speed (RSAV) USIT-E
6 c/s 8
Gamma Ray (EHGR) HGNS-H
0 gAPI 150
Absent 1.500 3.500
Explicit Normalization
USIT - USIT Processing Flags (UFLG) USIT-E
USIT Processing Flags (UFLG[0]) USIT-E
1 5
USIT - Amplitude of Unflagged Wave (AWBK_RF) USIT-E (dB)
Minimum of Unflagged Wave Amplitude (AWMN_RF) USIT-E
0 dB 75
Average of Unflagged Wave Amplitude (AWAV_RF) USIT-E
0 dB 75
Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E
0 dB 75
Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E (in)
Internal Radius Averaged Value (IRAV) USIT-E
4 in 5
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
4 in 5
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
4 in 5
External Radii (ERAV_RF) USIT-E
5 in 4
Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
5 in 4
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
5 in 4
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
5 in 4
External Radii (ERAV_RF) USIT-E
4 in 5
Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
4 in 5
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
4 in 5
Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E (in)
Minimum of Unflagged Casing Thickness (THMN_RF) USIT-E
0.1 in 0.6
Nominal Casing Thickness (THNO) USIT-E
0.1 in 0.6
Median of Unflagged Casing Thickness (THAV_RF) USIT-E
0.1 in 0.6
Maximum of Unflagged Casing Thickness (THMX_RF) USIT-E
0.1 in 0.6
880
890
900
910
920
930
940
EHGR
IRMX_RF
IRMN_RF
IRAV

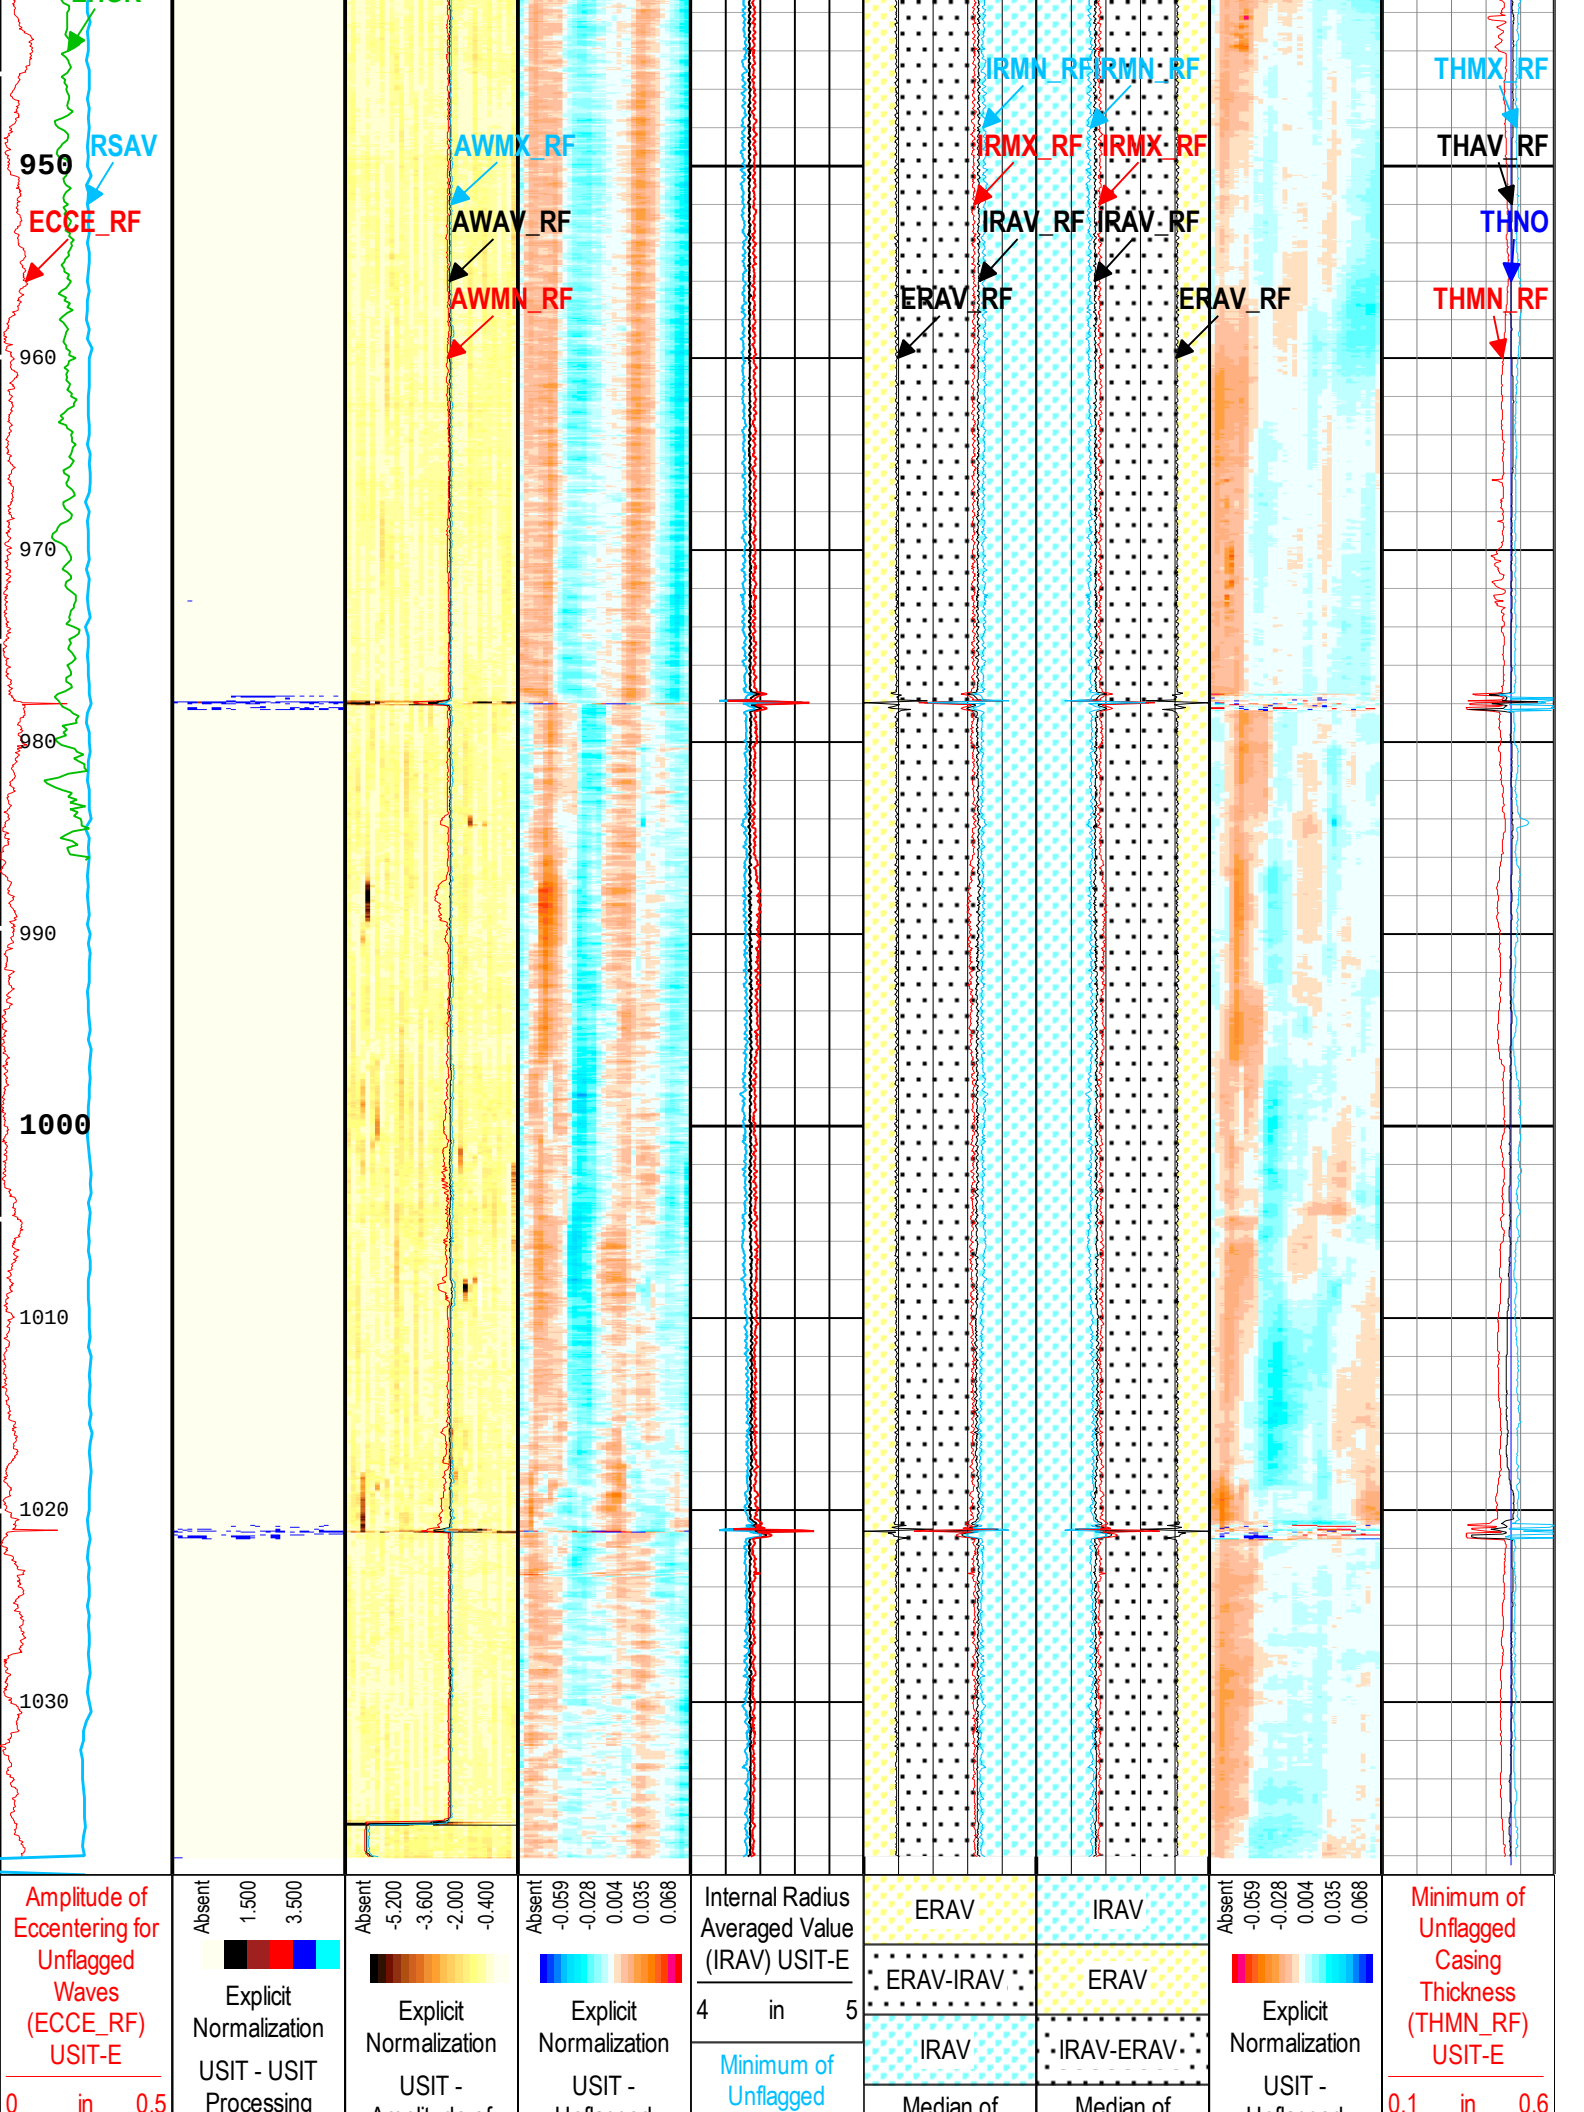
RSAV
ECCE_RF
950
960
970
980
990
1000
1010
1020
1030
AWMX_RF
AWAV_RF
AWMN_RF
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF
Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E
0 in 0.5
Absent 1.500 3.500
Explicit Normalization
USIT - USIT Processing
Absent -5.200 -3.600 -2.000 -0.400
Explicit Normalization
USIT - Amplitude of
Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged
Internal Radius Averaged Value (IRAV) USIT-E
4 in 5
Minimum of Unflagged
ERAV
ERAV-IRAV
IRAV
Median of
IRAV
ERAV
IRAV-ERAV
Median of
Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged
Minimum of Unflagged Casing Thickness (THMN_RF) USIT-E
0.1 in 0.6

Motor Revolution Speed (RSAV) USIT-E
6 c/s 8

Gamma Ray (EHGR) HGNS-H
0 gAPI 150

Flags (UFLG) USIT-E

USIT Processing Flags (UFLG[0]) USIT-E
1 5

Amplitude of Unflagged Wave (AWBK_RF) USIT-E (dB)

Minimum of Unflagged Wave Amplitude (AWMN_RF) USIT-E
0 dB 75

Average of Unflagged Wave Amplitude (AWAV_RF) USIT-E
0 dB 75

Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E
0 dB 75

Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E (in)

Internal Radii (IRMN_RF) USIT-E
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
4 in 5

Median of Unflagged External Radii (ERAV_RF) USIT-E
5 in 4

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
5 in 4

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
5 in 4

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
5 in 4

Median of Unflagged External Radii (ERAV_RF) USIT-E
4 in 5

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
4 in 5

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
4 in 5

Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E (in)

Nominal Casing Thickness (THNO) USIT-E
0.1 in 0.6

Median of Unflagged Casing Thickness (THAV_RF) USIT-E
0.1 in 0.6

Maximum of Unflagged Casing Thickness (THMX_RF) USIT-E
0.1 in 0.6

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - :
2 - UFLG 2 Value within [1.5 - 2.5] - :
3 - UFLG 3 Value within [2.5 - 3.5] - :
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :

- UTIM Error
- Pulse Origin Not Detected
- WINLEN Error
- Casing Thickness Error
- Loop Processing Error

TIME_1900 - Time Marked every 60.00 (s)

Description: USI Composite Format: Log (LBV1_USI Corrosion 9.625inch) Index Scale: 10 in per 100 ft Index Unit: ft Index Type: Measured Depth
Creation Date: 28-Jun-2016 19:09:41

Channel Processing Parameters

28Jun2016: Parameters

Parameter	Description	Tool	Value	Unit
ISSBAR	Barite Mud Presence Flag	Borehole	No	
BHS	Borehole Status (Open or Cased Hole)	Borehole	Cased	
BS	Bit Size	WLSESSION	12.25	in
CBLO	Casing Bottom (Logger)	WLSESSION	6828	ft
CDEN	Cement Density	HGNS-H	2	g/cm3
CMTY(U-USIT_CEMT)	Cement Type	USIT-E	Regular Cement	
THNO	Nominal Casing Thickness - Zoned along logger depths	WLSESSION	0.472	in
CYSTLGR	Casing Yield Strength - Zoned along logger depths	WLSESSION	55000	psi
DFD	Drilling Fluid Density	Borehole	8.6	lbm/gal
DFT	Drilling Fluid Type	Borehole	Water	
DTMD	Borehole Fluid Slowness	Borehole	206	us/ft
FDII	FPM Data Interpolation Interval	USIT-E	0	ft
GCSE_DOWN_PASS	Generalized Caliper Selection for WL Log Down Passes	Borehole	BS	
GCSE_UP_PASS	Generalized Caliper Selection for WL Log Up Passes	Borehole	BS	

HEMA	Hematite Presence Flag	Borehole	No	
ICE_PROCESS	ICE Processing	USIT-E	Yes	
IMAR	Image Rotation	USIT-E	Off	
MEAS_WLEN	Tcube Processing Window Length in Measurement Mode	USIT-E	29.67	us
MUD_N_FRP	Free Pipe Mud Normalization Factor	USIT-E	1.12	
U-USIT_DFSZ	Drilling Fluid Specific Acoustic Impedance	USIT-E	0	Mrayl
UFGDE	Fiberglass Density	USIT-E	1.95	g/cm3
UFGPS	Fiberglass Processing Selection	USIT-E	No	
UFGVL	Fiberglass Velocity	USIT-E	9678.48	ft/s
USI_FSOD	USIT USI Fluid Slowness Fits Casing Outer Diameter	USIT-E	0_OFF	
USI_FVEL_SEL	USI Fluid Velocity Selection	USIT-E	Automatic	
USI_ZMUD_SEL	USI Mud Impedance Selection	USIT-E	FreePipe Norm.	
ZMUD	Acoustic Impedance of Mud	Borehole	1.48	Mrayl
ZTCM	Acoustic Impedance Threshold for Cement	USIT-E	2.6	Mrayl
ZTGS	Acoustic Impedance Threshold for Gas	USIT-E	0.3	Mrayl

Tool Control Parameters

28Jun2016: Parameters

Parameter	Description	Tool	Value	Unit
AGMN	Minimum Gain of Cartridge	USIT-E	-12	dB
AGMX	Maximum Gain of Cartridge	USIT-E	18	dB
U-USIT_DDT5	USIC Downhole Decimation for T5 only	USIT-E	0_NONE	
EMXV	EMEX Voltage	USIT-E	42	V
HRES	Horizontal Resolution	USIT-E	10 deg	
MOTOR_PROTECT	Motor Protection	USIT-E	Off	
TMUC	Type of Mud	USIT-E	BRI	
ULOG	Logging Objective	USIT-E	MEASUREMENT	
UMFR	Modulation Frequency	USIT-E	333333	Hz
USFR	Ultrasonic Sampling Frequency	USIT-E	500000	Hz
UPAT	USIT Emission Pattern	USIT-E	Pattern 500 KHz	
UWKM	USIT Working Mode	USIT-E	Uncompressed 10 deg at 0.6 in LF	
USIT_DEPTHLOG	Starting Depth Log for Ultrasonics	USIT-E	6695	ft
VRES	Vertical Resolution	USIT-E	0.6 in	
WINB	Window Begin Time	USIT-E	45.35	us
WINE	Window End Time	USIT-E	85.35	us

28Jun2016

Very Hi-Res Repeat 10 IN = 100 Ft

Software Version

Acquisition System	Version
Maxwell 2016 SP1	6.1.58882.3100

Pass Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
28Jun2016	Log[5]:Up	Up	5687.24 ft	5871.94 ft	28-Jun-2016 12:19:00 PM	28-Jun-2016 12:30:43 PM	ON	5.50 ft	Yes

All depths are referenced to toolstring zero

Log

Company:Southern California Gas Company Well:Porter 72B

28Jun2016: Log[5]:Up:S005

Description: USI Composite Format: Log (LBV1_USI Corrosion 9.625inch) Index Scale: 10 in per 100 ft Index Unit: ft Index Type: Measured Depth

Creation Date: 28-Jun-2016 19:09:47

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - :
2 - UFLG 2 Value within [1.5 - 2.5] - :
3 - UFLG 3 Value within [2.5 - 3.5] - :
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :

- UTIM Error
- Pulse Origin Not Detected
- WINLEN Error
- Casing Thickness Error
- Loop Processing Error

TIME_1900 - Time Marked every 60.00 (s)

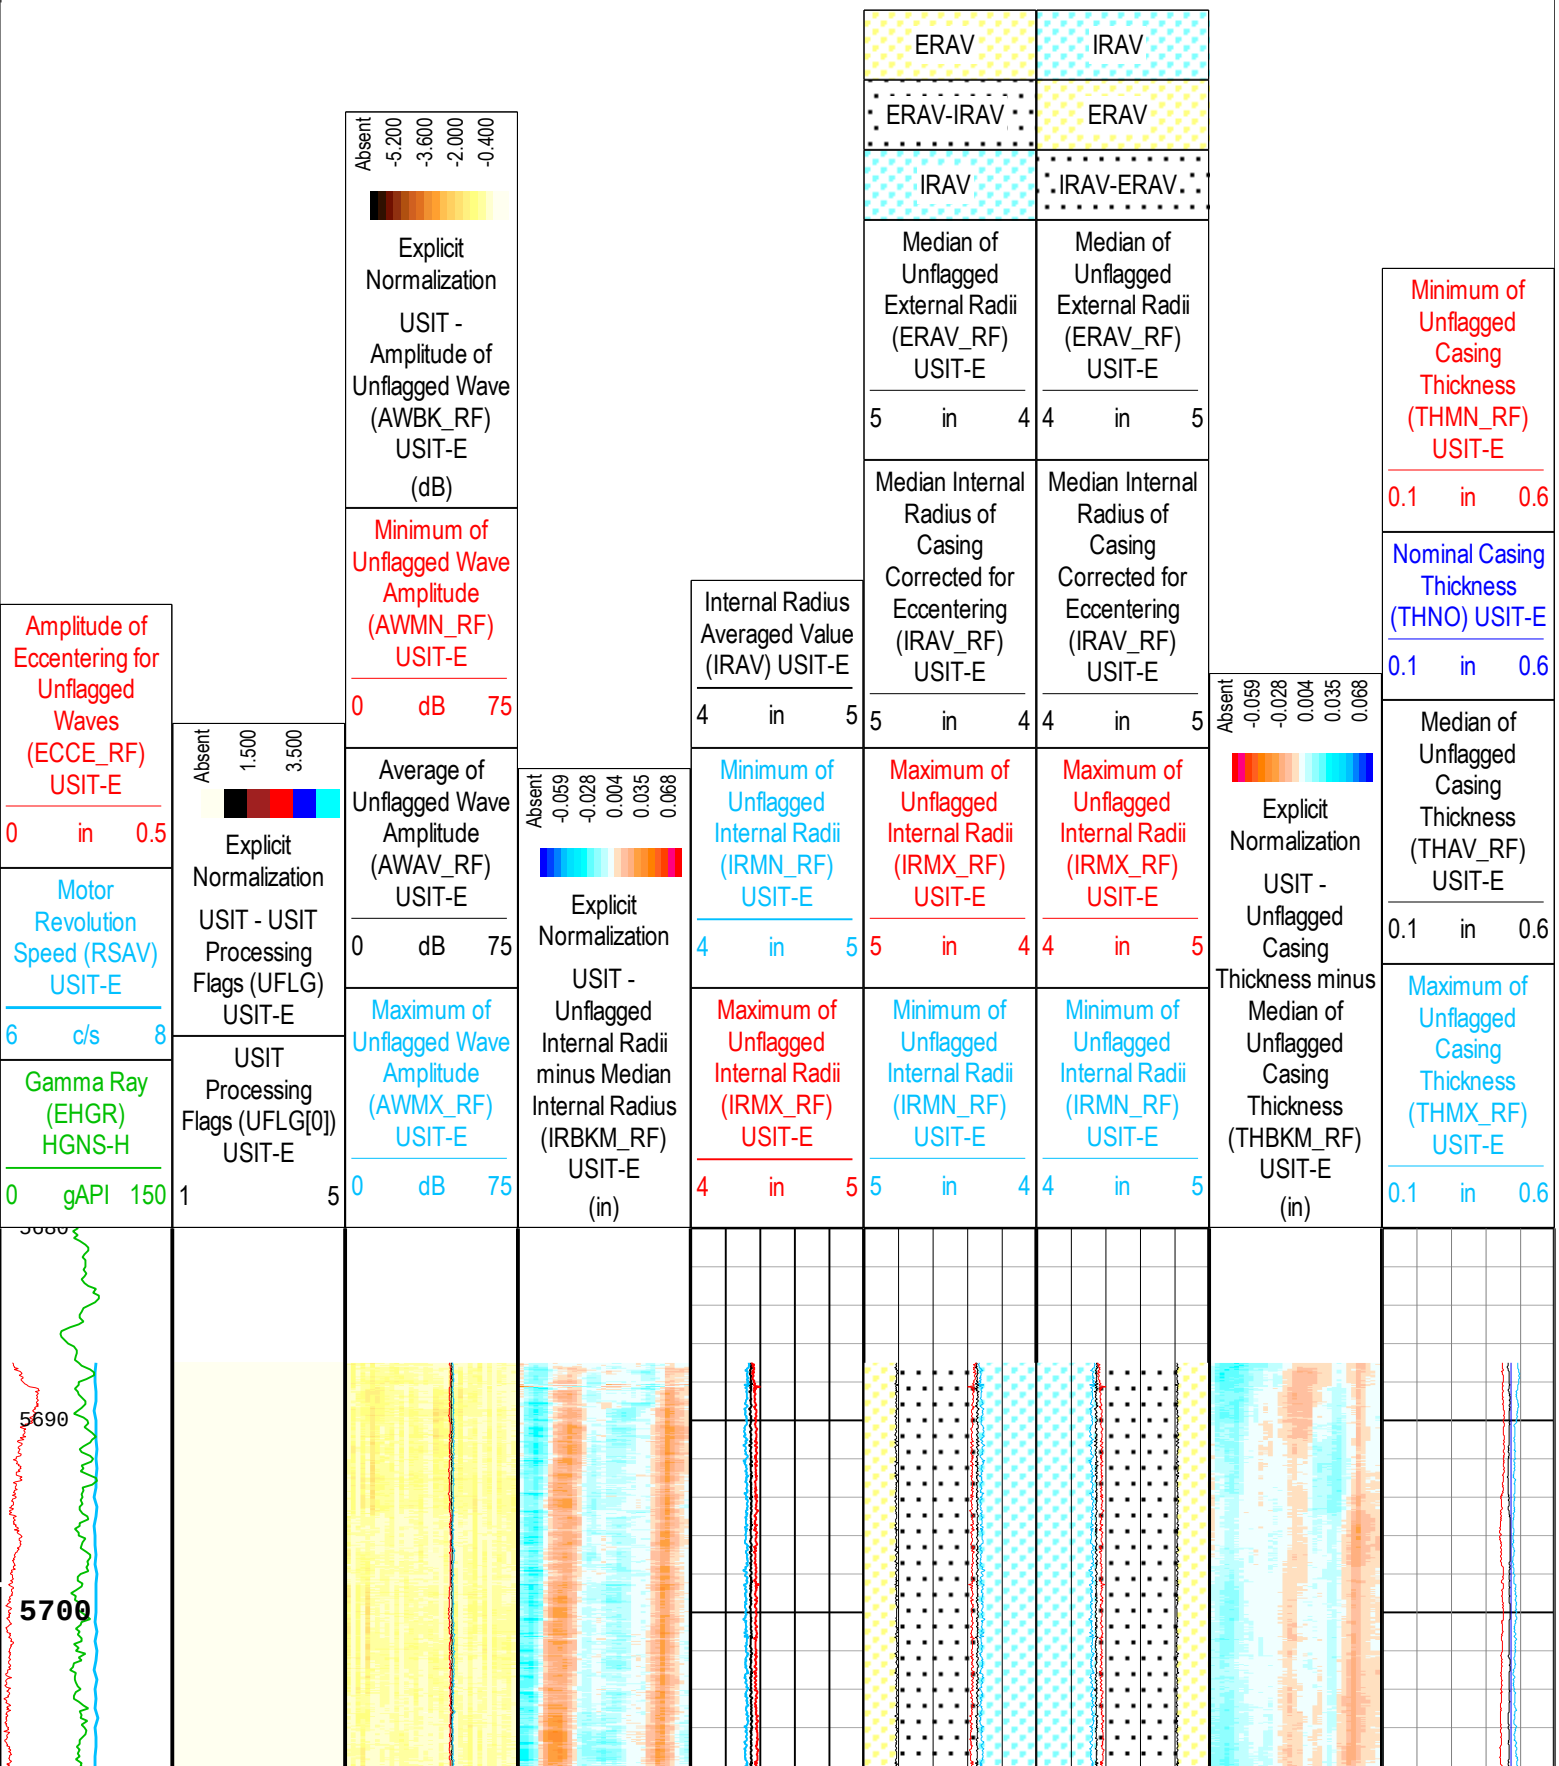

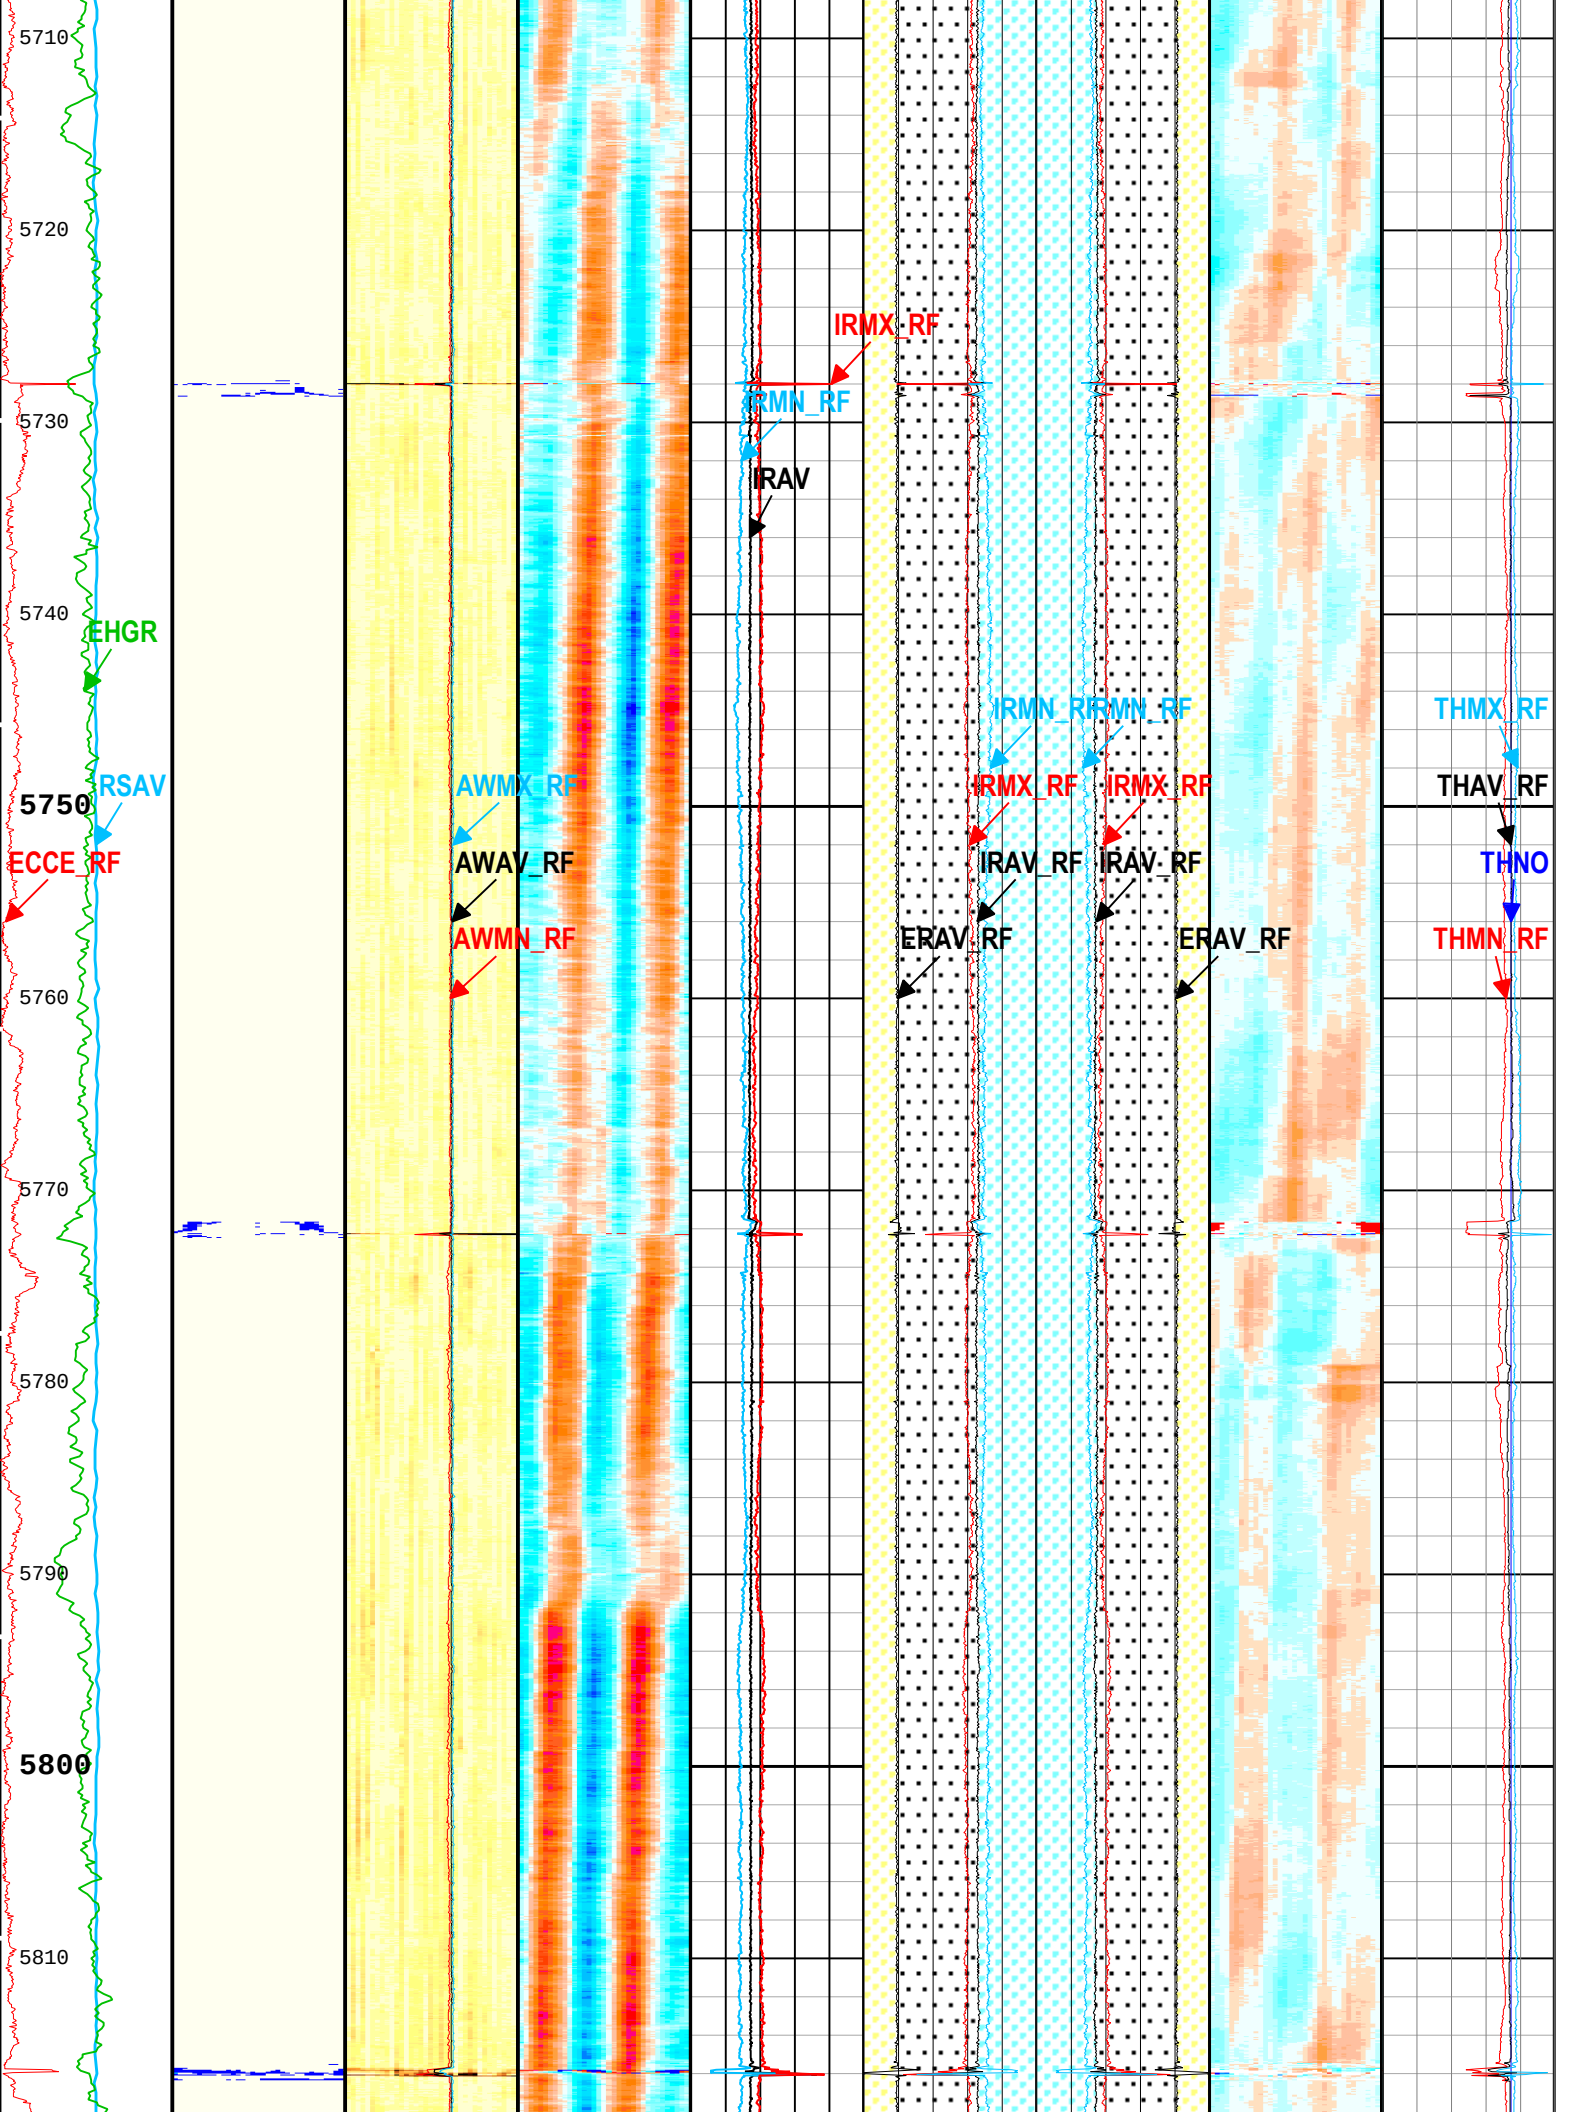
5710
5720
5730
5740
5750
5760
5770
5780
5790
5800
5810
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMX_RF
IRMN_RF
IRAV
IRMN_RF
IRMN_RF
IRMX_RF
IRMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

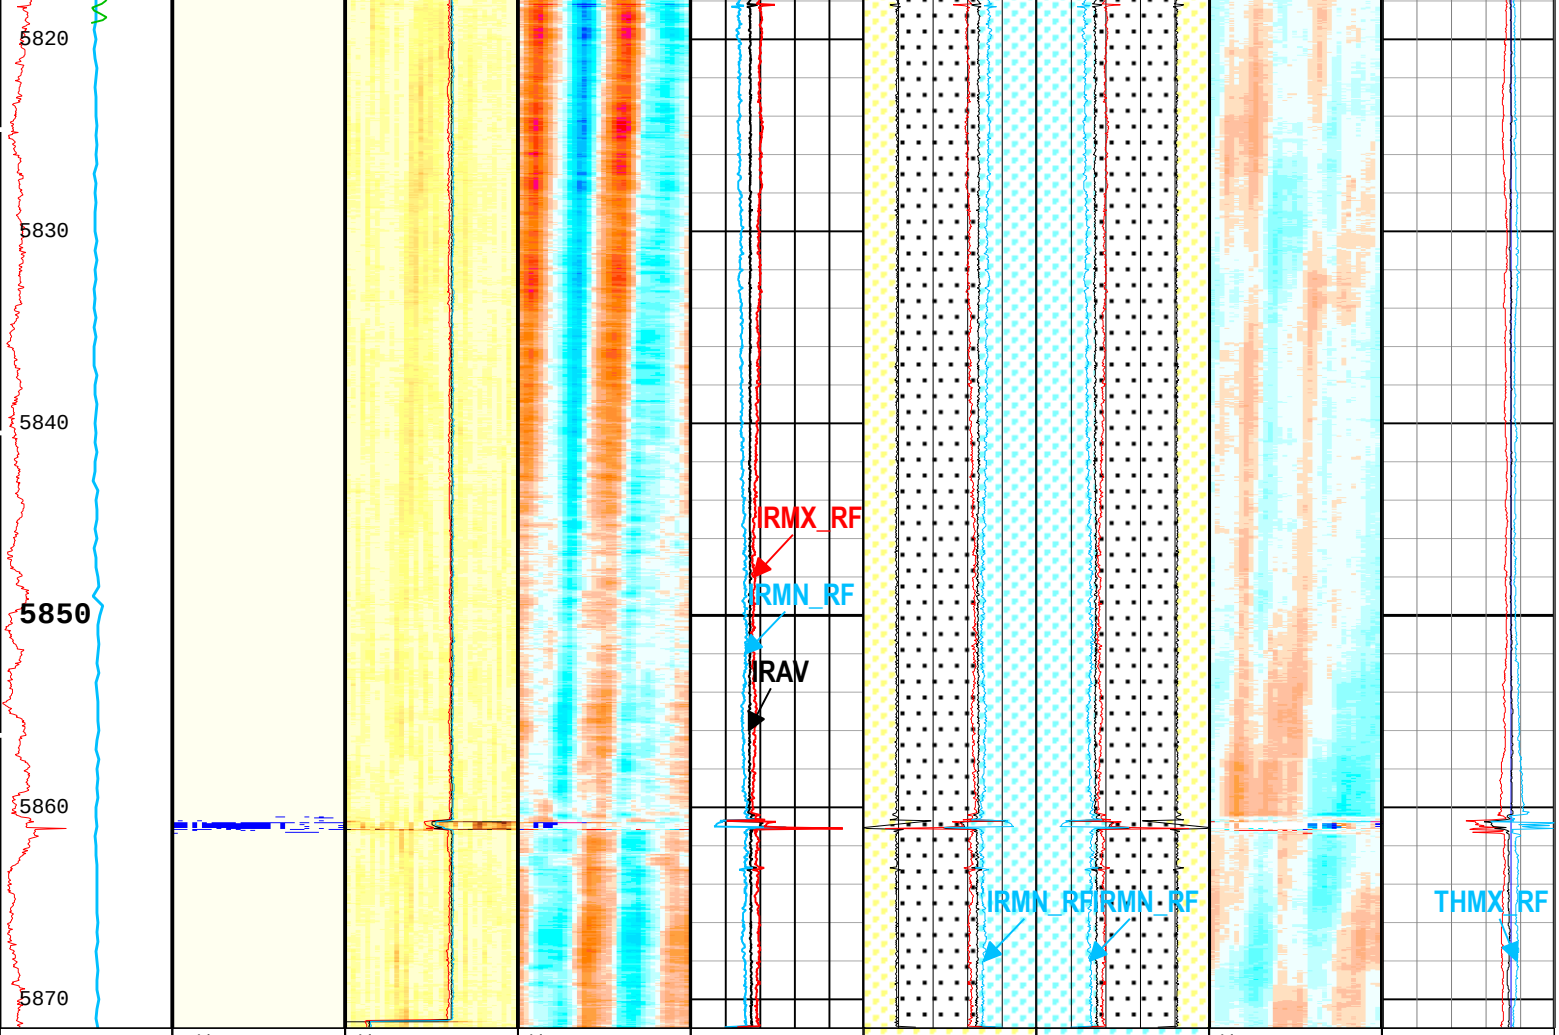

Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E
0 in 0.5

Motor Revolution Speed (RSAV) USIT-E
6 c/s 8

Gamma Ray (EHGR) HGNS-H
0 gAPI 150

Absent 1.500 3.500
Explicit Normalization
USIT - USIT Processing Flags (UFLG) USIT-E

USIT Processing Flags (UFLG[0]) USIT-E
1 5

Absent -5.200 -3.600 -2.000 -0.400
Explicit Normalization
USIT - Amplitude of Unflagged Wave (AWBK_RF) USIT-E (dB)

Minimum of Unflagged Wave Amplitude (AWMN_RF) USIT-E
0 dB 75

Average of Unflagged Wave Amplitude (AWAV_RF) USIT-E
0 dB 75

Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E
0 dB 75

Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E (in)

Internal Radius Averaged Value (IRAV) USIT-E
4 in 5

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
4 in 5

ERAV
ERAV-IRAV
IRAV

Median of Unflagged External Radii (ERAV_RF) USIT-E
5 in 4

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
5 in 4

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
5 in 4

Minimum of Unflagged Internal Radii

IRAV
ERAV
IRAV-ERAV

Median of Unflagged External Radii (ERAV_RF) USIT-E
4 in 5

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
4 in 5

Minimum of Unflagged Internal Radii

Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E (in)

Minimum of Unflagged Casing Thickness (THMN_RF) USIT-E
0.1 in 0.6

Nominal Casing Thickness (THNO) USIT-E
0.1 in 0.6

Median of Unflagged Casing Thickness (THAV_RF) USIT-E
0.1 in 0.6

Maximum of Unflagged Casing Thickness (THMX_RF) USIT-E
0.1 in 0.6

(IRMN_RF) USIT-E	(IRMN_RF) USIT-E
5 in 4	4 in 5

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - :	UTIM Error
2 - UFLG 2 Value within [1.5 - 2.5] - :	Pulse Origin Not Detected
3 - UFLG 3 Value within [2.5 - 3.5] - :	WINLEN Error
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :	Casing Thickness Error
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :	Loop Processing Error

Description: USI Composite Format: Log (LBV1_USI Corrosion 9.625inch) Index Scale: 10 in per 100 ft Index Unit: ft Index Type: Measured Depth
Creation Date: 28-Jun-2016 19:09:47

Channel Processing Parameters

28Jun2016: Parameters

Parameter	Description	Tool	Value	Unit
ISSBAR	Barite Mud Presence Flag	Borehole	No	
BHS	Borehole Status (Open or Cased Hole)	Borehole	Cased	
BS	Bit Size	WLSESSION	12.25	in
CBLO	Casing Bottom (Logger)	WLSESSION	6828	ft
CDEN	Cement Density	HGNS-H	2	g/cm3
CMTY(U-USIT_CEMT)	Cement Type	USIT-E	Regular Cement	
THNO	Nominal Casing Thickness - Zoned along logger depths	WLSESSION	0.472	in
CYSTLGR	Casing Yield Strength - Zoned along logger depths	WLSESSION	55000	psi
DFD	Drilling Fluid Density	Borehole	8.6	lbm/gal
DFT	Drilling Fluid Type	Borehole	Water	
DTMD	Borehole Fluid Slowness	Borehole	206	us/ft
FDII	FPM Data Interpolation Interval	USIT-E	0	ft
GCSE_DOWN_PASS	Generalized Caliper Selection for WL Log Down Passes	Borehole	BS	
GCSE_UP_PASS	Generalized Caliper Selection for WL Log Up Passes	Borehole	BS	
HEMA	Hematite Presence Flag	Borehole	No	
ICE_PROCESS	ICE Processing	USIT-E	Yes	
IMAR	Image Rotation	USIT-E	Off	
MEAS_WLEN	Tcube Processing Window Length in Measurement Mode	USIT-E	29.67	us
MUD_N_FRP	Free Pipe Mud Normalization Factor	USIT-E	1.12	
U-USIT_DFSZ	Drilling Fluid Specific Acoustic Impedance	USIT-E	0	Mrayl
UFGDE	Fiberglass Density	USIT-E	1.95	g/cm3
UFGPS	Fiberglass Processing Selection	USIT-E	No	
UFGVL	Fiberglass Velocity	USIT-E	9678.48	ft/s
USI_FSOD	USIT USI Fluid Slowness Fits Casing Outer Diameter	USIT-E	0_OFF	
USI_FVEL_SEL	USI Fluid Velocity Selection	USIT-E	Automatic	
USI_ZMUD_SEL	USI Mud Impedance Selection	USIT-E	FreePipe Norm.	
ZMUD	Acoustic Impedance of Mud	Borehole	1.48	Mrayl
ZTCM	Acoustic Impedance Threshold for Cement	USIT-E	2.6	Mrayl
ZTGS	Acoustic Impedance Threshold for Gas	USIT-E	0.3	Mrayl

Tool Control Parameters

28Jun2016: Parameters

Parameter	Description	Tool	Value	Unit
AGMN	Minimum Gain of Cartridge	USIT-E	-12	dB

AGMX	Maximum Gain of Cartridge	USIT-E	18	dB
U-USIT_DDT5	USIC Downhole Decimation for T5 only	USIT-E	0_NONE	
EMXV	EMEX Voltage	USIT-E	42	V
HRES	Horizontal Resolution	USIT-E	10 deg	
MOTOR_PROTECT	Motor Protection	USIT-E	Off	
TMUC	Type of Mud	USIT-E	BRI	
ULOG	Logging Objective	USIT-E	MEASUREMENT	
UMFR	Modulation Frequency	USIT-E	333333	Hz
USFR	Ultrasonic Sampling Frequency	USIT-E	500000	Hz
UPAT	USIT Emission Pattern	USIT-E	Pattern 500 KHz	
UWKM	USIT Working Mode	USIT-E	Uncompressed 10 deg at 0.6 in LF	
USIT_DEPTHLOG	Starting Depth Log for Ultrasonics	USIT-E	6695	ft
VRES	Vertical Resolution	USIT-E	0.6 in	
WINB	Window Begin Time	USIT-E	45.35	us
WINE	Window End Time	USIT-E	85.35	us

28Jun2016

Very Hi-Res Repeat 10 IN = 100 Ft

Software Version

Acquisition System	Version
Maxwell 2016 SP1	6.1.58882.3100

Pass Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
28Jun2016	Log[4]:Up	Up	6444.87 ft	6695.08 ft	28-Jun-2016 11:57:50 AM	28-Jun-2016 12:14:38 PM	ON	5.00 ft	Yes

All depths are referenced to toolstring zero

Log

Company:Southern California Gas Company Well:Porter 72B

28Jun2016: Log[4]:Up:S005

Description: USI Composite Format: Log (LBV1_USI Corrosion 9.625inch) Index Scale: 10 in per 100 ft Index Unit: ft Index Type: Measured Depth

Creation Date: 28-Jun-2016 19:09:53

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - : UTIM Error

2 - UFLG 2 Value within [1.5 - 2.5] - : Pulse Origin Not Detected

3 - UFLG 3 Value within [2.5 - 3.5] - : WINLEN Error

4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - : Casing Thickness Error

5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - : Loop Processing Error

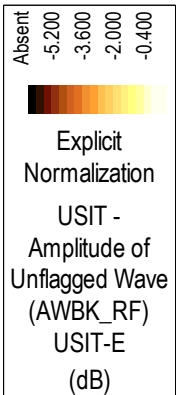

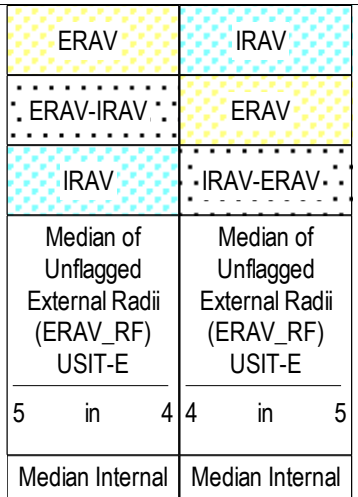

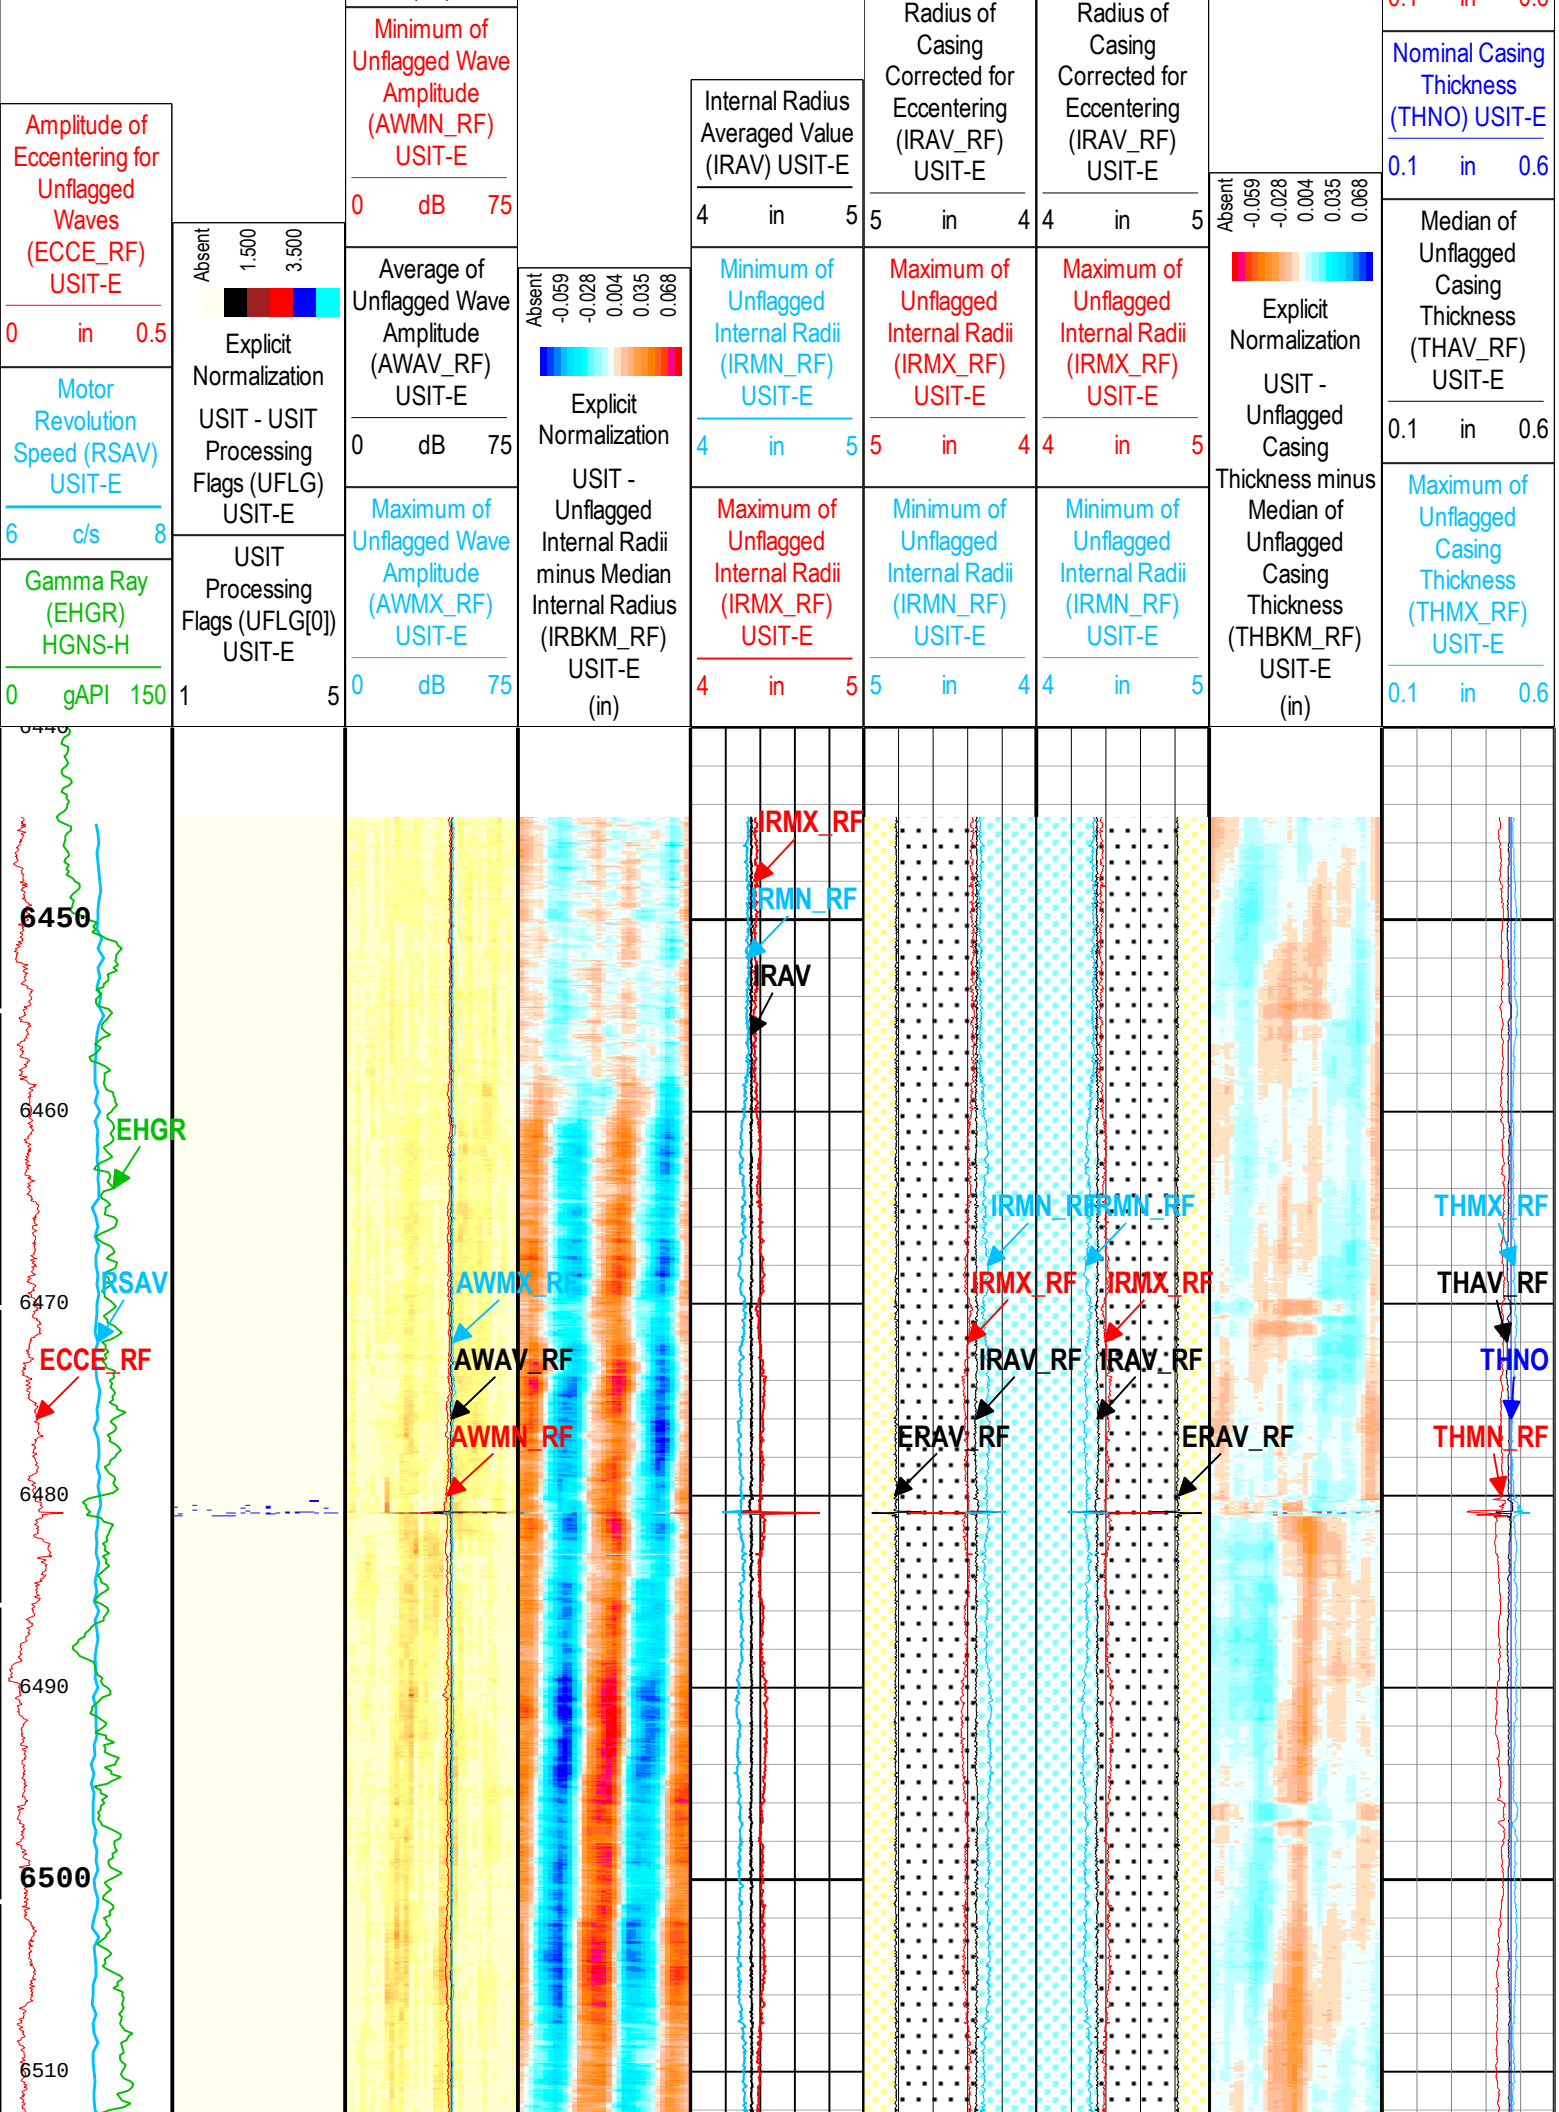
Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E
0 in 0.5
Motor Revolution Speed (RSAV) USIT-E
6 c/s 8
Gamma Ray (EHGR) HGNS-H
0 gAPI 150
Absent 1.500 3.500
Explicit Normalization
USIT - USIT Processing Flags (UFLG) USIT-E
USIT Processing Flags (UFLG[0]) USIT-E
1 5
Minimum of Unflagged Wave Amplitude (AWMN_RF) USIT-E
0 dB 75
Average of Unflagged Wave Amplitude (AWAV_RF) USIT-E
0 dB 75
Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E
0 dB 75
Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E (in)
Internal Radius Averaged Value (IRAV) USIT-E
4 in 5
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
4 in 5
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
4 in 5
Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
5 in 4
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
5 in 4
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
5 in 4
Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
4 in 5
Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
4 in 5
Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
4 in 5
Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E (in)
Nominal Casing Thickness (THNO) USIT-E
0.1 in 0.6
Median of Unflagged Casing Thickness (THAV_RF) USIT-E
0.1 in 0.6
Maximum of Unflagged Casing Thickness (THMX_RF) USIT-E
0.1 in 0.6
6450
6460
6470
6480
6490
6500
6510
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMX_RF
IRMN_RF
IRAV
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
IRMN_RF
IRMX_RF
IRAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

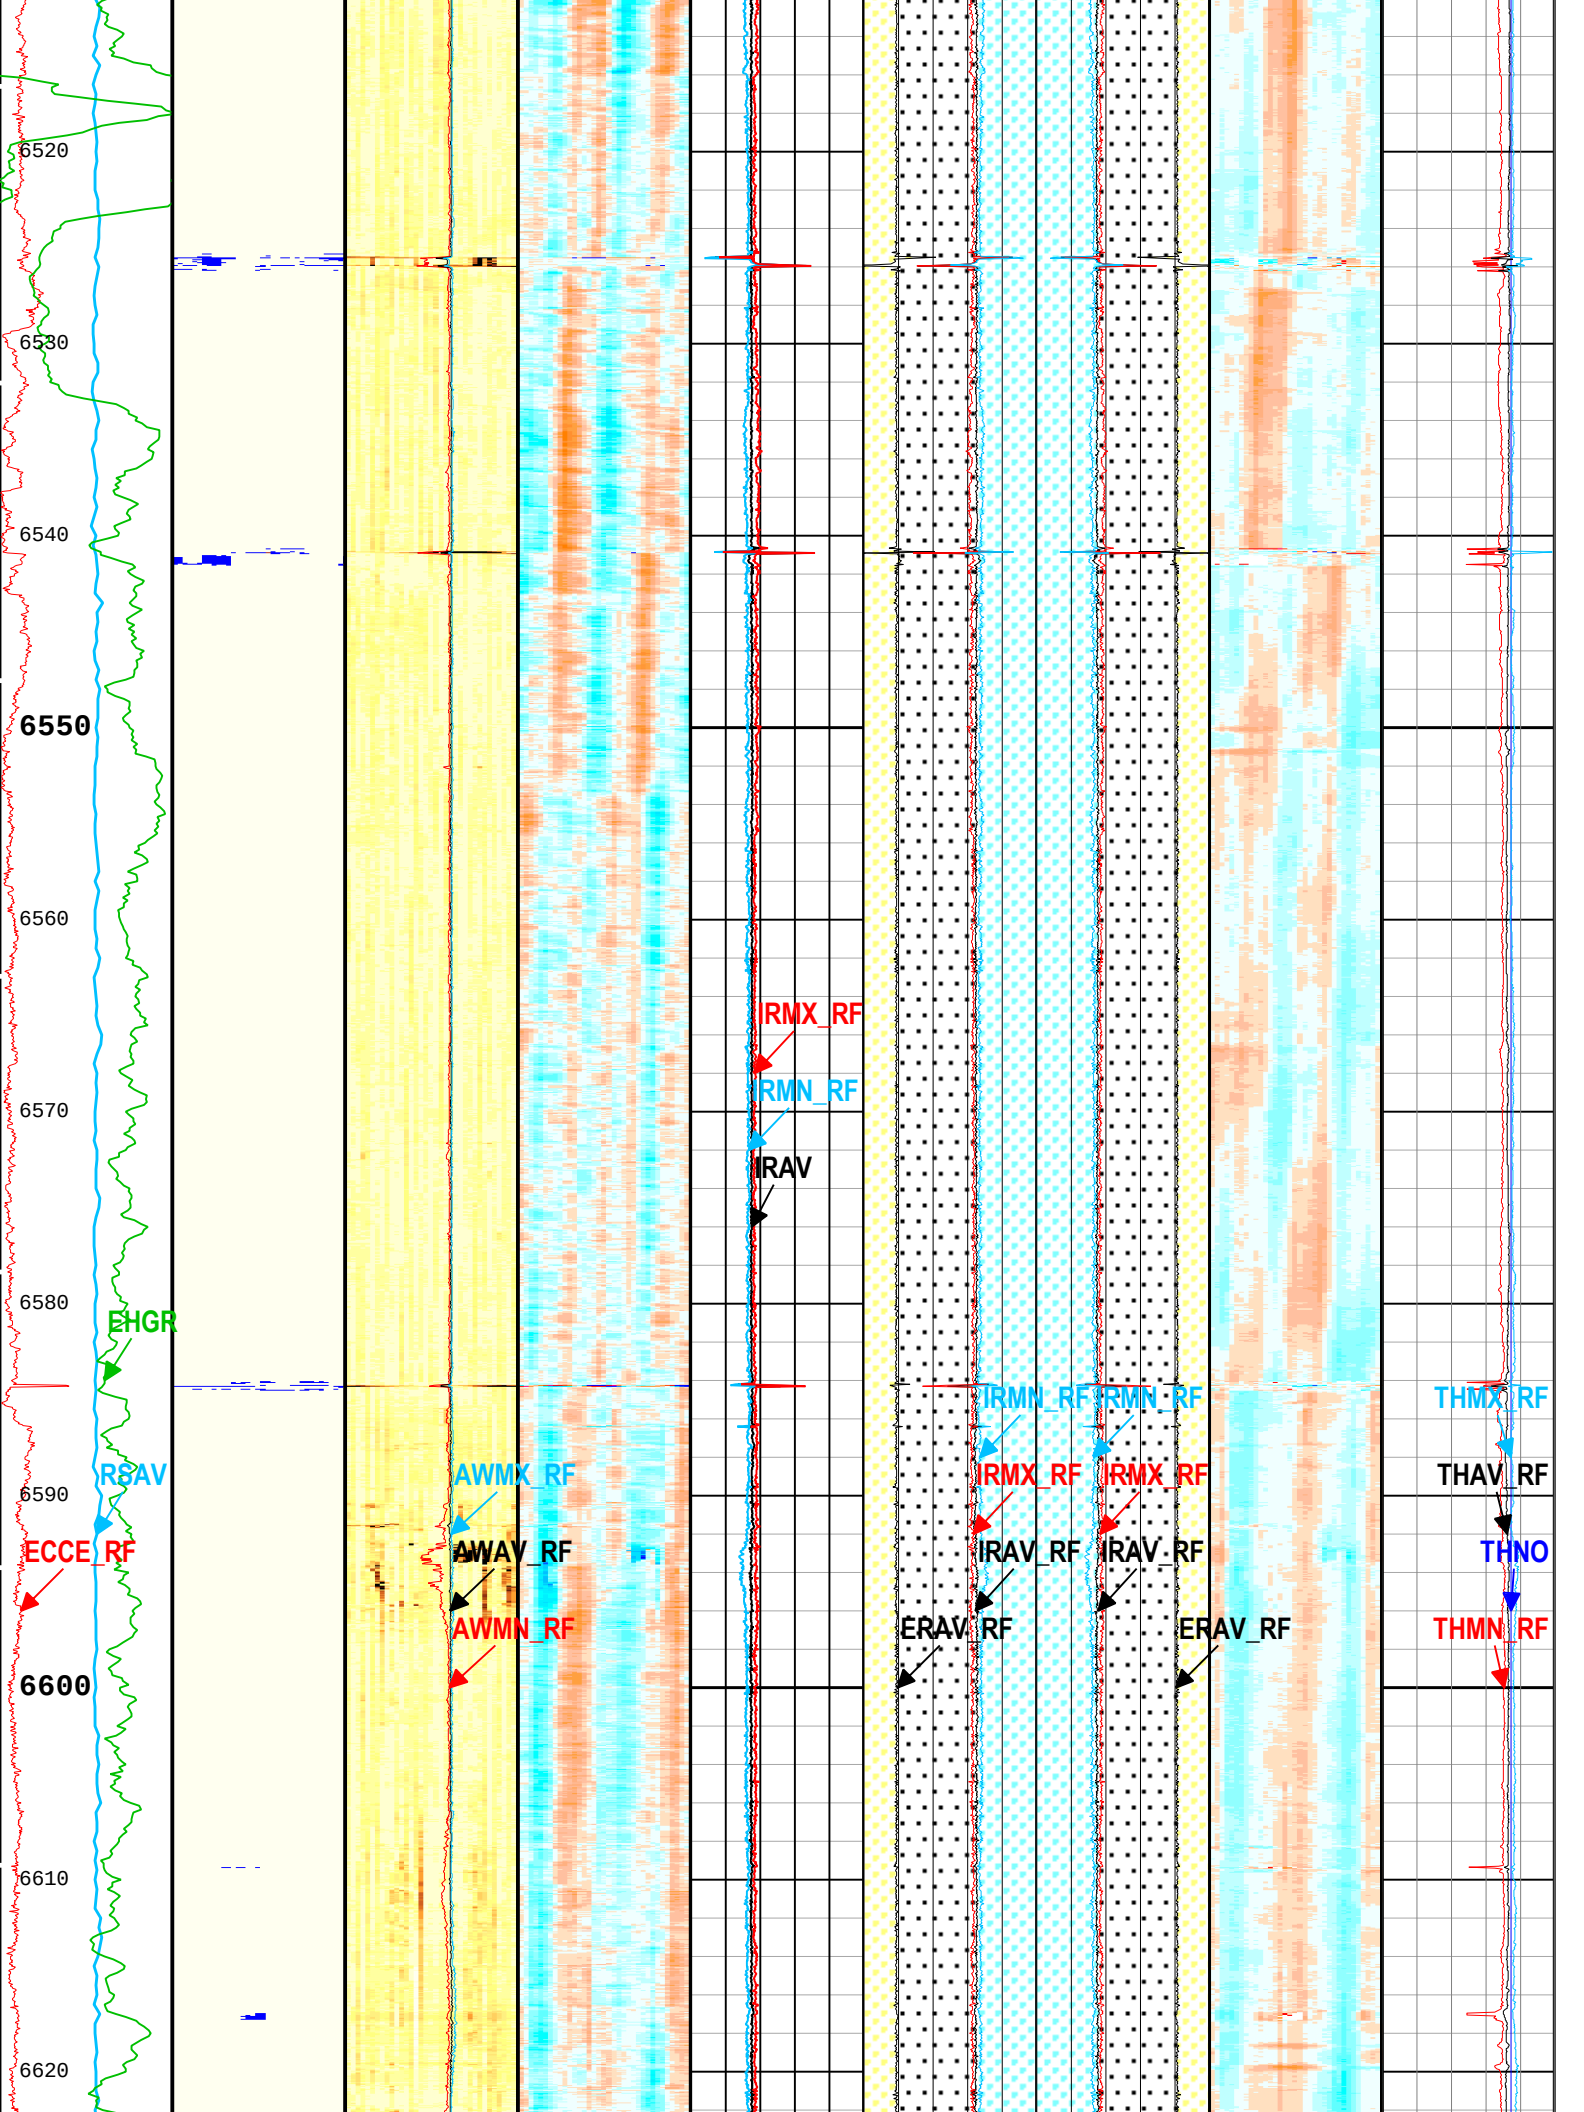
6520
6530
6540
6550
6560
6570
6580
6590
6600
6610
6620
EHGR
RSAV
ECCE_RF
AWMX_RF
AWAV_RF
AWMN_RF
IRMX_RF
IRMN_RF
IRAV
IRMN_RF
RMN_RF
IRMX_RF
RMX_RF
IRAV_RF
IRAV_RF
ERAV_RF
ERAV_RF
THMX_RF
THAV_RF
THNO
THMN_RF

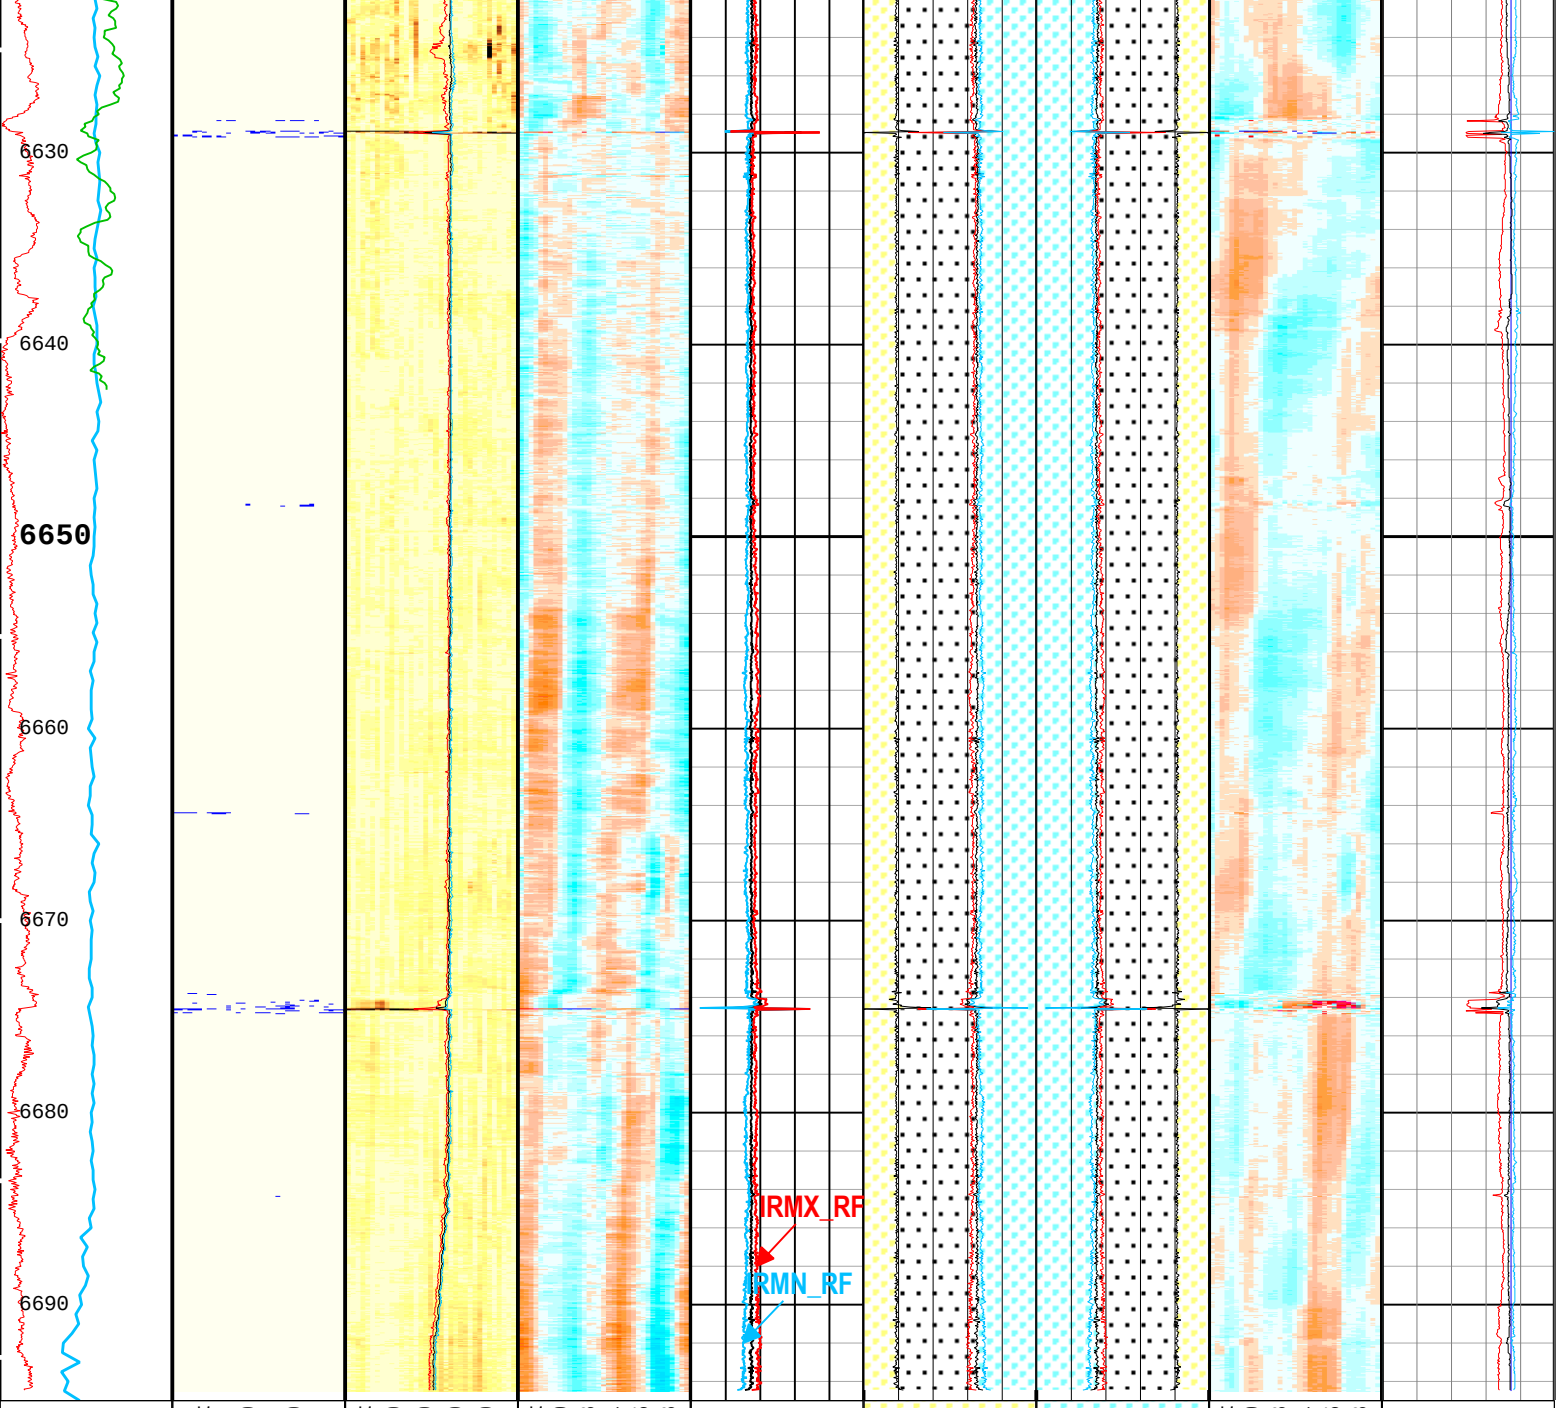

Amplitude of Eccentering for Unflagged Waves (ECCE_RF) USIT-E
0 in 0.5

Motor Revolution Speed (RSAV) USIT-E
6 c/s 8

Gamma Ray (EHGR) HGNS-H
0 gAPI 150

Absent 1.500 3.500
Explicit Normalization
USIT - USIT Processing Flags (UFLG) USIT-E

USIT Processing Flags (UFLG[0]) USIT-E
1 5

Absent -5.200 -3.600 -2.000 -0.400
Explicit Normalization
USIT - Amplitude of Unflagged Wave (AWBK_RF) USIT-E (dB)

Minimum of Unflagged Wave Amplitude (AWMN_RF) USIT-E
0 dB 75

Average of Unflagged Wave

Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Internal Radii minus Median Internal Radius (IRBKM_RF) USIT-E (in)

Internal Radius Averaged Value (IRAV) USIT-E
4 in 5

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E
4 in 5

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E
4 in 5

ERAV
ERAV-IRAV
IRAV

Median of Unflagged External Radii (ERAV_RF) USIT-E
5 in 4

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
5 in 4

IRAV
ERAV
IRAV-ERAV

Median of Unflagged External Radii (ERAV_RF) USIT-E
4 in 5

Median Internal Radius of Casing Corrected for Eccentering (IRAV_RF) USIT-E
4 in 5

Absent -0.059 -0.028 0.004 0.035 0.068
Explicit Normalization
USIT - Unflagged Casing Thickness minus Median of Unflagged Casing Thickness (THBKM_RF) USIT-E (in)

Minimum of Unflagged Casing Thickness (THMN_RF) USIT-E
0.1 in 0.6

Nominal Casing Thickness (THNO) USIT-E
0.1 in 0.6

Median of Unflagged Casing Thickness (THAV_RF) USIT-E
0.1 in 0.6

Amplitude (AWAV_RF) USIT-E		
0	dB	75

Maximum of Unflagged Wave Amplitude (AWMX_RF) USIT-E		
0	dB	75

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E		
5	in	4

Maximum of Unflagged Internal Radii (IRMX_RF) USIT-E		
4	in	5

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E		
5	in	4

Minimum of Unflagged Internal Radii (IRMN_RF) USIT-E		
4	in	5

Maximum of Unflagged Casing Thickness (THMX_RF) USIT-E		
0.1	in	0.6

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - :
2 - UFLG 2 Value within [1.5 - 2.5] - :
3 - UFLG 3 Value within [2.5 - 3.5] - :
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :

- UTIM Error
- Pulse Origin Not Detected
- WINLEN Error
- Casing Thickness Error
- Loop Processing Error

TIME_1900 - Time Marked every 60.00 (s)

Description: USI Composite Format: Log (LBV1_USI Corrosion 9.625inch) Index Scale: 10 in per 100 ft Index Unit: ft Index Type: Measured Depth
Creation Date: 28-Jun-2016 19:09:53

Channel Processing Parameters

28Jun2016: Parameters

Parameter	Description	Tool	Value	Unit
ISSBAR	Barite Mud Presence Flag	Borehole	No	
BHS	Borehole Status (Open or Cased Hole)	Borehole	Cased	
BS	Bit Size	WLSESSION	12.25	in
CBLO	Casing Bottom (Logger)	WLSESSION	6828	ft
CDEN	Cement Density	HGNS-H	2	g/cm3
CMTY(U-USIT_CEMT)	Cement Type	USIT-E	Regular Cement	
THNO	Nominal Casing Thickness - Zoned along logger depths	WLSESSION	0.472	in
CYSTLGR	Casing Yield Strength - Zoned along logger depths	WLSESSION	55000	psi
DFD	Drilling Fluid Density	Borehole	8.6	lbm/gal
DFT	Drilling Fluid Type	Borehole	Water	
DTMD	Borehole Fluid Slowness	Borehole	206	us/ft
FDII	FPM Data Interpolation Interval	USIT-E	0	ft
GCSE_DOWN_PASS	Generalized Caliper Selection for WL Log Down Passes	Borehole	BS	
GCSE_UP_PASS	Generalized Caliper Selection for WL Log Up Passes	Borehole	BS	
HEMA	Hematite Presence Flag	Borehole	No	
ICE_PROCESS	ICE Processing	USIT-E	Yes	
IMAR	Image Rotation	USIT-E	Off	
MEAS_WLEN	Tcube Processing Window Length in Measurement Mode	USIT-E	29.67	us
MUD_N_FRP	Free Pipe Mud Normalization Factor	USIT-E	1.12	
U-USIT_DFSZ	Drilling Fluid Specific Acoustic Impedance	USIT-E	0	Mrayl
UFGDE	Fiberglass Density	USIT-E	1.95	g/cm3
UFGPS	Fiberglass Processing Selection	USIT-E	No	
UFGVL	Fiberglass Velocity	USIT-E	9678.48	ft/s
USI_FSOD	USIT USI Fluid Slowness Fits Casing Outer Diameter	USIT-E	0_OFF	
USI_FVEL_SEL	USI Fluid Velocity Selection	USIT-E	Automatic	

USI_ZMUD_SEL	USI Mud Impedance Selection	USIT-E	FreePipe Norm.	
ZMUD	Acoustic Impedance of Mud	Borehole	1.48	Mrayl
ZTCM	Acoustic Impedance Threshold for Cement	USIT-E	2.6	Mrayl
ZTGS	Acoustic Impedance Threshold for Gas	USIT-E	0.3	Mrayl

Tool Control Parameters

28Jun2016: Parameters

Parameter	Description	Tool	Value	Unit
AGMN	Minimum Gain of Cartridge	USIT-E	-12	dB
AGMX	Maximum Gain of Cartridge	USIT-E	18	dB
U-USIT_DDT5	USIC Downhole Decimation for T5 only	USIT-E	0_NONE	
EMXV	EMEX Voltage	USIT-E	42	V
HRES	Horizontal Resolution	USIT-E	10 deg	
MOTOR_PROTECT	Motor Protection	USIT-E	Off	
TMUC	Type of Mud	USIT-E	BRI	
ULOG	Logging Objective	USIT-E	MEASUREMENT	
UMFR	Modulation Frequency	USIT-E	333333	Hz
USFR	Ultrasonic Sampling Frequency	USIT-E	500000	Hz
UPAT	USIT Emission Pattern	USIT-E	Pattern 500 KHz	
UWKM	USIT Working Mode	USIT-E	Uncompressed 10 deg at 0.6 in LF	
USIT_DEPTHLOG	Starting Depth Log for Ultrasonics	USIT-E	6695	ft
VRES	Vertical Resolution	USIT-E	0.6 in	
WINB	Window Begin Time	USIT-E	45.35	us
WINE	Window End Time	USIT-E	85.35	us

Fluid Acoustic Slowness vs Depth

2D Cross Plot

Index Range: From 6693.00 to 90.25 ft

DEPTH-U-USIT_DFSL — — - DEPTH-CFVL
— — - DEPTH-FVEM (FVEM : Data Not Found)

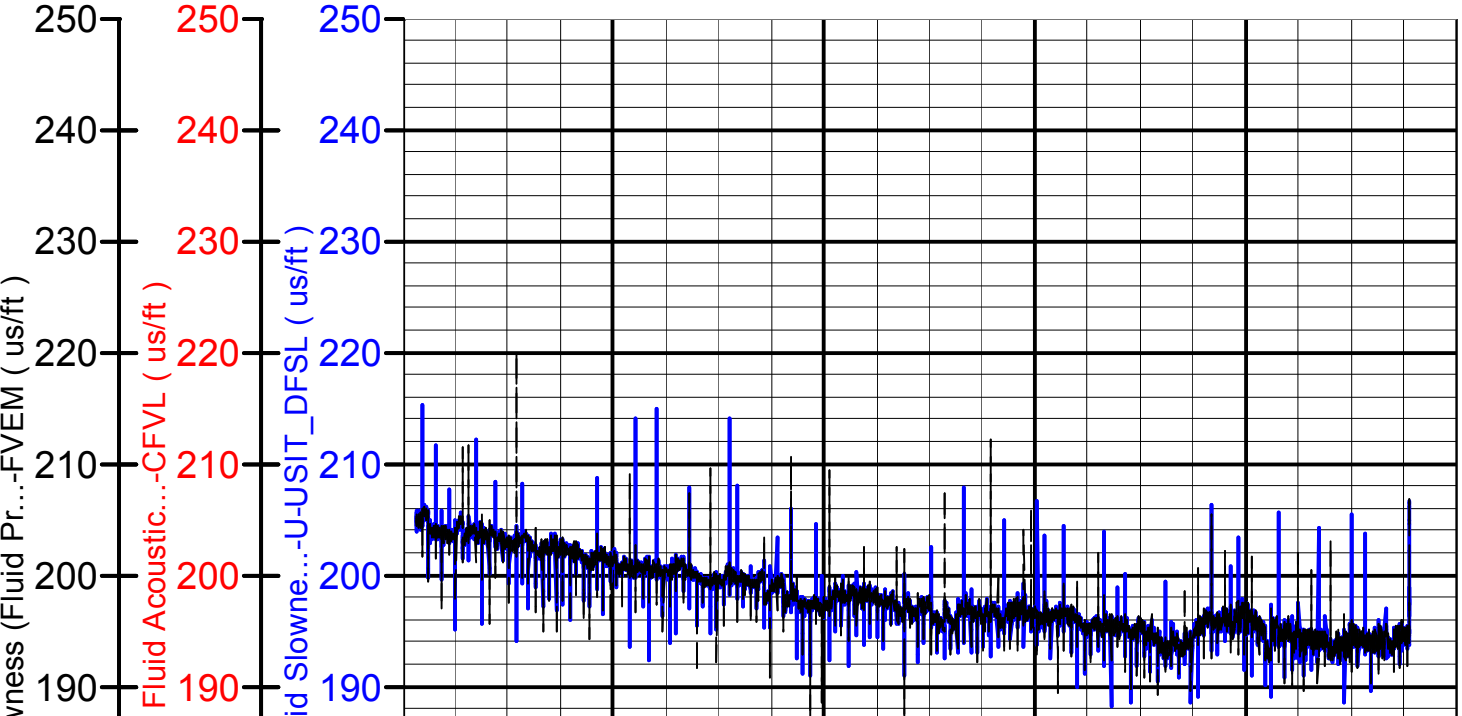

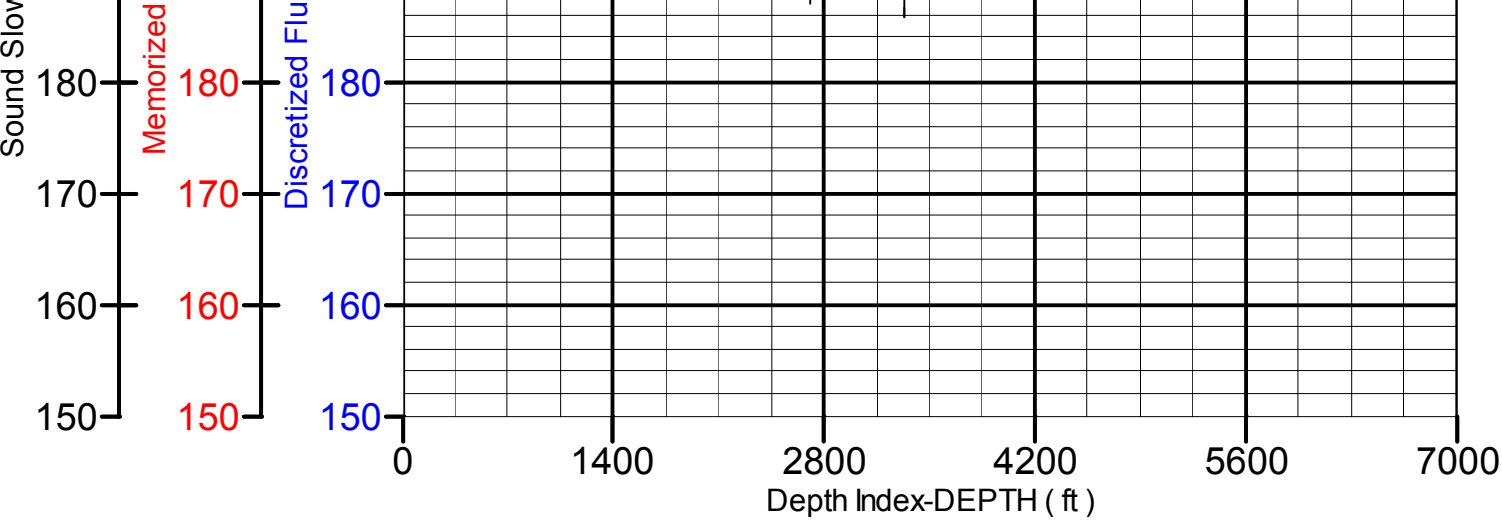

XYZ

Company:Southern California Gas Company Well:Porter 72B

28Jun2016: Log[3]:Up:S005

Theoretical Acoustic Impedance of Mud vs Depth

2D Cross Plot

Index Range: From 6693.00 to 90.25 ft

DEPTH-CZMD
DEPTH-AIBH (AIBH : Data Not Found)
DEPTH-AIBL (AIBL : Data Not Found)
DEPTH-AIBM (AIBM : Data Not Found)

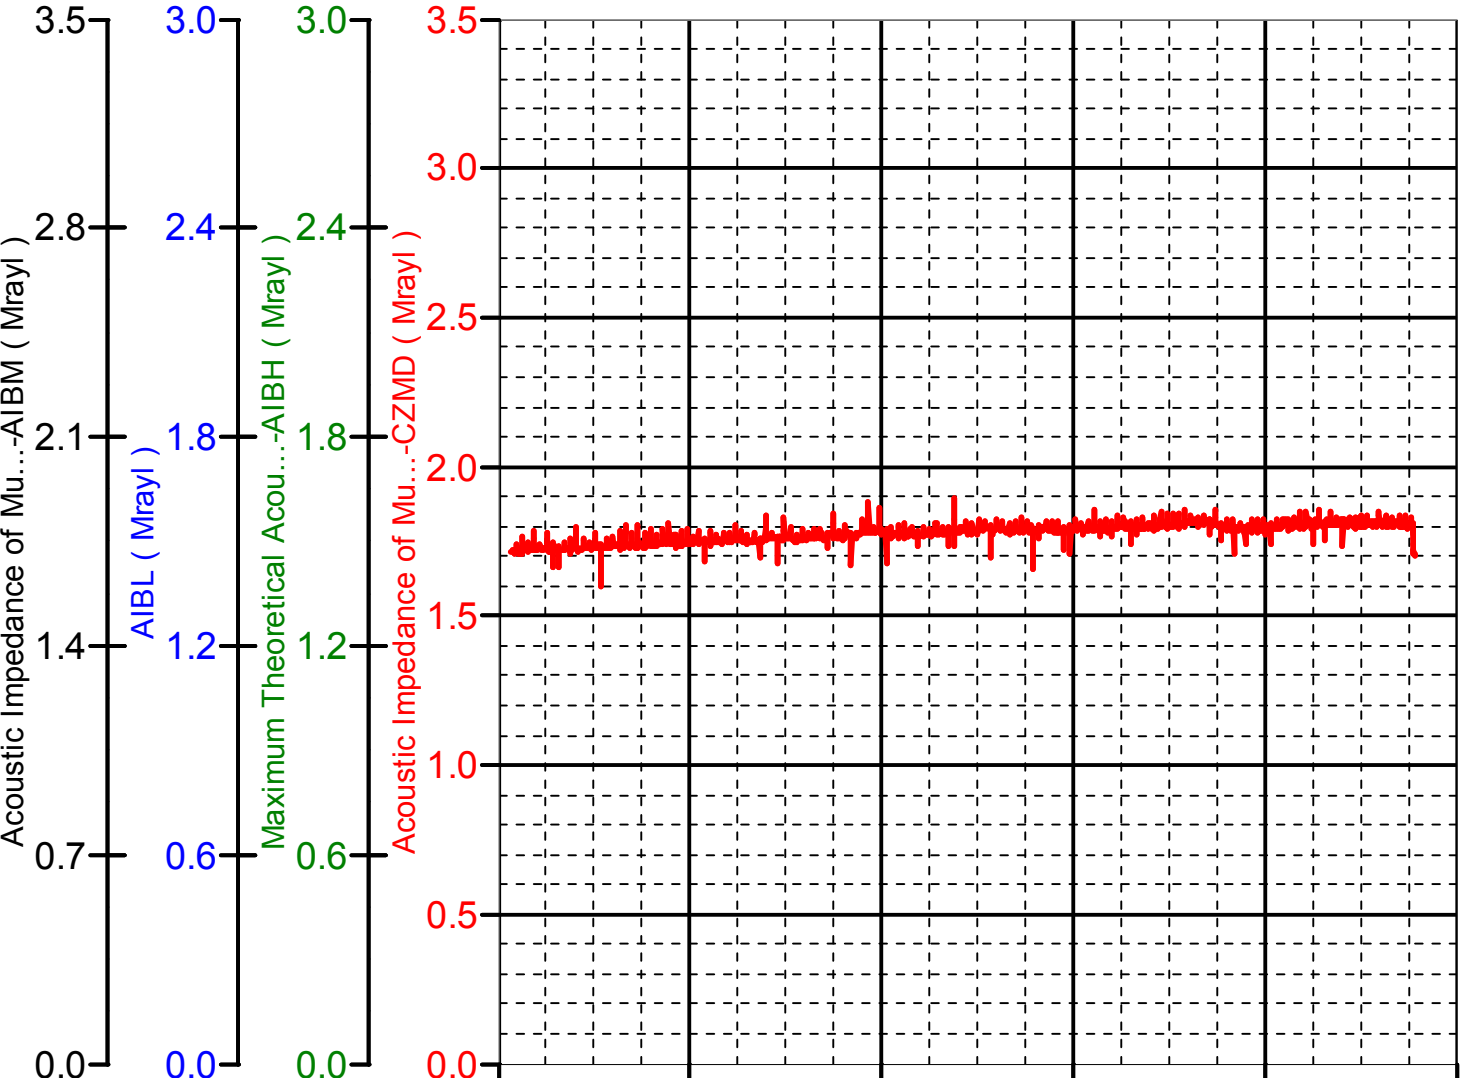


0
1400
2800
4200
5600
7000
Depth Index-DEPTH (ft)

Company:	Southern California Gas Company
Well:	Porter 72B
Field:	Aliso Canyon
County:	Los Angeles
State:	California

Schlumberger

Ultrasonic Imager

Gamma Ray - CCL

9-5/8" 47# casing