


Company: MACHPERSON OIL COMPANY		Field: ROUND MOUNTAIN SEC 20 TWN 28S RGE 29E API 0403057593			Well No: USL 20 #2950	
Log Type: WATER INJECTION PROFILE		Perfs: 5-1/2" 1896-1936, 1956-1976, 1994-2024				
Date: 09-28-2016	MEAS. REF: 13' K.B.	Rmks: TOP PERF & PACKER CHECK OK. TUBING CHECKED OK @ 25' & PACKER. D.O.G.G.R. NOTIFIED.				16" 0 - 93
Co. Rate: (PER OPERATOR) 135 B/D						9-5/8" 36 # 0 - 1030
Tbg Press: 70 psi						5-1/2" 17 # 0 - 2088
Csg Press: 0 psi						XJ @ 1832 - 1850
Pick-Up: 2051' Fill: 4' F. L.: SURFACE						2-7/8" 0 - 1888
Survey Rate: 100 B/D		Packer @ 1881 - 1887	Plug Depth @ 2055			

WATER INJECTION PROFILE

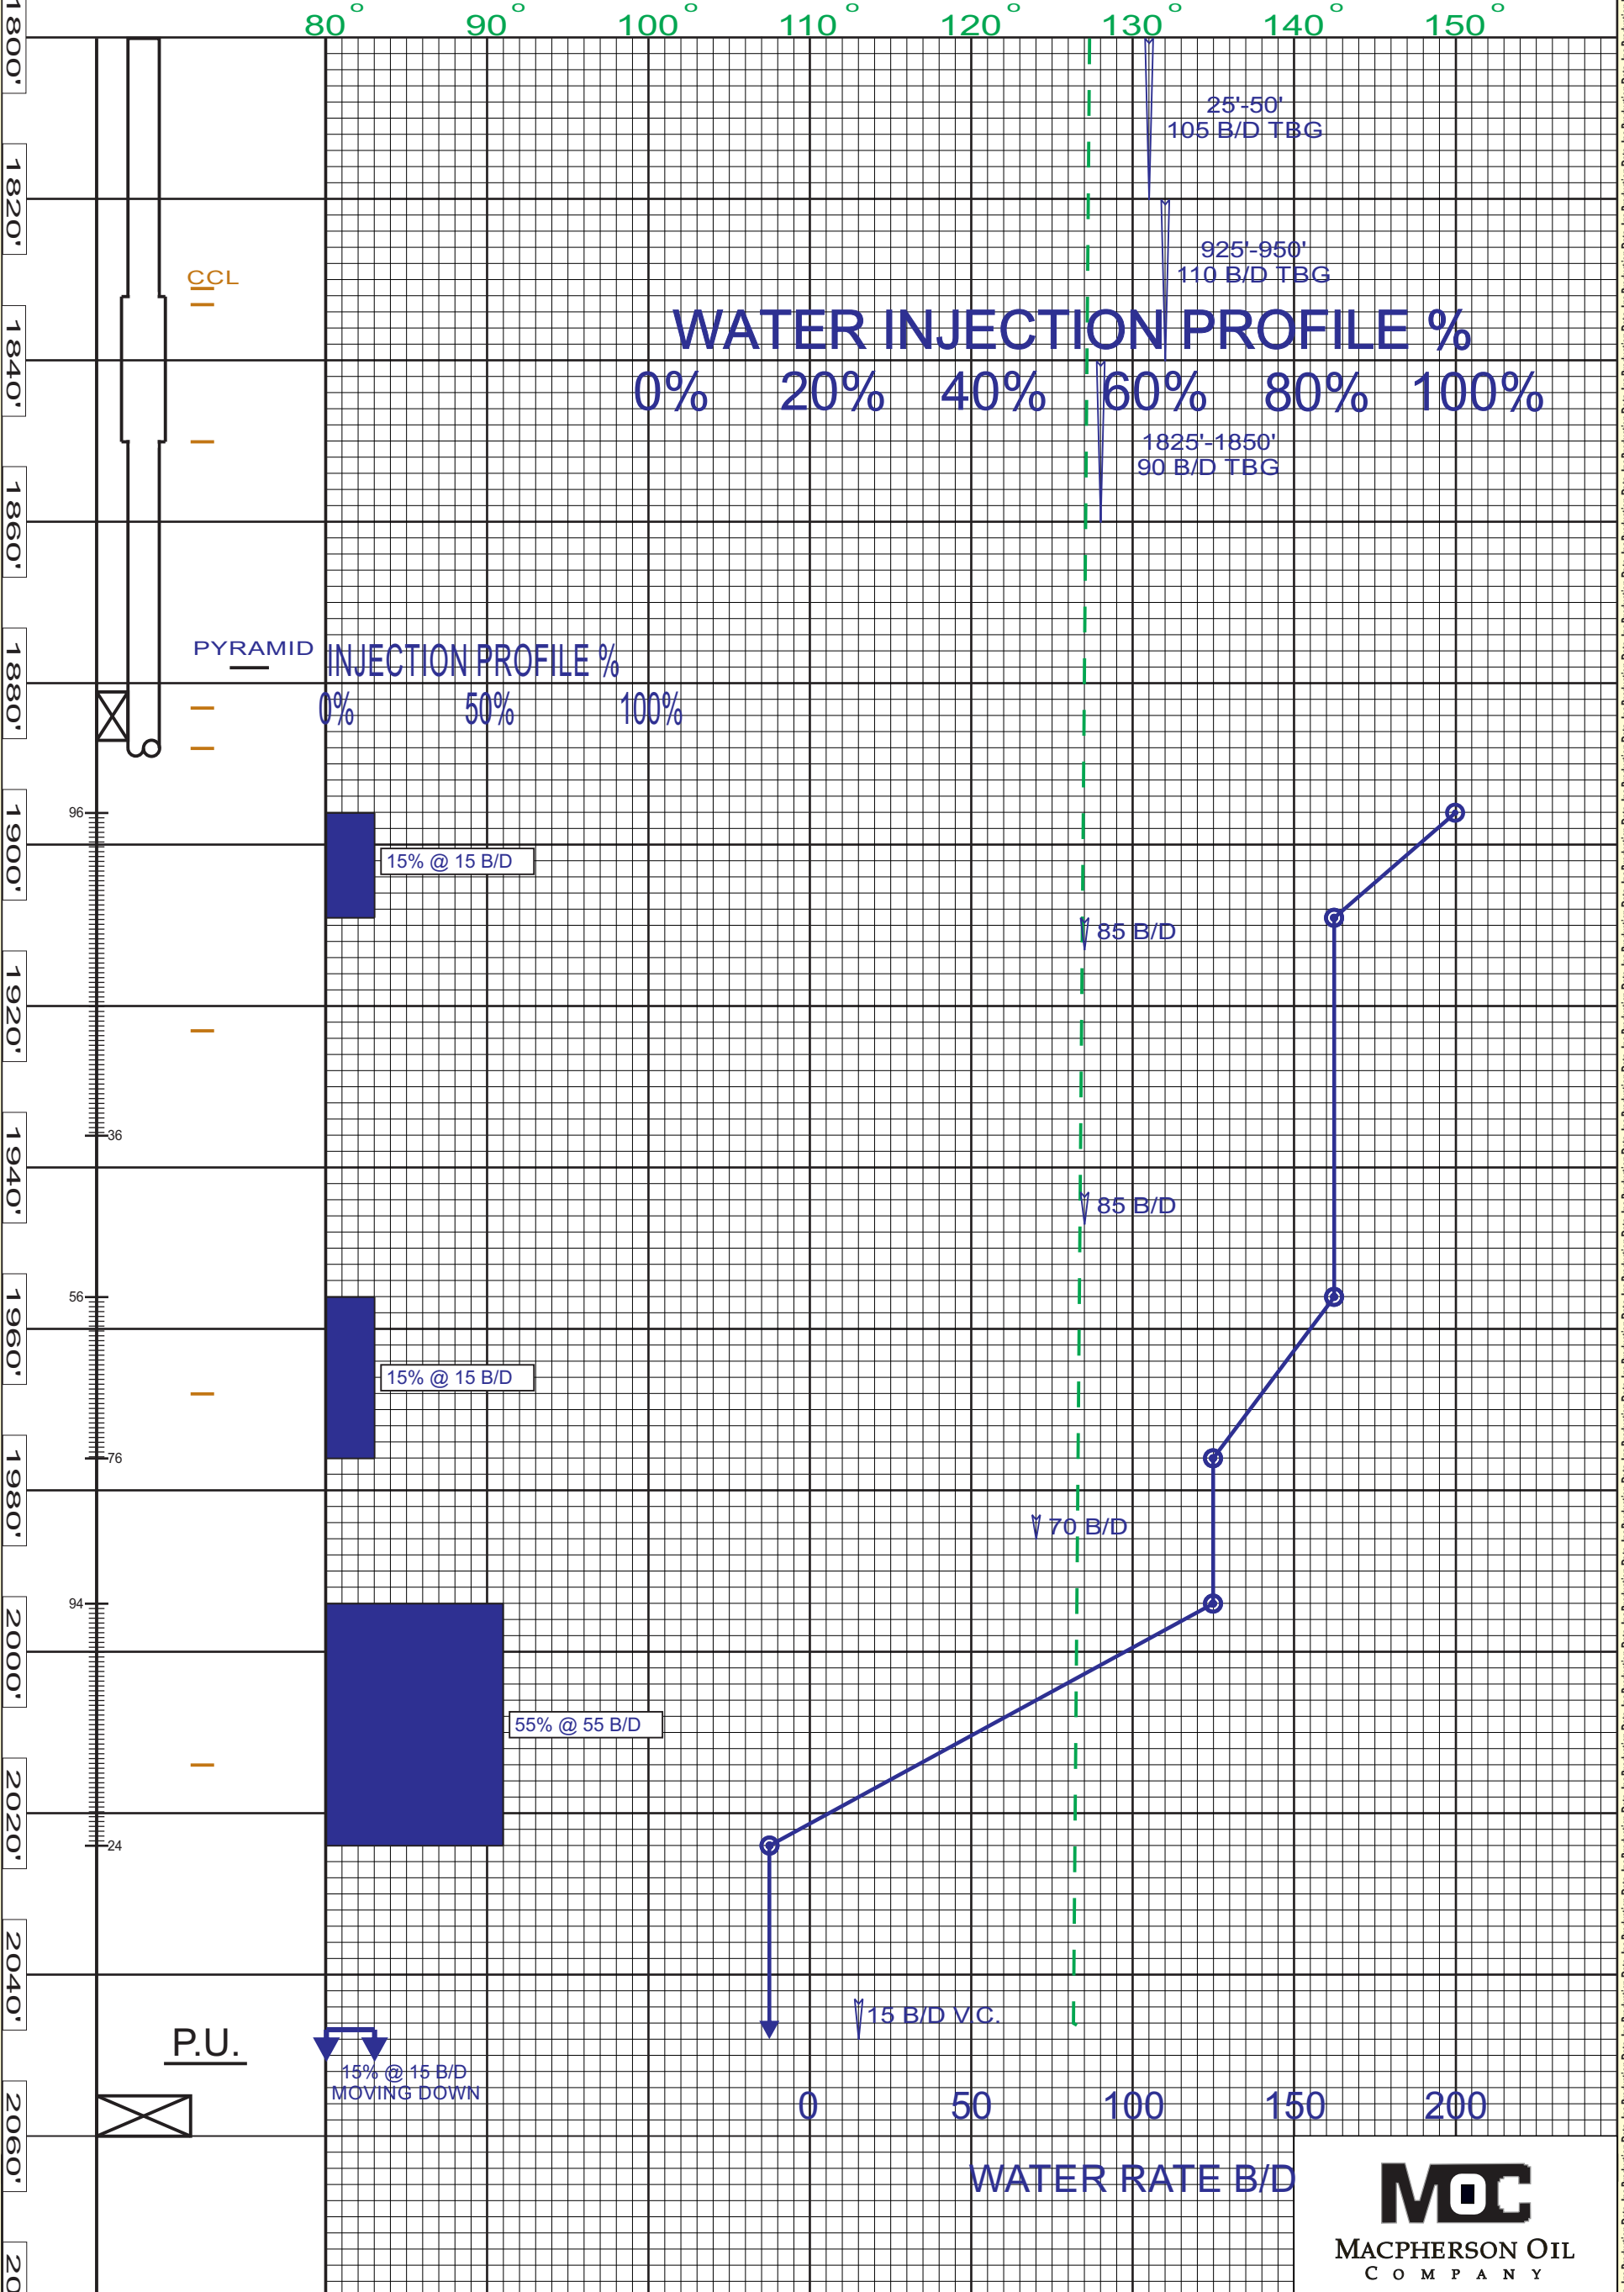

Company: MACHPERSON OIL COMPANY		Field: ROUND MOUNTAIN SEC 20 TWN 28S RGE 29E API 0403057593	Well No: USL 20 #2950
Log Type: WATER INJECTION PROFILE		Perfs: 5-1/2" 1896-1936, 1956-1976, 1994-2024	
Date: 09-28-2016	MEAS. REF: 13' K.B.	Rmks: TOP PERF & PACKER CHECK OK. TUBING CHECKED OK @ 25' & PACKER. D.O.G.G.R. NOTIFIED.	
Co. Rate: (PER OPERATOR) 135 B/D			
Tbg Press: 70 psi			
Csg Press: 0 psi			
Pick-Up: 2051'	Fill: 4' F.L.: SURFACE		
Survey Rate: 100 B/D		16" 0 - 93	
		9-5/8" 36 # 0 - 1030	
		5-1/2" 17 # 0 - 2088	
		2-7/8" 0 - 1888	
		XJ @ 1832 - 1850	
		Packer @ 1881 - 1887	
		Plug Depth @ 2055	

MIGRATION CHECK

340 SEC TIME RECORDING

TOP PERF & PACKER CHECK @ 1850'.
INJECTED R/A OUT & BY.
WAITED 340 SEC BEFORE
STARTING LOGGING RUNS.

